

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)
[DSS10-01AS-TUB](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




DSS 10-01A
DSS 10-01AS

Power Schottky Rectifier


$I_{FAV} = 10\text{ A}$
 $V_{RRM} = 100\text{ V}$
 $V_F = 0.66\text{ V}$

V_{RSM}	V_{RRM}	Type
V	V	
100	100	DSS 10-01A DSS 10-01AS



TO-263 AB
(...S-Type)

TO-220 AC

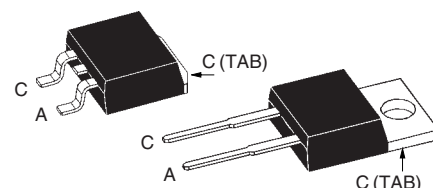

A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings	
I_{FRMS}		35	A
I_{FAV}	$T_C = 160^\circ\text{C}$; rectangular, $d = 0.5$	10	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t_p = 10\text{ ms}$ (50 Hz), sine	120	A
E_{AS}	$I_{AS} = 5\text{ A}$; $L = 100\text{ }\mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive	1.3	mJ
I_{AR}	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10\text{ kHz}$; repetitive	0.8	A
$(dv/dt)_{cr}$		5000	V/ μs
T_{VJ}		-55...+175	$^\circ\text{C}$
T_{VJM}		175	$^\circ\text{C}$
T_{stg}		-55...+150	$^\circ\text{C}$
P_{tot}	$T_C = 25^\circ\text{C}$	90	W
M_d	mounting torque (A-Type only)	0.4...0.6	Nm
Weight	typical	2	g

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM} -values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$	0.3	mA
	$V_R = V_{RRM}$; $T_{VJ} = 125^\circ\text{C}$	2.5	mA
V_F	$I_F = 10\text{ A}$; $T_{VJ} = 125^\circ\text{C}$	0.66	V
	$I_F = 10\text{ A}$; $T_{VJ} = 25^\circ\text{C}$	0.84	V
	$I_F = 20\text{ A}$; $T_{VJ} = 125^\circ\text{C}$	0.80	V
R_{thJC}		1.7	K/W
R_{thCH}	0.5		K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
Data according to IEC 60747 and per diode unless otherwise specified.

Dimensions see Outlines.pdf



DSS 10-01A
DSS 10-01AS

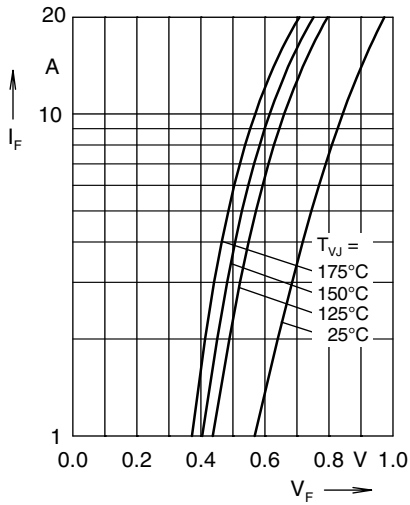


Fig. 1 Maximum forward voltage drop characteristics

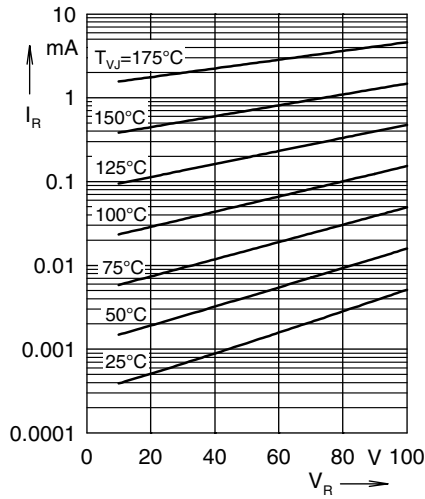


Fig. 2 Typ. reverse current I_R vs: reverse voltage V_R

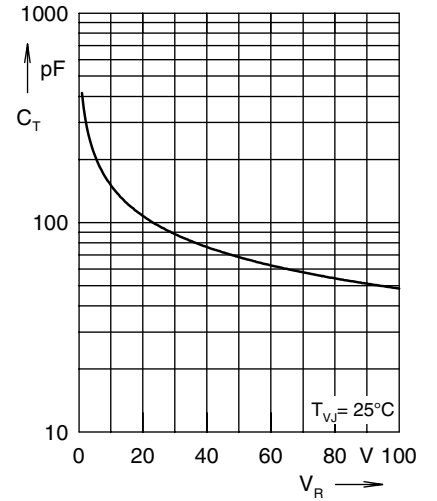


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

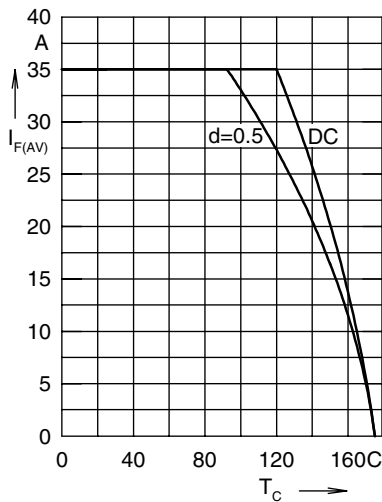


Fig. 4 Avg: forward current $I_{F(AV)}$ vs: case temperature T_C

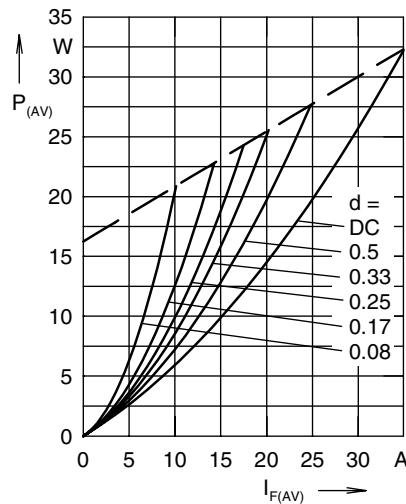


Fig. 5 Forward power loss characteristics

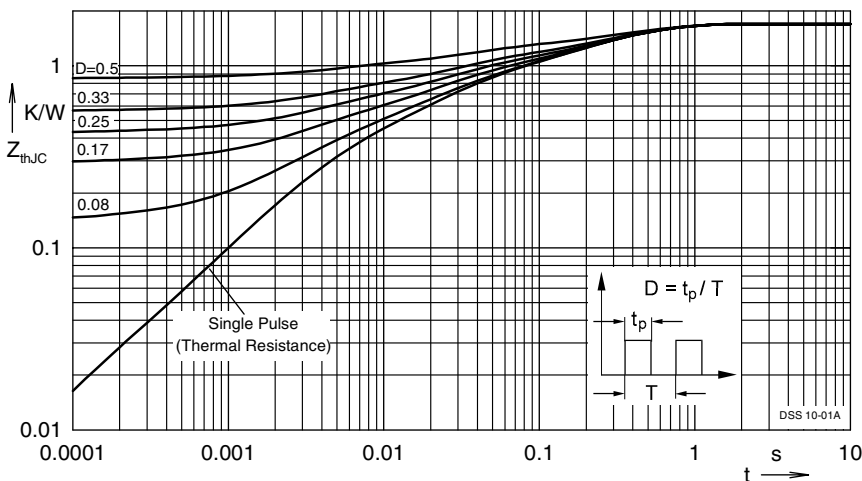


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode