

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[09700142614](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Staf® 14

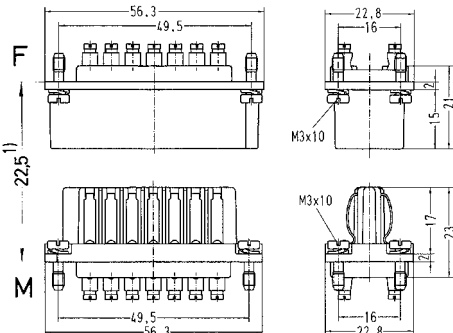

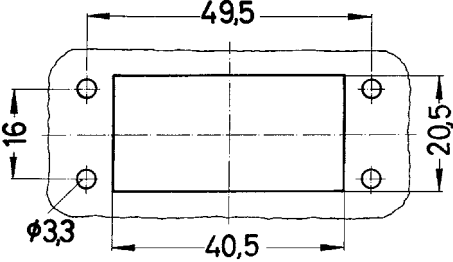
Size 10 A



Number of contacts

14

~ 25 V
- 60 V
10 A

Identification	Wire cross section (mm ²)	Part number	Drawing Dimensions in mm
Staf®, Screw terminal, Male insert (F), silver plated contacts, contact resistance ≤2 mOhm 	1.5	09 70 014 2614	 1) Distance for contact max. 24 mm
Staf®, Screw terminal, Female Insert (M), silver plated contacts, contact resistance ≤2 mOhm 	1.5	09 70 014 2811	 Contact arrangement (view from termination side)
Staf®, Solder terminal, Male insert (F), silver plated contacts, contact resistance ≤2 mOhm 	2.5	09 70 014 2613	 Panel cut out for inserts for use without hoods/housings
Staf®, Solder terminal, Female Insert (M), silver plated contacts, contact resistance ≤2 mOhm 	2.5	09 70 014 2810	