

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[17062202202](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SEK IEC 60603-13




Number of contacts

6-64



Tape & Reel packaging

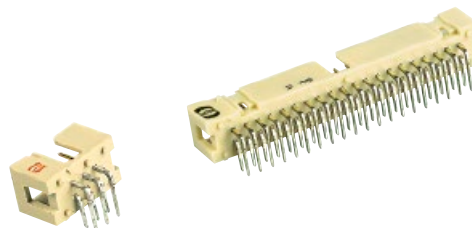

SMC low-profile male header, angled solder pins


Identification No. of contacts Part number Drawing Dimensions in mm

SMC male header with angled solder pins

Length: 2.9 mm
Colour: Beige
Packaging: Carton

6	09 19 506	323
10	09 19 510	323
14	09 19 514	323
16	09 19 516	323
20	09 19 520	323
26	09 19 526	323
30	09 19 530	323
34	09 19 534	323
40	09 19 540	323
50	09 19 550	323
60	09 19 560	323
64	09 19 564	323

No. of contacts	A	B	E
6	15.2	12.78	2.54 x 2 = 5.08
10	20.3	17.86	2.54 x 4 = 10.16
14	25.4	22.94	2.54 x 6 = 15.24
16	27.9	25.48	2.54 x 7 = 17.78
20	33.0	30.56	2.54 x 9 = 22.86
26	40.6	38.18	2.54 x 12 = 30.48
30	45.72	43.26	2.54 x 14 = 35.56
34	50.8	48.34	2.54 x 16 = 40.64
40	58.4	55.96	2.54 x 19 = 48.26
50	71.3	68.66	2.54 x 24 = 60.96
60	84.0	81.36	2.54 x 29 = 73.66
64	89.1	86.44	2.54 x 31 = 78.74



Solder pins for 1 ± 0.1 mm dia. hole

Colour: Beige
Packaging: Tape & Reel

Vacuum plate for pick & place process

6	09 19 506	323 740
10	09 19 510	323 740
14	09 19 514	323 740
16	09 19 516	323 740
20	09 19 520	323 740
26	09 19 526	323 740
30	09 19 530	323 740
34	09 19 534	323 740
40	09 19 540	323 740

Colour: Black
Packaging: Tape & Reel


Vacuum plate for pick & place process

6	09 19 506	323 741
10	09 19 510	323 741
14	09 19 514	323 741
16	09 19 516	323 741
20	09 19 520	323 741
26	09 19 526	323 741
30	09 19 530	323 741
34	09 19 534	323 741
40	09 19 540	323 741


For performance level 3 please specify digit 7
For performance level 2 please specify digit 6
S4 = 0.76 µm (30 µinch) Au or PdNi equivalent




Marking No. 1 contact

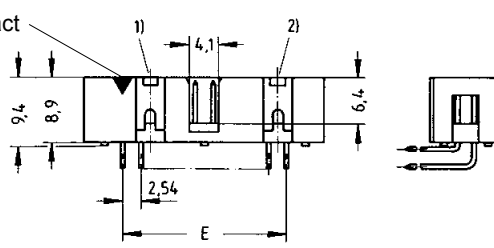

No. 2 contact

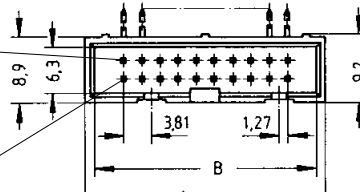

No. 1 contact

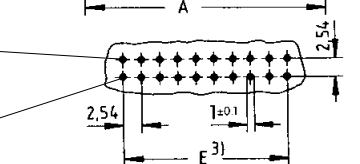

No. 2 contact

No. 1 contact

Identification


Part number

Drawing

Dimensions in mm

Locking lever for female connector with strain relief
in conjunction with low-profile male header

09 18 000 9905⁴⁾

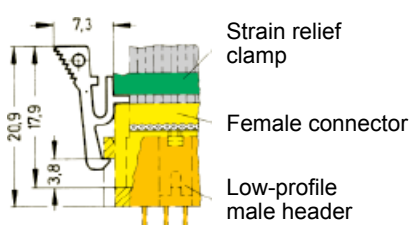

When the security of latching is required and space is a premium, these locking levers can be fitted onto the strain relief of the HARTING female connector.