


## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Harting](#)  
[33272431000002](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

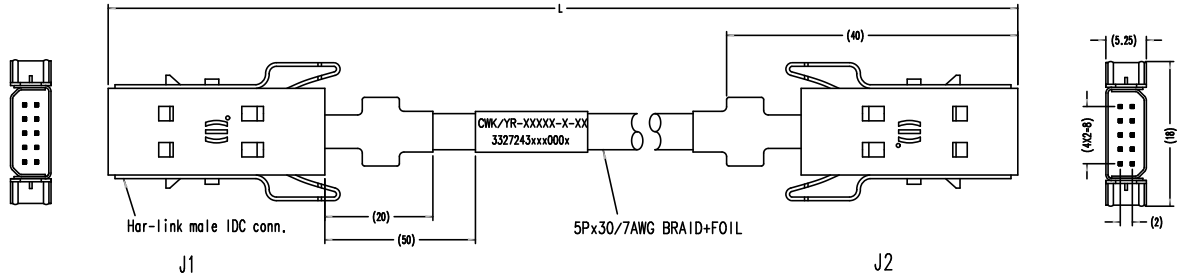

**WIRING INFORMATION**

	J1	Wire color	J2
⊗	2-e	Rose	2-e
⊗	1-e	Orange	1-e
⊗	2-d	Yellow	2-d
⊗	1-d	Rose	1-d
⊗	2-c	Rose	2-c
⊗	1-c	Brown	1-c
⊗	2-b	Black	2-b
⊗	1-b	Rose	1-b
⊗	2-a	Rose	2-a
⊗	1-a	Red	1-a
	Shell	Braid	Shell



**NOTES /**

- 1.) CABLE ASSEMBLY IS MANUFACTURED PER RELEVANT JOB.
- 2.) MECHANICAL REQUIREMENTS
  - OPERATING TEMPERATURE = -20° TO +105°C
  - MATING CYCLES : 250, PERFORMANCE LEVEL 2 ( IEC 60512-5 )
- 3.) THE CONNECTOR COMPLIES REQUIREMENT : IEC 61076-4-107
- 4.) WHITE LABEL INFORMATION:
 

DATE CODE & LOT INFORMATION  
HARTING P/N
- 5.) CABLE MUST BE PERFORMED HI-POT TEST AND CONTINUITY TEST
- 6.) CABLE MUST BE PACKED INTO A PLASTIC BAG.

33 27 243 350 0029	3.5 m
33 27 243 400 0028	4 m
33 27 243 300 0027	3 m
33 27 243 060 0026	0.6 m
33 27 242 100 0021	10 m
33 27 243 800 0020	8 m
33 27 243 650 0019	6.5 m
33 27 243 200 0003	2 m
33 27 243 100 0002	1 m
33 27 243 050 0001	0.5 m
<i>Part-No.</i>	<i>Dim. L</i>

All Dimensions in mm Original Size DIN A 3		Tech. Character.			Free size tolerances	
Mod.	Det.	Initial.	Det.	Name	Scale	Har-link standard cable, male IDC double ended
		Imp.	4.03.09	P.D.	/	
		Stow.				
ZHANHAI HARTING LIMITED					TB 33 27 24x xxx 00xx	
						Page

All rights reserved