

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[33541110010002](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Han® 3 A



Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------

Fibre optic cable, double ended,
multi mode, metal, 50 µm
2 x Han® 3 A, 2 x LC duplex

Length: a = 1 m

a = 5 m

a = 10 m

a = 20 m

a = 40 m

a = 50 m

a = 100 m

33 54 211 0010 002

33 54 211 0050 002

33 54 211 0100 002


33 54 211 0200 002

33 54 211 0400 002


33 54 211 0500 002

33 54 211 1000 002

double ended

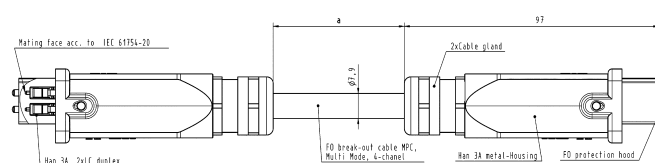

a = length



Fibre optic cable, single ended,
multi mode, metal, 50 µm
1 x Han® 3 A, 2 x LC duplex

Length: a = 1 m

a = 5 m

a = 10 m

a = 20 m

a = 40 m

a = 50 m

a = 100 m

33 54 111 0010 002

33 54 111 0050 002

33 54 111 0100 002

33 54 111 0200 002


33 54 111 0400 002

33 54 111 0500 002

33 54 111 1000 002

Protection level: IP 65 / IP 67

single ended

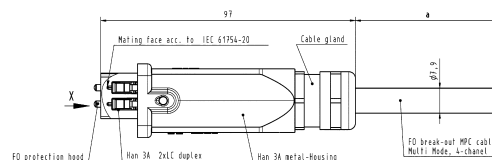

a = length

Fibre optic breakout cable ,
multi mode, 50 µm

Length: 10 m


Length: 20 m

Length: 100 m

33 54 751 0100 002

33 54 751 0200 002

33 54 751 1000 002



FRNC jacket

4-fibre multi mode 50 µm

Outer diameter: 7.9 mm

Min. bending radius:
Installation: 9.8 cm
Operating: 7.9 cm