

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[33581110010004](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

HARTING PushPull



Identification

Part No.

Drawing


Dimensions in mm

Fibre optic cable, double ended, multi mode, 50 µm


- Length: a = 1 m
- a = 5 m
- a = 10 m
- a = 20 m
- a = 40 m
- a = 50 m
- a = 100 m

- 33 58 211 0010 004
- 33 58 211 0050 004
- 33 58 211 0100 004
- 33 58 211 0200 004
- 33 58 211 0400 004
- 33 58 211 0500 004
- 33 58 211 1000 004

double ended

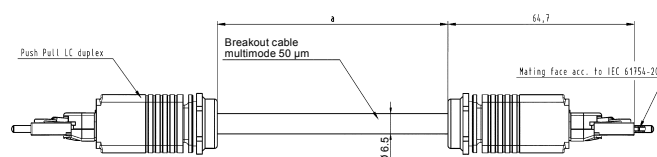

a = length




Fibre optic cable, single ended, multi mode, 50 µm

- Length: a = 1 m
- a = 5 m
- a = 10 m
- a = 20 m
- a = 40 m
- a = 50 m
- a = 100 m

- 33 58 111 0010 004
- 33 58 111 0050 004
- 33 58 111 0100 004
- 33 58 111 0200 004
- 33 58 111 0400 004
- 33 58 111 0500 004
- 33 58 111 1000 004

Protection level: IP 65 / IP 67

single ended

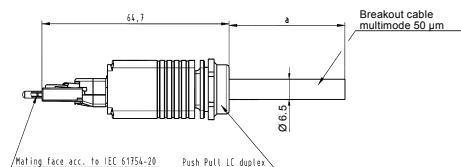

a = length

Fibre optic breakout cable , multi mode, 50 µm

- Length: 10 m
- Length: 20 m
- Length: 100 m

- 33 58 751 0100 003
- 33 58 751 0200 003
- 33 58 751 1000 003



- PUR jacket
- 2-fibre multi mode 50 µm
- Outer diameter: 6.5 mm
- Min. bending radius: 10.4 cm
- Installation: 10.4 cm
- Operating: 5.2 cm