Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Harting
33582110010001

For any questions, you can email us directly:
sales@integrated-circuit.com

HARTING PushPull

Identification	Part No.	Drawing	Dimensions in mm
Fibre optic cable, double ended, multi mode, 62.5 µm		double ended	
Length: a = 1 m	33 58 211 0010 001		
a = 5 m	33 58 211 0050 001		
a = 10 m	33 58 211 0100 001		
a = 20 m	33 58 211 0200 001		
a = 40 m	33 58 211 0400 001		
a = 50 m	33 58 211 0500 001		
a = 100 m	33 58 211 1000 001		
Fibre optic cable, single ended, multi mode, 62.5 µm			
Length: a = 1 m	33 58 111 0010 001		
a = 5 m	33 58 111 0050 001		
a = 10 m	33 58 111 0100 001		
a = 20 m	33 58 111 0200 001		
a = 40 m	33 58 111 0400 001		
a = 50 m	33 58 111 0500 001		
a = 100 m	33 58 111 1000 001		
Fibre optic breakout cable, multi mode, 62.5 µm			
Length: 10 m	33 58 751 0100 001		
Length: 20 m	33 58 751 0200 001		
Length: 100 m	33 58 751 1000 001		

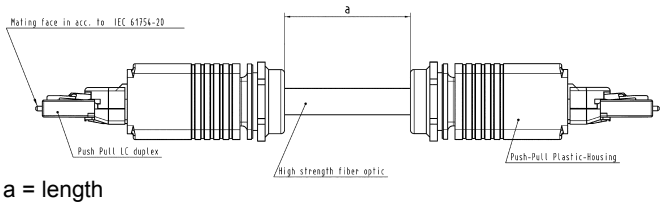

a = length



Protection level: IP 65 / IP 67

single ended

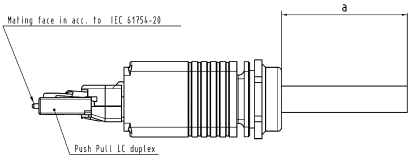

a = length

PUR jacket

2-fibre multi mode	62.5 µm
Outer diameter:	7 mm
Min. bending radius:	
Installation:	10.5 cm
Operating:	7.0 cm

Further cable lengths are available on request