

Excellent Integrated System Limited

Stocking Distributor





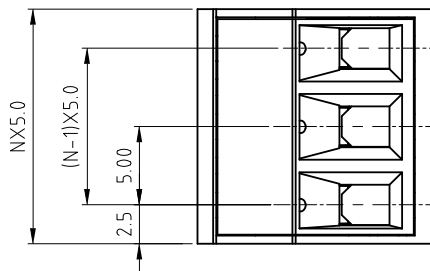
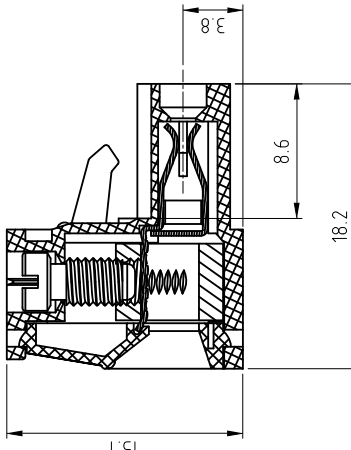
Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)

[A-TB500-TJ08D](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

A	B	C	D	E	F	G	H	7	6																					
<p>Material</p> <ul style="list-style-type: none"> Terminal body (metal housing): Brass (CuZn) Terminal screw: Steel Zinc plating "-" slot type Wire guard: PhBz, Tin plated Insulator (housing): Thermoplastic (UL94V-0) Green <p>Electrical cULus / VDE / TUV</p> <ul style="list-style-type: none"> Voltage rating: 300V / 300V / 300V Current rating: 20A / 20A / 20A Wire range: 2.5mm² / 0.34-2.5mm² Solid wire (AWG): 12-24 Stranded wire (AWG): 12-24 Torque: 5Lb-In / 0.5N.m / 0.56N.m Screw: M3 Wire strip length: 7-8mm Withstanding Voltage: 1.6KV / 2.5KV / 2.5KV Operating temperature: -30°C to +105°C Safety Approval:    							Customer-No.	Name	Date	Date	Name	Date	Date	Name	Date	Date	Name	Date	Date	Name	Date	Date	Name	Date	Date	Name				
   <p>N=Number of contacts</p>							<p>RoHS compliant</p>		<p>ASSMANN WSW-No. A-TB500-TJxxD</p>		<p>ASSMANN WSW-No. A-TB500-TJxxD</p>		<p>ASSMANN WSW-No. A-TB500-TJxxD</p>		<p>ASSMANN WSW-No. A-TB500-TJxxD</p>		<p>ASSMANN WSW-No. A-TB500-TJxxD</p>		<p>ASSMANN WSW-No. A-TB500-TJxxD</p>		<p>ASSMANN WSW-No. A-TB500-TJxxD</p>		<p>ASSMANN WSW-No. A-TB500-TJxxD</p>	<p>ASSMANN WSW-No. A-TB500-TJxxD</p>	<p>ASSMANN WSW-No. A-TB500-TJxxD</p>	<p>ASSMANN WSW-No. A-TB500-TJxxD</p>	<p>ASSMANN WSW-No. A-TB500-TJxxD</p>	<p>ASSMANN WSW-No. A-TB500-TJxxD</p>	<p>ASSMANN WSW-No. A-TB500-TJxxD</p>	<p>ASSMANN WSW-No. A-TB500-TJxxD</p>
A	B	C	D	E	F	G	H	7	6	5	4	3	2	1																