Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

ASSMANN WSW Components
A-TB762-VJ02V

For any questions, you can email us directly:
sales@integrated-circuit.com



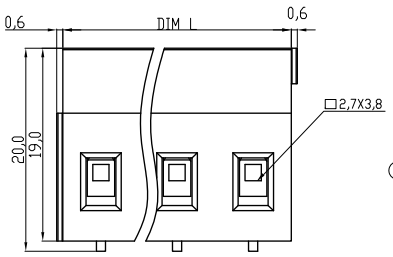



Material

①Terminal housing: Thermoplastic (UL94V-0) , GREEN
②Clamp:Brass,Ni plated
③Wire guard solder pin:Copper,Tin plated
④Terminal screw: Steel Zinc plating "-" slot type

Electrical cULus
Voltage rating: 300VAC
Current rating: 20A
Wire range:
Solid wire(AWG): 12-30
Stranded wire(AWG): 12-30
Torque(Lb-In): 3.5
Screw: M3
Wire strip length: 6-7mm
Withstanding Voltage: 1.6KV
Operating temperature: -40°C to +115°C
Soldering temperature: 250°C±10°C/5 Sec
Safety Approval:
c us



RECOMMENDER PCB LAYOUT

RoHS compliant

DIMENSION

L	Nx7.62
P	(N-1)x7.62

N=Number of poles

Poles	Tolerance
	DIM L&DIM P
2p-6p	±0.15
7p-12p	±0.25
13p-16p	±0.35

Scale	1:1				
TOLERANCE					
X.	±0.50				
X.X	±0.30				
X.XX	±0.10				
DIM	TOL				
X.°	±1°				
		⓪	Drawn	19.04.2010	Alex
Angle	TOL	Id.	Modification	Date	Name

	Date	Name
Drawn	19.04.2010	Alex
Approved	19.04.2010	Hellwig

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-TB762-VJxxV

Drawing-No.
ASS 4113 CO

rev00

Replace

Sheet