

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[07111000026](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

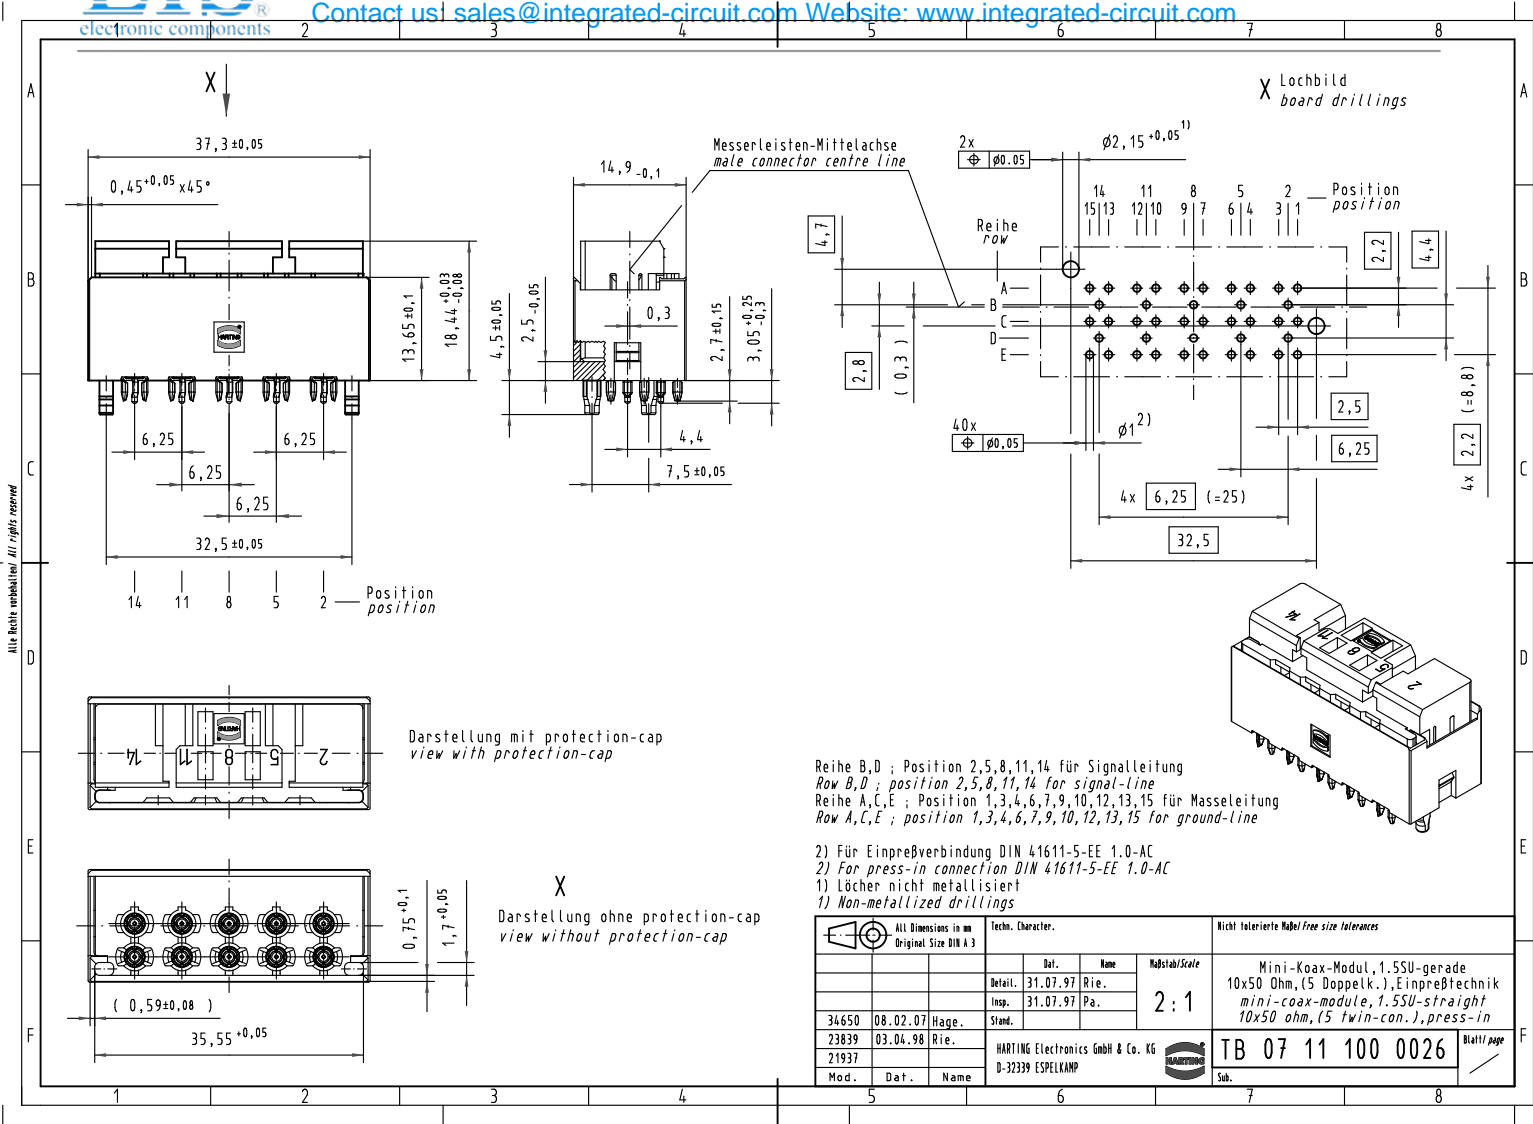

Alle Rechte vorbehalten. All rights reserved.

Darstellung mit protection-cap
view with protection-cap

X
Darstellung ohne protection-cap
view without protection-cap

Reihe B,D ; Position 2,5,8,11,14 für Signalleitung
 Row B,D ; position 2,5,8,11,14 for signal-line
 Reihe A,C,E ; Position 1,3,4,6,7,9,10,12,13,15 für Masseleitung
 Row A,C,E ; position 1,3,4,6,7,9,10,12,13,15 for ground-line

2) Für Einpreßverbindung DIN 41611-5-EE 1.0-AC
 2) For press-in connection DIN 41611-5-EE 1.0-AC
 1) Löcher nicht metallisiert
 1) Non-metallized drillings

All Dimensions in mm Original Size DIN A 3			Techn. Character.		Nicht tolerierte Maß/Free size tolerances	
Mod.	Dat.	Name	Bel.	Name	Maßstab/Scale	Sub.
34650	08.02.07	Hage.	Detail:	31.07.97	Rie.	2:1
23839	03.04.98	Rie.	Insp.	31.07.97	Pa.	
21937			Stand.			
HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP						
					TB 07 11 100 0026	
					Mini-Koax-Modul, 1.55U-gerade 10x50 Ohm, (5 Doppelk.), Einpreßtechnik mini-coax-module, 1.55U-straight 10x50 ohm, (5 twin-con.), press-in	
					Blatt/page	