

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)


[09060322903](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)





Alle Rechte vorbehalten. All rights reserved.

**X**  
Kontaktanordnung  
contact arrangement



32 WW-Kontakte  
32 WW-contacts

- ☒ = Kontaktposition belegt  
= position with contact
- ☐ = Kontaktposition nicht belegt  
= position without contact

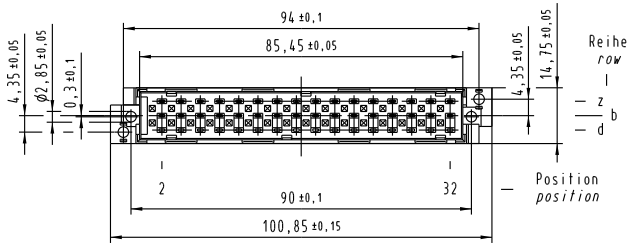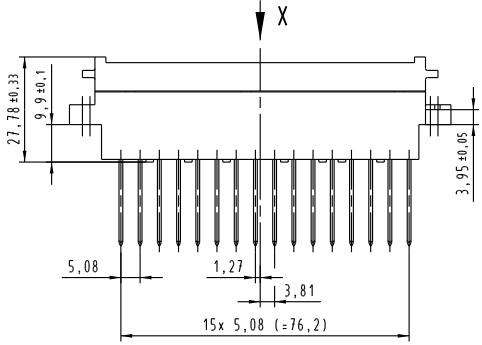

Zylinderschraube M2,5x22 wird lose mitgeliefert  
cheese-head screw M2,5x22 is supplied

-	-	-
09 06 032 2903	1	Au über/over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc.to IEC	Kontaktoberfläche contact plating

All Dimensions in mm Original Size DIN A 3		Techn. Character. IEC 60603-2	Nicht tolerierte Maß/ free size tolerances IEC 60603-2
Defalt. 04.05.06	Name Leh. Ge.	Maßstab/Scale 1:1	Bauform F, Übergangselement I WW, 32 pol. type F, interface connector I WW, 32 pol.
Mod. 33509	Dat. 	Name HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP	TB 09 06 032 x903 Sub.

Blatt/ page