

Excellent Integrated System Limited







Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[09062486838](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Alle Rechte vorbehalten. All rights reserved

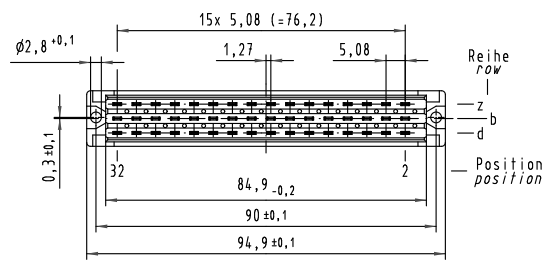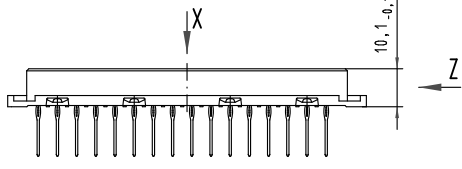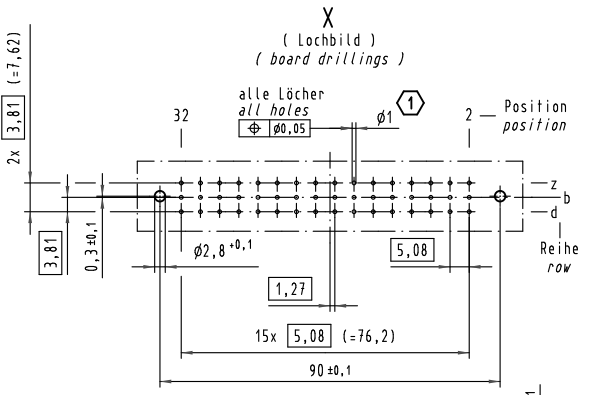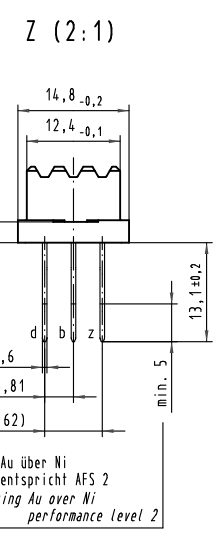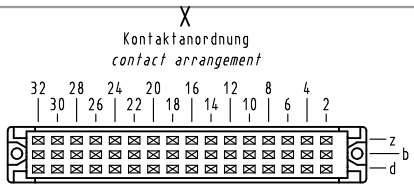

Empfohlener Lochaufbau und weitere Informationen siehe: DS 09 06 210 0002
recommended configuration of plated through holes and further information see: DS 09 06 210 0002

All Dimensions in mm Original Size DIN A 3		Techn. Character.		Nicht tolerierte Maß/ free size tolerances	
		Bel.	Name	IEC 60603-2	
		Detail.	17.03.03 Hage.	Bauform F low-profile Federleiste Einpreß needle eye 13,1 48 pol. Anschluß vergoldet normergänzend zu / complementary to IEC 60603-2 type F low-profile female connector press-in needle eye 13,1 48 pol. termination gold-plated	
		Insp.	17.03.03 kFoe	1:1	
36029	19.04.10 Hage.	Stand.		TB 09 06 248 x838	
31467	10.07.03 Hage.	HARTING Electronics GmbH & Co. KG		Blatt/ page	
31030		D-32339 ESPELKAMP		Sub.	
Mod.	Dat.	Name			

09 06 248 7838	3
09 06 248 6838	2
09 06 248 2838	1
Bestell-Nr. part-no.	Anforderungsstufe performance level