

## Excellent Integrated System Limited

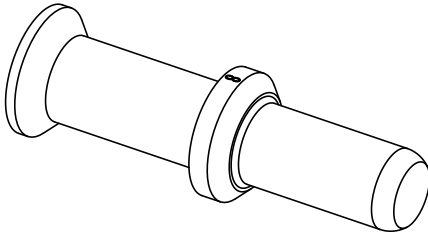
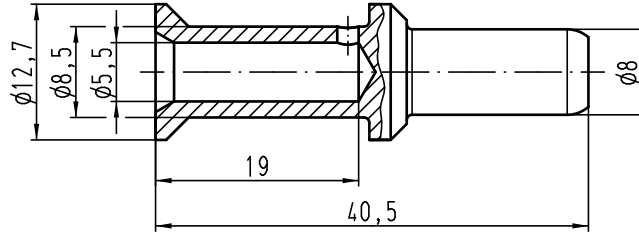
Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)  
[09110006116](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Alle Rechte vorbehalten/ All rights reserved



Für Litzenleiter feindrähtig nach VDE 0295 Klasse5 / IEC 60228 Klasse5  
For stranded fine wire acc.to VDE 0295 class5 / IEC 60228 class5

Leiterquerschnitt / wire gauge: 16 mm<sup>2</sup>

Abisolierlänge / stripping length: 19mm

 All Dimensions in mm Original Size DIN A 4			Techn. Character.			Nicht tolerierte Maße/Free size tolerances		
						Maßstab/Scale <b>2:1</b>	<b>Han TC100 Stiftkontakt</b> <i>Han TC100 male contact</i> versilbert / silver plated	
			Detail.	20.09.11	Ho			
			Insp.		Be			
			Stand.					
B	27.03.12	gru	HARTING Electric GmbH & Co. KG				<b>TB 09 11 000 6116</b>	
A			D-32339 Espelkamp					
Mod.	Dat.	Name				Sub.	Blatt/ page	