

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[09180067001](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Alle Rechte vorbehalten/ All rights reserved

5

4

3

2


1

D

C

B

A

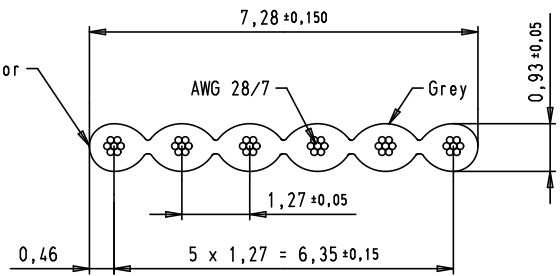

Wire _____ Tinned copper
 Gauge _____ AWG 28/7 0,089 mm²
 Voltage rating _____ 300 Vr.m.s
 Current rating _____ 2,1A at 25°C
 Capacity unbalanced _____ 45,9 pF/m at 1 MHz
 Impedance unbalanced _____ 105 Ω
 Propagation delay _____ 4,9 ns/m nominal
 Insulation material _____ PVC
 Temperature rating _____ -20°C (operating) to +105°C
 _____ -30°C (static)
 Flammability rating _____ Flame retardant VW1
 Insulation resistance _____ 100 MΩ/km
 Approval _____ UL AWM style 2651

				Det.	Name		SEK 18 flat cable 6 poles	Majstah/ Scale
			Detail.	20/10/05	JMDR			All Dim. in mm Orig. Size DIN A 4
EC01360	19/02/10	SC	Insp.				TB 09 18 006 700X	Blatt/ Page 1 / 1
34400	17/09/07	PK	Stand.					
33246	20/10/05	JMDR						
			Mod.	Det.	Name			
			HARTING EURL F-95972 Paris					

09 18 006 7004	100 m (328 feet)
09 18 006 7001	30,48 m (100 feet)
Part number	Length per reel