

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[09180107005](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Alle Rechte vorbehalten/ All rights reserved

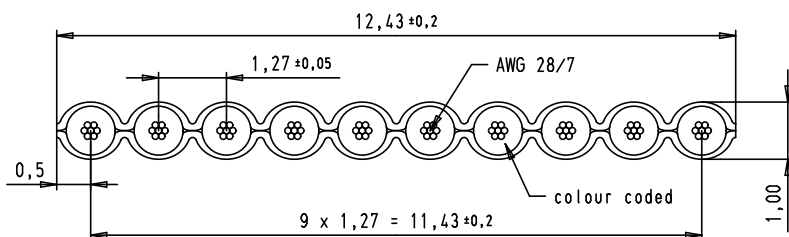

5 4 3 2 1



Wire	Cu tinned
Gauge	AWG 28/7
Voltage rating	300 Vr.m.s
Current (Max)	2,1A
Conductor resistance	221 mΩ/m
Capacity unbalanced	42,7 pF/m
Impedance unbalanced	105 Ω
Inductance unbalanced	0,68 μH/m
Signal delay	4,9 ns/m
Insulation material	PVC
Temperature rating	-20°C (operating) to 105°C -30°C (static)
Flammability rating	UL: VW1
Insulation resistance	100 MΩ/km
Approval	UL AWM style 2651

Colour code sequence (in 10 steps):

- brown
- red
- orange
- yellow
- green
- blue
- violet
- grey
- white
- black

			Det.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 Flat cable	Meßstab/ Scale	
			Detail.	20/10/05		JMDR	10 poles, length per reel: 30,48 m colour coded, UL 20130, IEC 918	10:1
			Insp.					
EC01446	22/02/10	SC	Stand.			 TB 09 18 010 7005	Blatt/ Page 1/1	
33990	14/05/07	PK						
33246	20/10/05	JMDR						
Mod.	Det.	Name	HARTING EURL F-95972 Paris			Sub.		