

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[09180147005](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

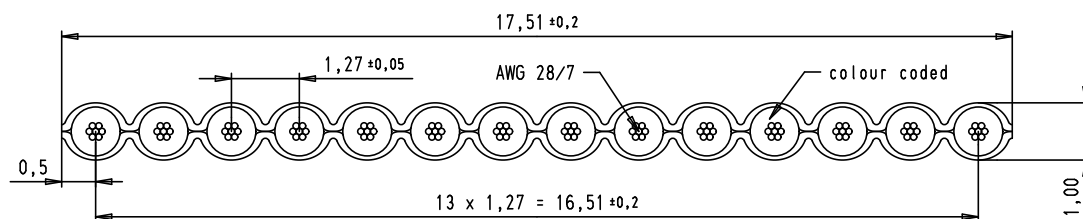

Wire ————— Cu tinned

Gauge ————— AWG 28/7

Voltage rating ————— 300 Vr.m.s

Current (Max) ————— 2,1A

Conductor resistance ————— 221 mΩ/m

Capacity unbalanced ————— 42,7 pF/m

Impedance unbalanced ————— 105 Ω

Inductance unbalanced ————— 0,68 μH/m

Signal delay ————— 4,9 ns/m

Insulation material ————— PVC

Temperature rating ————— -20°C (operating) to 105°C
-30°C (static)

Flammability rating ————— UL: VW1

Insulation resistance ————— 100 MΩ/km

Approval ————— UL AWM style 2651

Colour code sequence (in 10 steps):

-brown
-red
-orange
-yellow
-green
-blue
-violet
-grey
-white
-black

			Det.	Name		SEK 18 Flat cable	Maßstab/ Scale
			Detail.	20/10/05	JMDR	14 poles, length per reel: 30,48 m colour coded, UL 20130, IEC 918	10:1
			Insp.			All Dim. in mm Orig. Size DIN A 4	
EC01446	22/02/10	SC	Stand.				
33990	14/05/07	PK					
33246	20/10/05	JMDR					
Mod.	Det.	Name					
				HARTING EURL F-95972 Paris		TB 09 18 014 7005	Blatt/ Page 1/1
						Sub.	