

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)  
[09180167005](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Alle Rechte vorbehalten/ All rights reserved

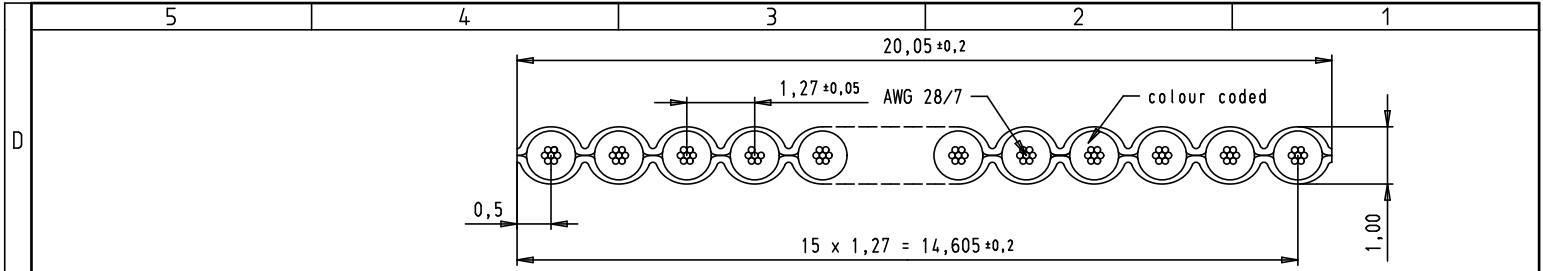

<p>Wire _____ Cu tinned</p> <p>Gauge _____ AWG 28/7</p> <p>Voltage rating _____ 300 Vr.m.s</p> <p>Current (Max) _____ 2,1A</p> <p>Conductor resistance _____ 221 mΩ/m</p> <p>Capacity unbalanced _____ 42,7 pF/m</p> <p>Impedance unbalanced _____ 105 Ω</p> <p>Inductance unbalanced _____ 0,68 μH/m</p> <p>Signal delay _____ 4,9 ns/m</p> <p>Insulation material _____ PVC</p> <p>Temperature rating _____ -20°C (operating) to 105°C</p> <p>_____ -30°C (static)</p> <p>Flammability rating _____ UL: VW1</p> <p>Insulation resistance _____ 100 MΩ/km</p> <p>Approval _____ UL AWM style 2651</p>	<p>Colour code sequence (in 10 steps):</p> <ul style="list-style-type: none"> <li>-brown</li> <li>-red</li> <li>-orange</li> <li>-yellow</li> <li>-green</li> <li>-blue</li> <li>-violet</li> <li>-grey</li> <li>-white</li> <li>-black</li> </ul>
--	--

A				Det.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 Flat cable 16 poles, length per reel: 30,48 m colour coded, UL 20130, IEC 918	Maßstab/ Scale 10:1	
				Detail.	20/10/05				JMDR
				Insp.					
		EC01446	22/02/10	SC	Stand.				
				HARTING EURL F-95972 Paris				TB 09 18 016 7005	Blatt/ Page 1 / 1
	33990	14/05/07	PK						
				Mod.	Det.	Name	Sub.		