

Excellent Integrated System Limited

Stocking Distributor

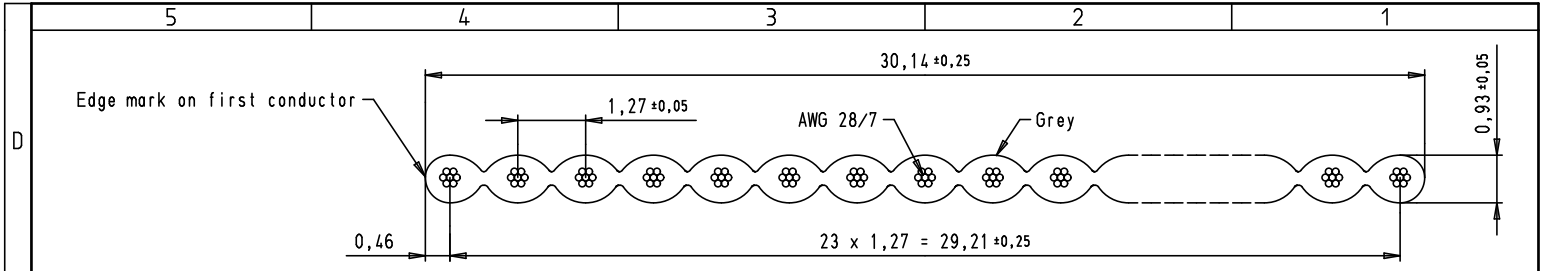
Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[09180247001](#)



For any questions, you can email us directly:

sales@integrated-circuit.com



D	Wire _____	Tinned copper
C	Gauge _____	AWG 28/7 0,089 mm ²
	Voltage rating _____	300 Vr.m.s
	Current rating _____	2,1A at 25°C
	Capacity unbalanced _____	45,9 pF/m at 1 MHz
	Impedance unbalanced _____	105 Ω
B	Propagation delay _____	4,9 ns/m nominal
	Insulation material _____	PVC
	Temperature rating _____	-20°C (operating) -30°C (static) to +105°C
	Flammability rating _____	Flame retardant VW1
	Insulation resistance _____	100 MΩ/km
A	Approval _____	UL AWM style 2651

09 18 024 7004	100 m (328 feet)
09 18 024 7001	30,48 m (100 feet)
Part number	Length per reel

				Det.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 flat cable 24 poles	Maßstab/ Scale 10:1
			Detail.	20/10/05	JMDR			
EC01360	19/02/10	SC	Insp.					
34400	17/09/07	PK	Stand.				TB 09 18 024 700X	Blatt/ Page 1 / 1
33246	20/10/05	JMDR						
					HARTING EURL F-95972 Paris	Sub.		