

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Harting](#)  
[09180347006](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

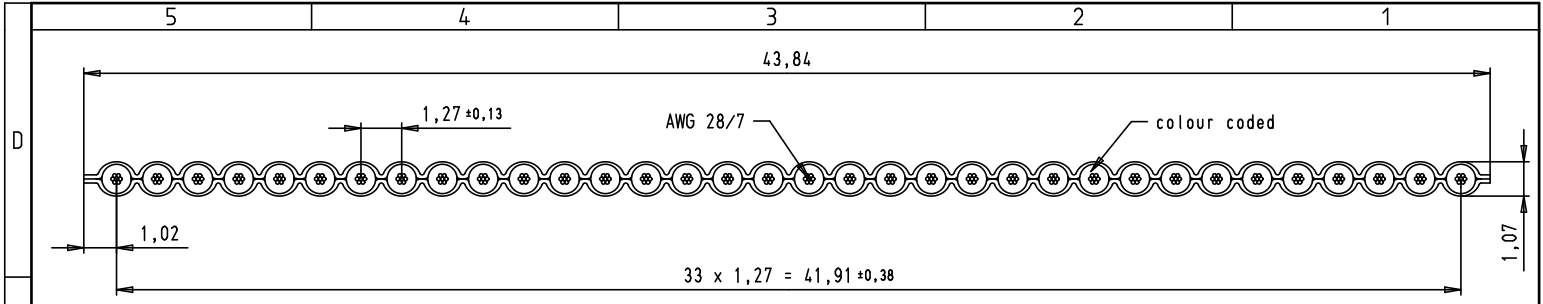

Alle Rechte vorbehalten/ All rights reserved

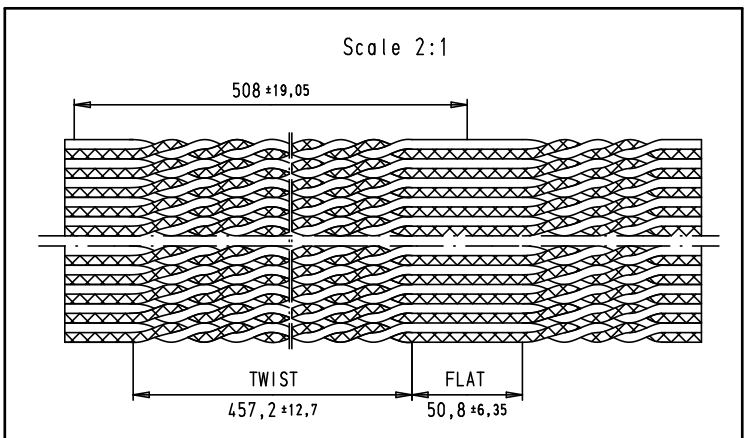

- Wire \_\_\_\_\_ Cu tinned
- Gauge \_\_\_\_\_ AWG 28/7
- Voltage rating \_\_\_\_\_ 300 Vr.m.s
- Conductor resistance \_\_\_\_\_ 221 mΩ/m
- Capacity unbalanced \_\_\_\_\_ 49 pF/m
- Impedance unbalanced \_\_\_\_\_ 105 Ω
- Signal delay \_\_\_\_\_ 5,2 ns/m
- Insulation material \_\_\_\_\_ PVC
- Temperature rating \_\_\_\_\_ -20°C to +105°C
- Flammability rating \_\_\_\_\_ UL: VW1
- Insulation resistance \_\_\_\_\_ 1000 MΩ/km



Colour code sequence (in 10 steps):  
brown, red, orange, yellow, green,  
blue, violet, grey, white, black

			Det.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 Flat cable 34 poles, twisted pair, length per reel: 30,48 m colour coded, UL 20130, IEC 918	Meßstab/ Scale
		Detail.	25/10/05	JMDR			6:1
		Insp.					
		Stand.					Blatt/ Page
33990	15/05/07	PK	HARTING EURL F-95972 Paris			 TB 09 18 034 7006	1/1
33247	25/10/05	JMDR					
Mod.	Det.	Name	Sub.				