

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[09180407005](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Alle Rechte vorbehalten/ All rights reserved

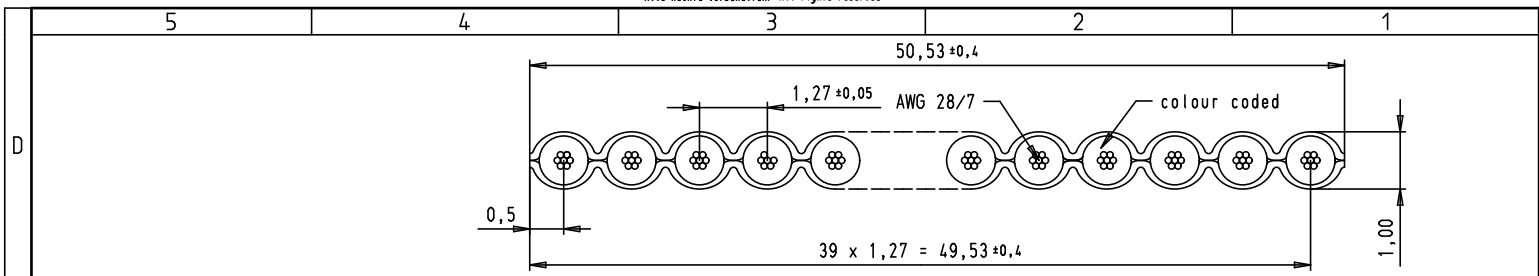

D	<p>Wire _____ Cu tinned</p> <p>Gauge _____ AWG 28/7</p> <p>Voltage rating _____ 300 Vr.m.s</p> <p>Current (Max) _____ 2,1A</p> <p>Conductor resistance _____ 221 mΩ/m</p> <p>Capacity unbalanced _____ 42,7 pF/m</p> <p>Impedance unbalanced _____ 105 Ω</p> <p>Inductance unbalanced _____ 0,68 μH/m</p> <p>Signal delay _____ 4,9 ns/m</p> <p>Insulation material _____ PVC</p> <p>Temperature rating _____ -20°C (operating) to 105°C -30°C (static)</p> <p>Flammability rating _____ UL: VW1</p> <p>Insulation resistance _____ 100 MΩ/km</p> <p>Approval _____ UL AWM style 2651</p>	<p>Colour code sequence (in 10 steps):</p> <ul style="list-style-type: none"> -brown -red -orange -yellow -green -blue -violet -grey -white -black
C		
B		
A		

			Det.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 Flat cable			Meßstab/ Scale
			Detail.	JMDR		40 poles, length per reel: 30,48 m colour coded, UL 20130, IEC 918			10:1
			Insp.		 HARTING	TB 09 18 040 7005			Blatt/ Page
			Stand.			HARTING EURL F-95972 Paris			1/1
			Mod.			Sub.			