

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Harting](#)
[09553566620741](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

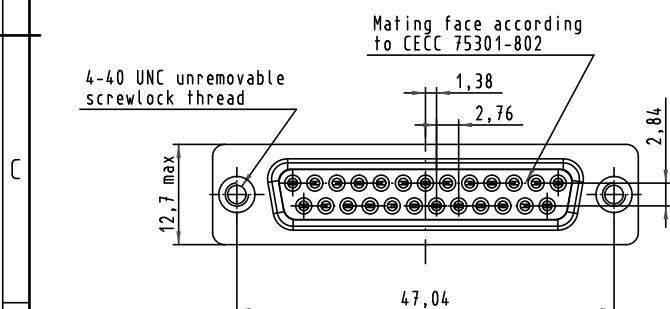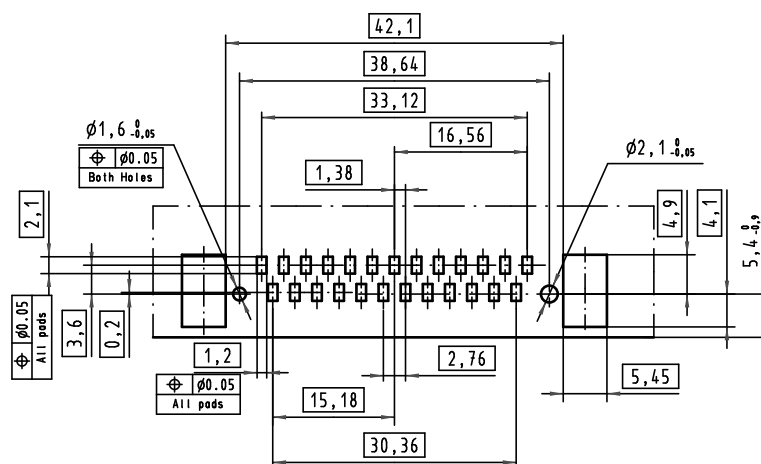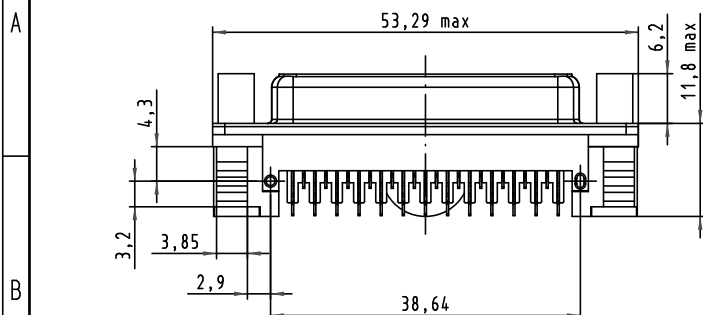


PCB Layout, component side (thickness 1,6mm min.)

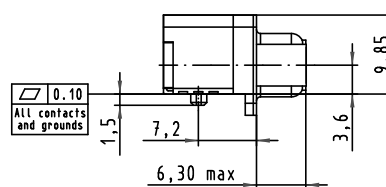

Max. Temperature: 260°C during 10 seconds

				Dot.	Name		D-SUB SMT Low Profile Female 25p with die casted grounds and 4-40 UNC unremovable screwlocks	Majstob/ Scale 1,5:1	
			Detail.	30Jun2010	ED				
			Insp.						All Dim. in mm Orig. Size DIN A 4
			Stand.						
				HARTING EURL F-95972 Paris				TB 09 55 356 x620	Blatt/ Page 1 / 2
ECO1953	30Jun2010	ED							
Mod.	Dot.	Name				Sub.			

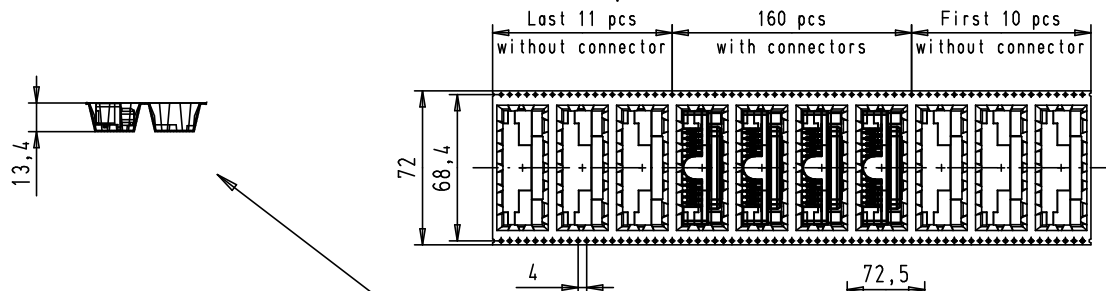

See TB 09 55 356 x620 folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2-A

09553563620.741	1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors)
09553566620.741	2			
09553567620.741	3			
Part number	PL	Thread	Index designation	

			Det.	Name
			Detail.	30Jun2010
			Insp.	ED
			Stand.	
EC01953	30Jun2010	ED	HARTING EURL	
Mod.	Det.	Name	F-95972 Paris	



D-SUB SMT Low Profile Female 25p with die casted grounds and 4-40UNC unremovable screwlocks	
TB 09 55 356 x620	
Sub.	