# **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


Easy Braid Co. ES60DS045

For any questions, you can email us directly: <a href="mailto:sales@integrated-circuit.com">sales@integrated-circuit.com</a>



## ES60DS045 Datasheet

### **Technical Specifications**

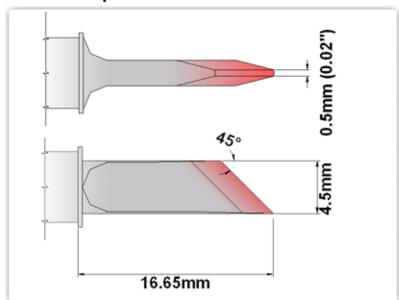

#### ES60DS045

Knife 4.50mm (0.177")

Tip Style: Knife

Tip Width: 4.50mm (0.18")
Tip Length: 16.65mm (0.66")


60 Type Cartridge<sup>1</sup>: 325°C - 358°C

RoHS Compliant<sup>2</sup> / Lead Free: YES

Equivalent to: SSC-661A

For Use With: EB-2000S, SP200, MFR-PS1100, MFR-PS2200 (SSC Tips)

#### **Material Composition**

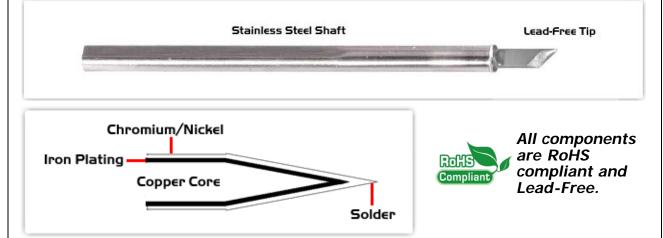

Easy Braid Co. tip cartridges will typically idle within a temperature range of +/-1.1°C. However, there is variation in idle temperature across tip geometries within an individual temperature series. Easy Braid Co. offers a wide variety of tip geometries from 0.25mm fine point tip to 5mm chisel. The length and geometry of a tip will have an influence on the tip idle temperature. To accurately measure idle temperature it will depend greatly on the measurement method,

technique and equipment used. Two different methods or the use of alternative equipment will produce different test results.

Copyright  $\ @$  2010-2012 Easy Braid Co. All Rights Reserved

<sup>&</sup>lt;sup>2</sup> Please refer to <a href="http://www.rohs.gov.uk">http://www.rohs.gov.uk</a> for details on RoHS Compliance.