

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panasonic Electronic Components](#)
[LNJ812K87RA](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Approved <i>M. Yamaguchi</i>	Checked <i>T. Akeda</i>	Designed <i>K. Shibasaki</i>	DEVELOPMENT SPECIFICATION			18	4
			P/N: LNJ812K87RA				

T Y P E	Soft-Orange Light Emitting Diode					
APPLICATION	Indicators					
MATERIAL	InGaAlP					
OUTLINE	Attached					
ABSOLUTE MAXIMUM RATINGS	P 55 mW	※I _{FP} 60 mA	I _{FDC} 20 mA	V _R 4 V	Topr -30~+85 °C	Tstg -40~+100 °C
CONDITION	Ta=25±3 °C					

Test Specification

Item	Symbol	Condition	Typ	Limit		Unit
				Min	Max	
Forward Voltage	V _F	I _F = 10 mA	1.95		2.5	V
Reverse Leakage Current	I _R	V _R = 4 V			100	μA
Luminous Intensity	I _o	I _F = 10 mA·DC	21	7		mcđ
Peak Emission Wavelength	λ _P	I _F = 10 mA·DC	615			nm
Spectral Line Half Width	Δλ	I _F = 10 mA·DC	20			nm

※ · The Condition of I_{FP} is duty 10 % , Pulse width 1 ms
 · Please contact the Panasonic local office if you design at low current (below 1 mA DC) or pulse current operation and have any questions.

NOTE

- ★1 Terminal:Plated with gold on copper base.
- ★2 Package:Light yellow diffusion type.
- ★3 Soldering conditions.
Refer to Handling note.
- ★4 Care should be taken that soldering is done within 3-days after opening the dry package and reel.





Sep. 10. 1998			
---------------	--	--	--

Approved/Checked/Designed
M. Yamaguchi / *T. Ikeda* / *K. Ishida*

DEVELOPMENT SPECIFICATION

P/N: LNJ812K87RA

18		5
----	--	---

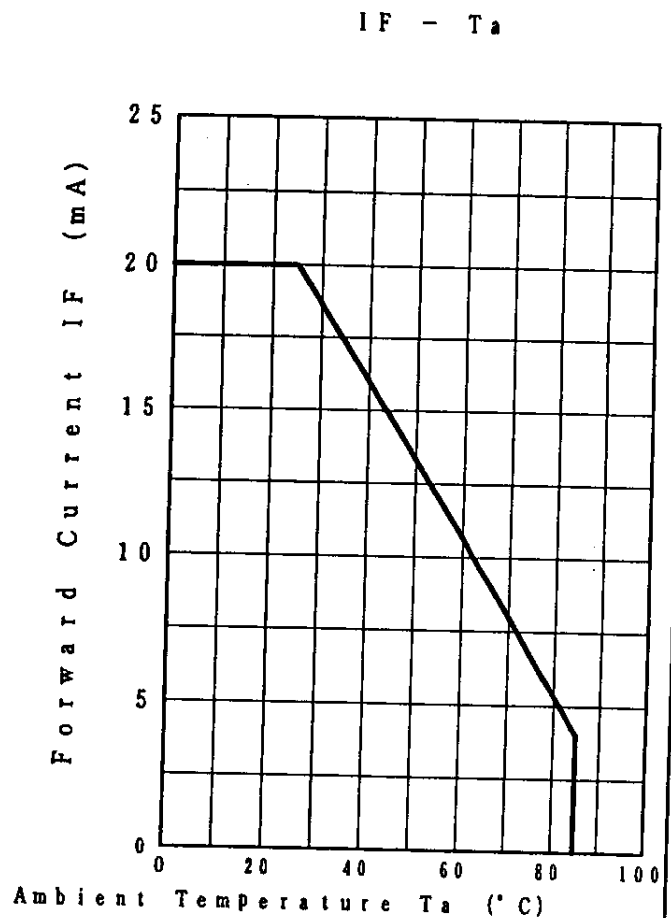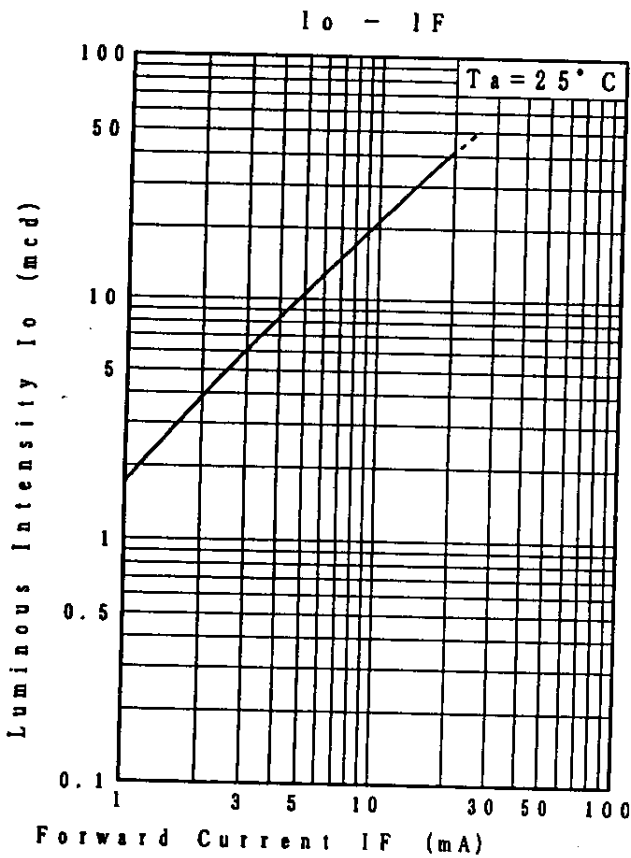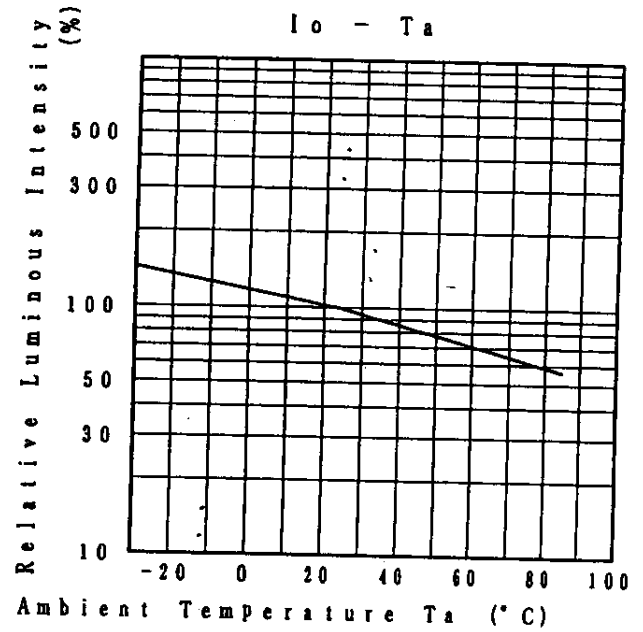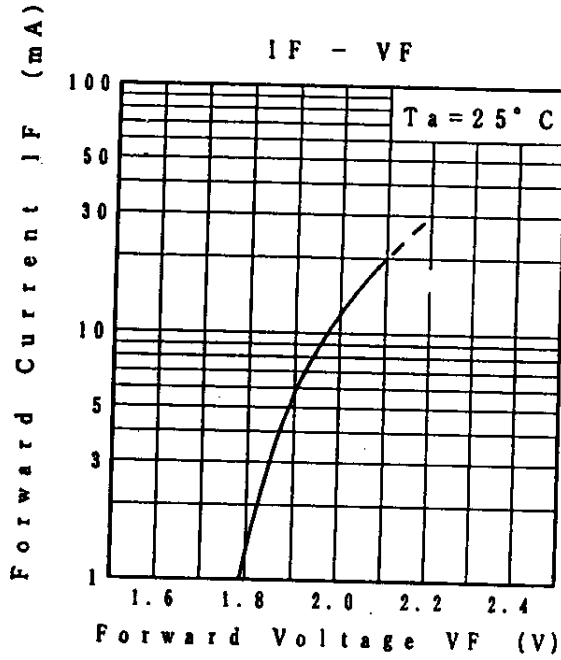

Sep. 10. 1998			

Approved <i>M. Yamaguchi</i>	Checked <i>T. Akeda</i>	Designed <i>K. Adachi</i>
---------------------------------	----------------------------	------------------------------


DEVELOPMENT SPECIFICATION

P/N: LNJ812K87RA


18

6

Relative Luminous Intensity
Wavelength Characteristics

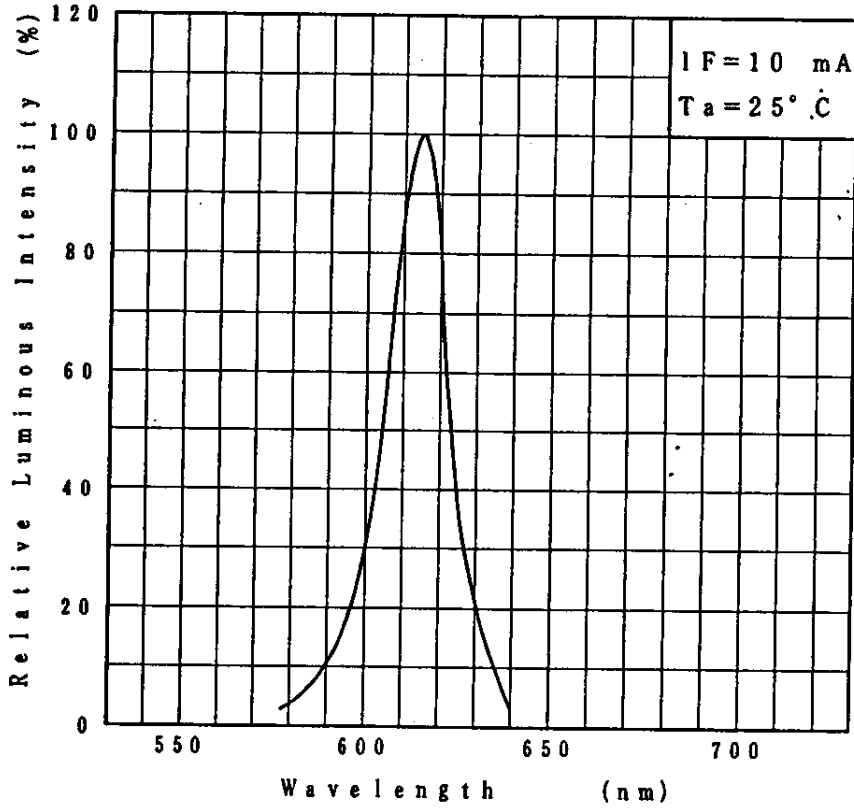

Directive Characteristics

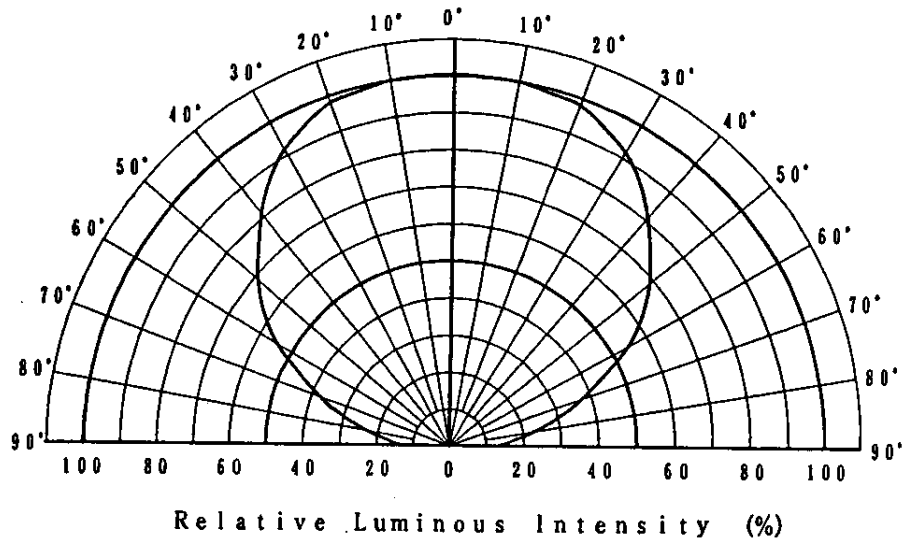


Sep. 10. 1998


Approved <i>[Signature]</i>	Checked <i>[Signature]</i>	Designed <i>[Signature]</i>
--------------------------------	-------------------------------	--------------------------------

DEVELOPMENT SPECIFICATION
 (O U T L I N E)
 P/N: LNJ812K87RA

18	7
----	---

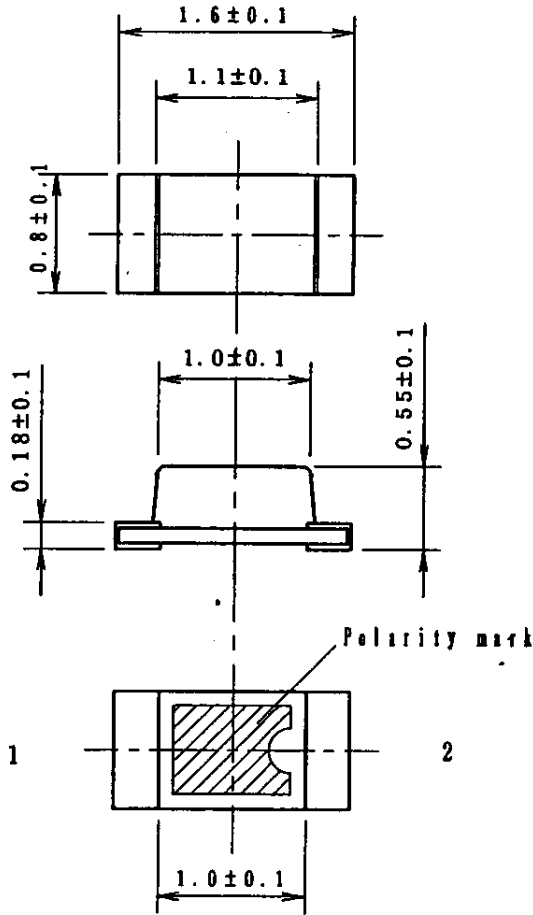

Recommended Land Layout

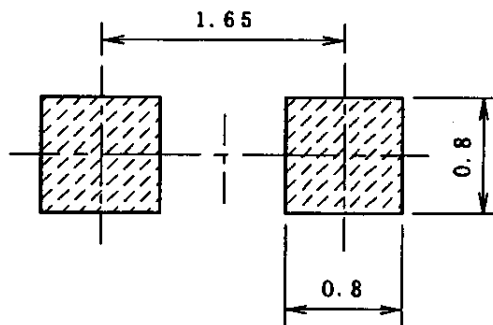

Polarity



1: Anode
 2: Cathode

(NOTE)

1. Measurement of the package doesn't include electrode projection.
2. Unit: mm

Sep. 10. 1998		
---------------	--	--