

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[Panasonic Electronic Components](#)
[LNJ310C63RA](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Approved	Checked	Designed	DEVELOPMENT SPECIFICATION						
<i>T. Akada</i>	<i>M. H. J.</i>	<i>K. Sakibuchi</i>	P/N: LNJ310C63RA				18	4	
T Y P E			Green Light Emitting Diode						
APPLICATION			Indicators						
MATERIAL			InGaAlP						
OUTLINE			Attached						
ABSOLUTE MAXIMUM RATINGS			P	※ I _{FP}	I _{FDC}	V _R	Topr	Tstg	
			50	60	20	4	-25~+80	-30~+85	
			mW	mA	mA	V	°C	°C	
CONDITION			T _a = 25 ± 3°C						
Test Specification									
Item	Symbol	Condition	Typ	Limit		Unit			
				Min	Max				
Forward Voltage	V _F	I _F = 10 mA	2.0		2.5	V			
Reverse Leakage Current	I _R	V _R = 4 V			100	μA			
Luminous Intensity	I _O	I _F = 10 mA · DC	15	7.7		mcd			
Peak Emission Wavelength	λ _p	I _F = 10 mA · DC	575			nm			
Spectral Line Half Width	Δλ	I _F = 10 mA · DC	15			nm			
<p>*1. The Condition of pulse current I_{FP} is 1 ms pulse width, 10 % duty cycle.</p> <p>*2. Tolerance of luminous intensity ±20 %.</p> <p>· Please contact the Panasonic local office if you design at low current (below 1 mA DC) or pulse current operation and have any questions.</p>									
NOTE									
★1. Soldering conditions. Refer to Handling note.									
★2. Care should be taken that soldering is done within 3-days after opening the dry package and reel.									
★3. This LED is sensitive to static electricity and care should be fully taken in handling it. Particularly, when an overvoltage is applied, which exceeds the absolute maximum rating of the LED, its energy damages the LED. Therefore, take utmost proactive measures against static electricity and surge as to building an assembly line and handling the LED halfway the process.									
(1) Check the entire drive circuit including the power source. For example, a surge current, etc., generated at power-on/off must not exceed the absolute maximum rating of the LED. Also, insert an appropriate protective circuit into the LED drive circuit.									
(2) Beware of destruction by static electricity in handling the LED. As proactive measures against static electricity, it is effective to earth your body (via 1MΩ), spread conductive mat on the floor, wear semiconductive work uniform and shoes, and use semiconductive containers. Also, be sure to earth the nose of a soldering iron. It is recommended to use an ionizer, etc., in the facility or environment where static electricity may be generated easily.									
Feb. 16. 2001									

Approved <i>T. Ishikawa</i>	Checked <i>M. Horii</i>	Designed <i>K. Takahashi</i>	DEVELOPMENT SPECIFICATION P/N: LNJ310C63RA	18	5

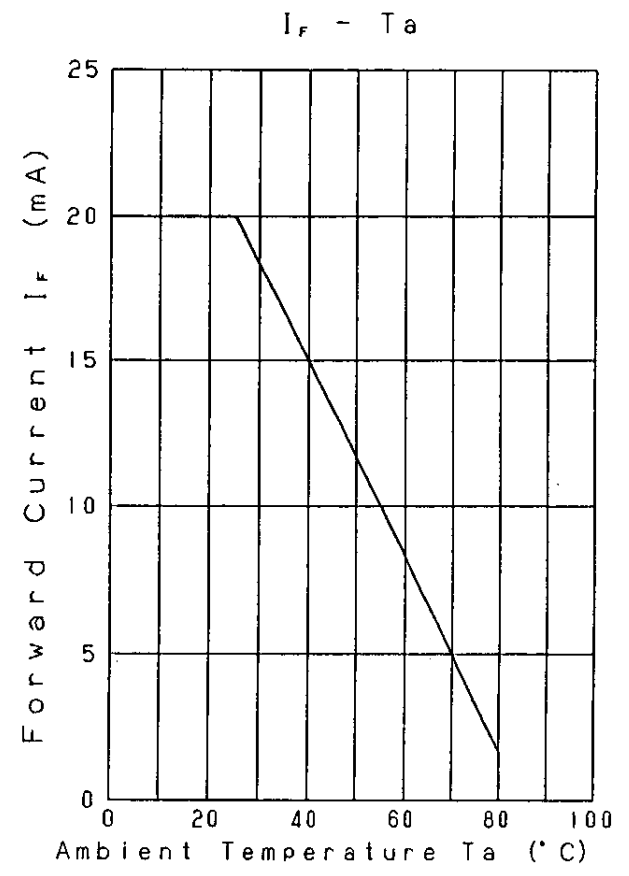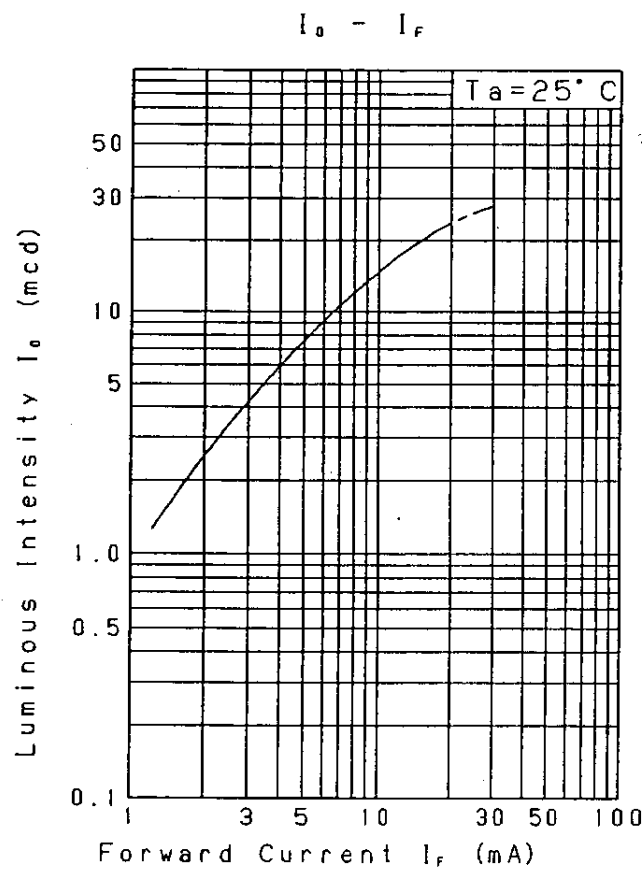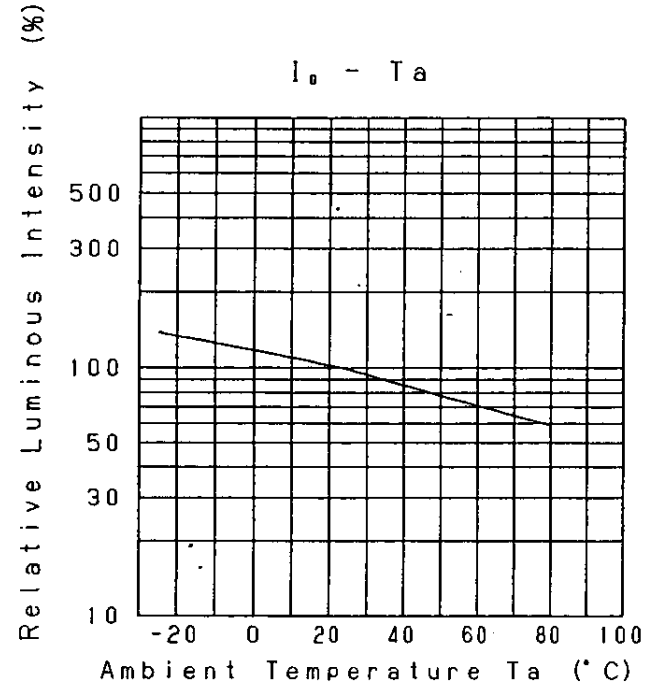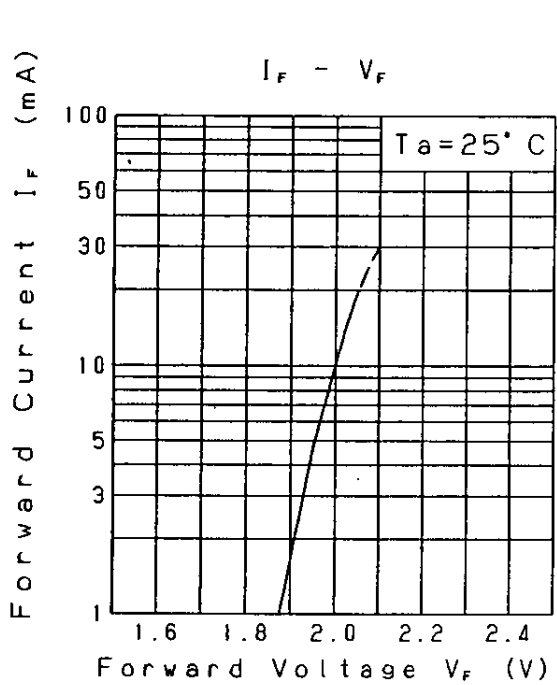


Feb.16.2001

Approved <i>T. Akeda</i>	Checked <i>M. Ko</i>	Designed <i>K. Sakurai</i>	DEVELOPMENT SPECIFICATION		
P/N: LNJ310C63RA			18		6

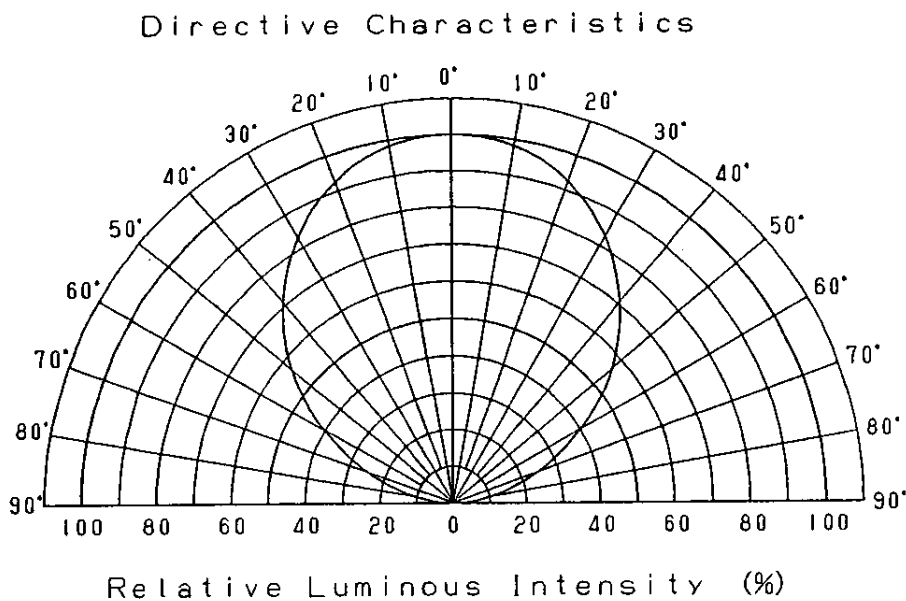
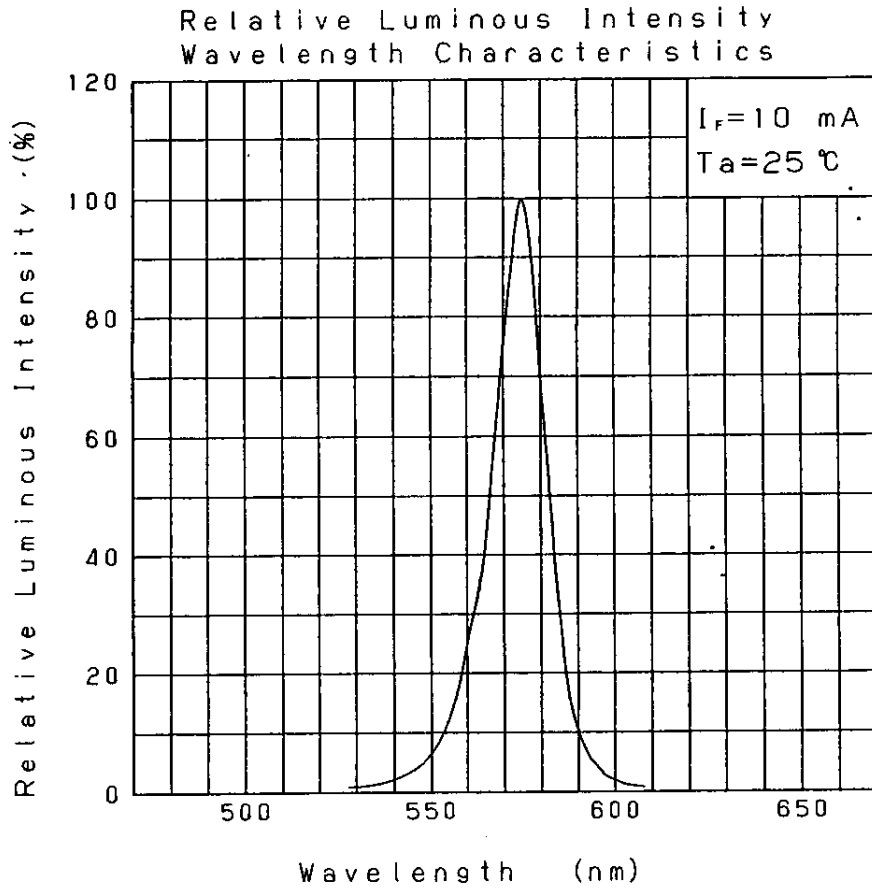


Feb.16.2001

<i>T. Akeda</i>	<i>M. W.</i>	<i>K. Shibasaki</i>	DEVELOPMENT SPECIFICATION (OUTLINE) P/N: LNJ310C63RA	18	7
-----------------	--------------	---------------------	--	----	---

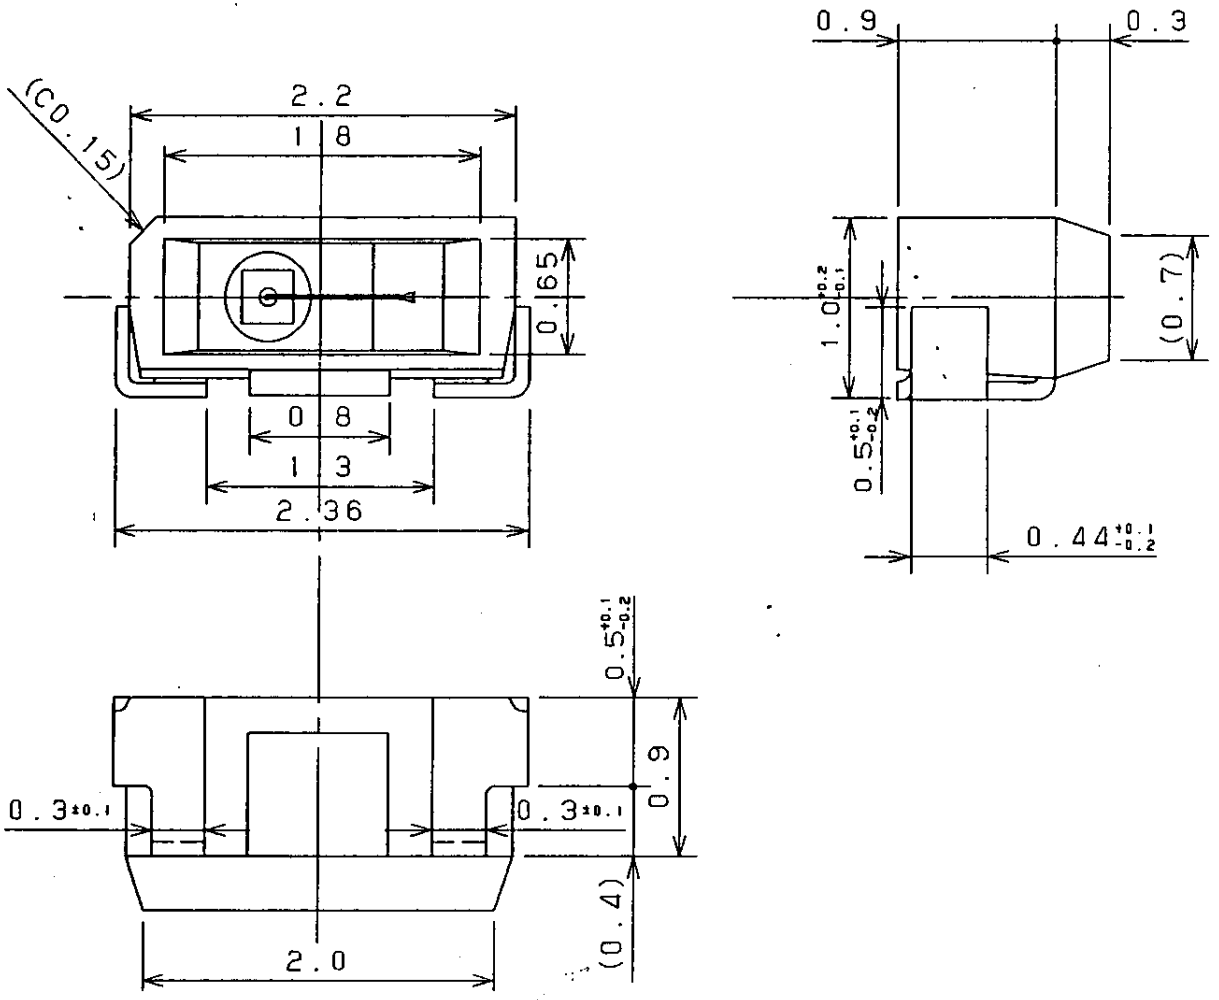

Recommended Land Layout

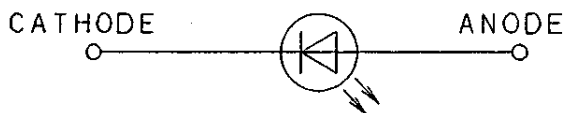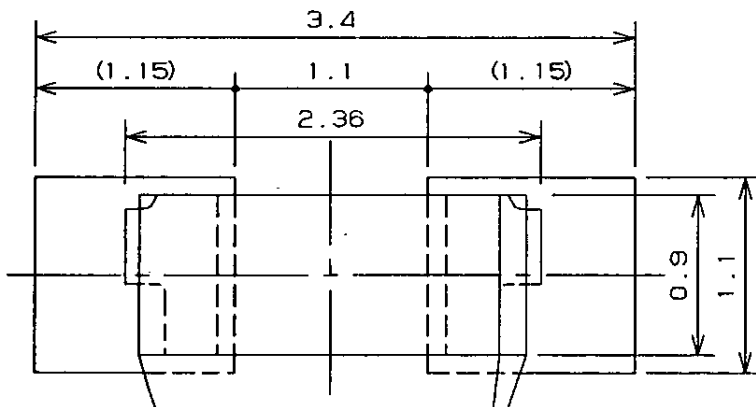

(NOTE)
 1. Unit: mm
 2. Tolerance unless specified is ± 0.15 .

Feb. 16. 2001			
---------------	--	--	--