

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)
[TOBNC10-59/62](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

RoHS COMPLIANT

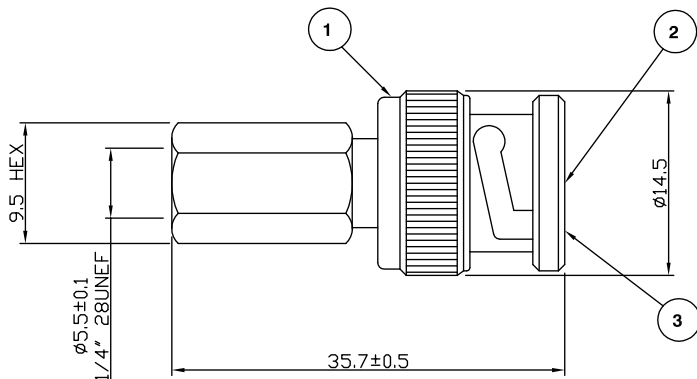

For stripping and assembly instructions see Drawing Number: VAIB1301

Electrical Characteristics

Nominal Impedance:	50 ohms
Frequency Range:	DC to 4 GHz
VSWR:	1.3:1 maximum
Insertion Loss:	0.2 dB at 3 GHz
Operating Voltage (rms):	500 V maximum at sea level
Dielectric Withstand Voltage (rms):	1500 V maximum at sea level
Contact Resistance:	1.5 milliohms maximum
Insulation Resistance:	5000 megohms minimum

Mechanical Characteristics

Mating Cycles:	500 cycles minimum
Interface Dimensions:	Conform to MIL-C-39012

Environmental Characteristics

Temperature Range:	-55 °C to +85 °C
--------------------	------------------

PART	DESCRIPTION
1 Body	Brass, nickel plated 1.78 μ m
2 Contact	Phosphor Bronze, gold plated 0.076 μ m - 0.127 μ m
3 Dielectric	POM

Strip & Crimp dimensions added	JT	4	25 Mar 10
Amended Dimensions	KA	3	30 Aug 07
CAD Issue	SN	2	07 Feb 02
First Issue	AT	1	05 Sept 94
DESCRIPTION OF REVISION	APPVD	ISS	DATE



Cinch Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford, Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:
 $\pm$ 0.2mm unless
otherwise stated

DRAWN BY:

S Nash

CHECKED BY:

P Couzens

APPROVED BY:

P Couzens

DATE:

07 Feb 02

TITLE:

BNC Twist-on Plug for RG59,
RG62

PART NUMBER:

TOBNC10-59/62

PAGE: 1 of 1