

## Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)  
[TOF59](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

RoHS COMPLIANT

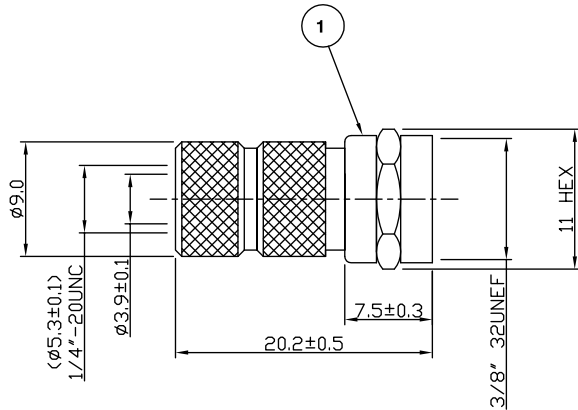

For stripping and assembly instructions see Drawing Number: VAIF1301

**Electrical Characteristics**

Nominal Impedance: Non Constant  
 Frequency Range: DC to 2 GHz  
 VSWR: 1.35:1 maximum  
 Operating Voltage (rms): 250 V maximum at sea level

**Mechanical Characteristics**

Mating Cycles: 200 cycles minimum

**Environmental Characteristics**

Temperature Range: -55 °C to +85 °C

PART	DESCRIPTION
1	Body Brass, nickel plated

DESCRIPTION OF REVISION	APPVD	ISS	DATE
Altered Measurements	KA	4	12 Oct 07
CAD Issue	SN	3	12 Sep 02
Up Issue	SN	2	20 Feb 01
First Issue	SN	1	31 Jul 00



**Cinch Connectivity Solutions**  
 7-13 Russel Way,  
 Widford Industrial Estate,  
 Chelmsford, Essex,  
 CM1 3AA, UK.  
 Tel: +44 (0) 1245 359515  
 Fax: +44 (0) 1245 358938

SCALE: Not To Scale  
 DIMENSIONS: mm  
 TOLERANCES:  
 ± 0.2mm unless  
 otherwise stated

DRAWN BY:	S Nash
CHECKED BY:	P Couzens
APPROVED BY:	P Couzens
DATE:	12 Sep 02

TITLE:  
**F Twist-On Plug for RG59**

PART NUMBER:  
**TOF59**  
 PAGE: 1 of 1