

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)
[131-6701-411](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PART NUMBER	ITEM ①	ITEM ②	ITEM ③	ITEM ④	ITEM ⑤
131-6701-411	BODY BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	CONTACT BRASS GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	INSULATOR TEFLON	WASHER PHOSPHOR BRONZE GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	NUT BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN
131-6701-416	BRASS GOLD PL .0001 MIN OVER COPPER PL .00005 MIN	BRASS GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	PHOSPHOR BRONZE GOLD PL .0001 MIN OVER COPPER PL .00005 MIN	BRASS GOLD PL .0001 MIN OVER COPPER PL .00005 MIN

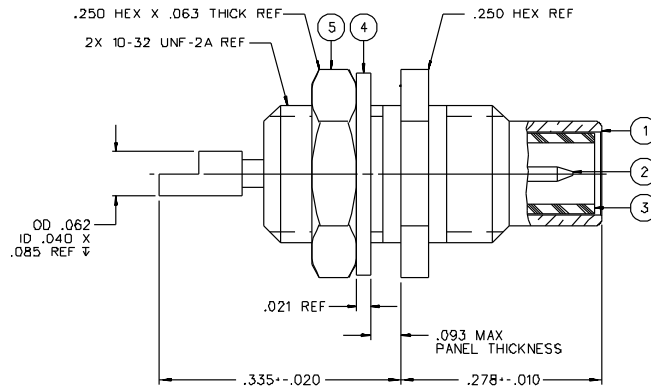

NOTES:

I. SPECIFICATIONS:

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: 0-10 GHz
VSWR: NOT APPLICABLE
WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN AT SEA LEVEL
INSULATION RESISTANCE: 1000 MEGOHM MIN
CONTACT RESISTANCE:
CENTER CONTACT - INITIAL 6 MILLIOHM MAX, AFTER ENVIRONMENTAL 8 MILLIOHM MAX
OUTER CONDUCTOR - INITIAL 1 MILLIOHM MAX, AFTER ENVIRONMENTAL NOT APPLICABLE
BRAID TO BODY - NOT APPLICABLE
CORONA LEVEL: NOT APPLICABLE
INSERTION LOSS: NOT APPLICABLE
RF LEAKAGE: NOT APPLICABLE
RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 600 VRMS AT 4 AND 7 MHZ

MECHANICAL:

ENGAGE/DISENGAGE TORQUE: 16 INCH-OUNCES MAX
MATING TORQUE: 35-50 INCH-OUNCES
COUPLING PROOF TORQUE: NOT APPLICABLE
COUPLING NUT RETENSION: NOT APPLICABLE
CONTACT RETENSION: 4 LBS MIN AXIAL FORCE
CABLE ACCEPTABILITY: NOT APPLICABLE
CABLE HEX CRIMP SIZE: NOT APPLICABLE
CABLE RETENTION: NOT APPLICABLE
DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-C-39012)
THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B
OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C
CORROSION: MIL-STD-202, METHOD 101, CONDITION B
SHOCK: MIL-STD-202, METHOD 213, CONDITION C
VIBRATION: MIL-STD-202, METHOD 204, CONDITION D

DRAWING NO.	C - 131-6701-411/420
0	REVISIONS
CHANGED:	REVISED AND REDRAWN.
WAS "C" SIZE, DATED	5-13-86.
03	04-04-88 E J R R F R J B 05-18-88 ECO 23406
VAX VERSION UPDATE:	
04	11-07-88 E J R R F R J B 11-10-88 ECO 23691
CHANGED:	RF HIGH POT 4 AND 7 MHZ WAS 5 MHZ
REVISION NUMBER FOLLOWED BY AN ALPHA:	
CHANGES INDICATES DRAWING CHG:	
DATE OR PART NUMBER ADDITION ONLY:	
40	3-13-98 R H A ECN 44921

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED PER ANSI Y 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN BY E J	DATE 8-14-87	JOHNSON Cinch Connectivity Solutions 299 Johnson Ave. Ste 100 Warren, MI 48093 1-800-247-8236
DECIMALS .XX .XXX MIL FINISH	CHECKED BY RRF APPROVED BY RJB RELEASE DATE (10-14-86) 5-16-88	DATE 5-16-88 DATE 5-16-88 DATE 5-16-88	TITLE JACK ASSEMBLY FRONT MOUNT BULKHEAD SMC CODE NO. DRAWING NO. C - 131-6701-411/420
SCALE 10:1	U/N INCH	SHEET 2 OF 2	