

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated](#)  
[AZ78L05RTR-G1](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



## 3-TERMINAL POSITIVE LINEAR REGULATOR

**AZ78LXX**

### General Description

The AZ78LXX series are three terminal positive regulators with several fixed output voltages. These regulators can provide local on card regulation, eliminating the distribution problems associated with single point regulation. The AZ78LXX can be used in logic systems, instrumentation, HiFi, and other solid state electronic equipment. When used as a Zener diode/resistor combination replacement, the AZ78LXX usually results an effective output impedance improvement of two orders of magnitude, and lower quiescent current.

With adequate heat sinking the AZ78LXX can deliver 100mA output current. Current limiting is included to limit the peak output current to a safe value. Thermal protection is also provided. If internal power dissipation becomes too high for the heat sinking provided, the thermal shutdown circuit takes over preventing the IC from overheating.

The AZ78LXX are available in the plastic TO-92 (bulk or ammo packing), SOT-223 and SOT-89 packages.

### Features

- Output Current up to 100mA
- Fixed Output Voltages of 5V, 8V, 9V and 12V
- Output Voltage Tolerances of  $\pm 5\%$  over the Full Temperature Range
- Internal Short Circuit Current-limiting
- Internal Thermal Overload Protection
- No External Components

### Applications

- High Efficiency Linear Regulator
- Post Regulation for Switching Supply
- Microprocessor Power Supply
- Mother Board I/O Power Supply

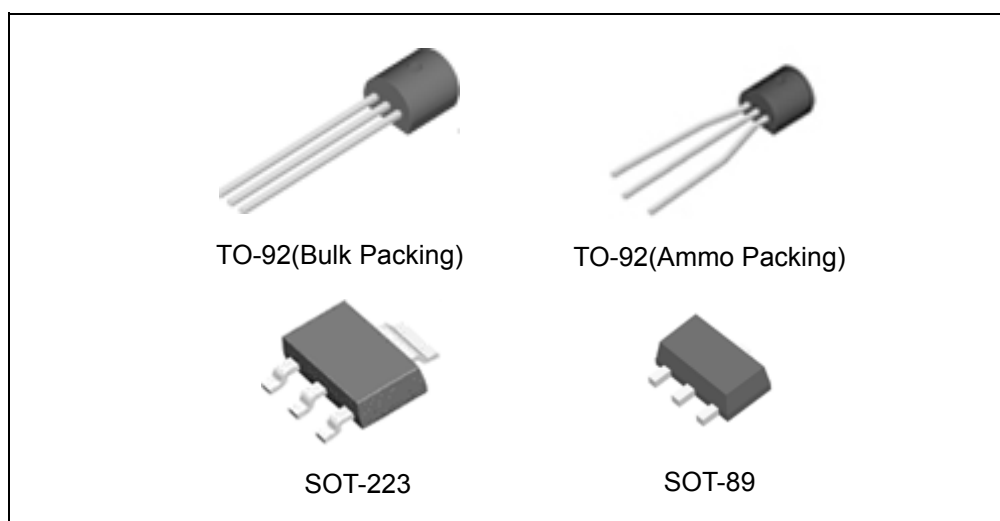


Figure 1. Package Types of the AZ78LXX




Data Sheet

## 3-TERMINAL POSITIVE LINEAR REGULATOR


**AZ78LXX**

### Pin Configuration


Z Package  
(TO-92(Bulk Packing))



Z Package  
(TO-92(Ammo Packing))



H Package  
(SOT-223)

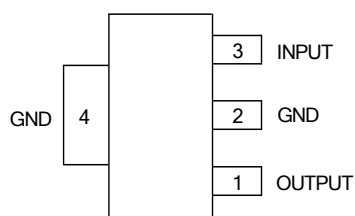

Connect pin 4 to pin 2 or leave  
pin 4 electrically isolated

R Package  
(SOT-89)




Figure 2. Pin Configuration of the AZ78LXX (Top View)



Data Sheet

# **3-TERMINAL POSITIVE LINEAR REGULATOR**

**AZ78LXX**

## **Functional Block Diagram**

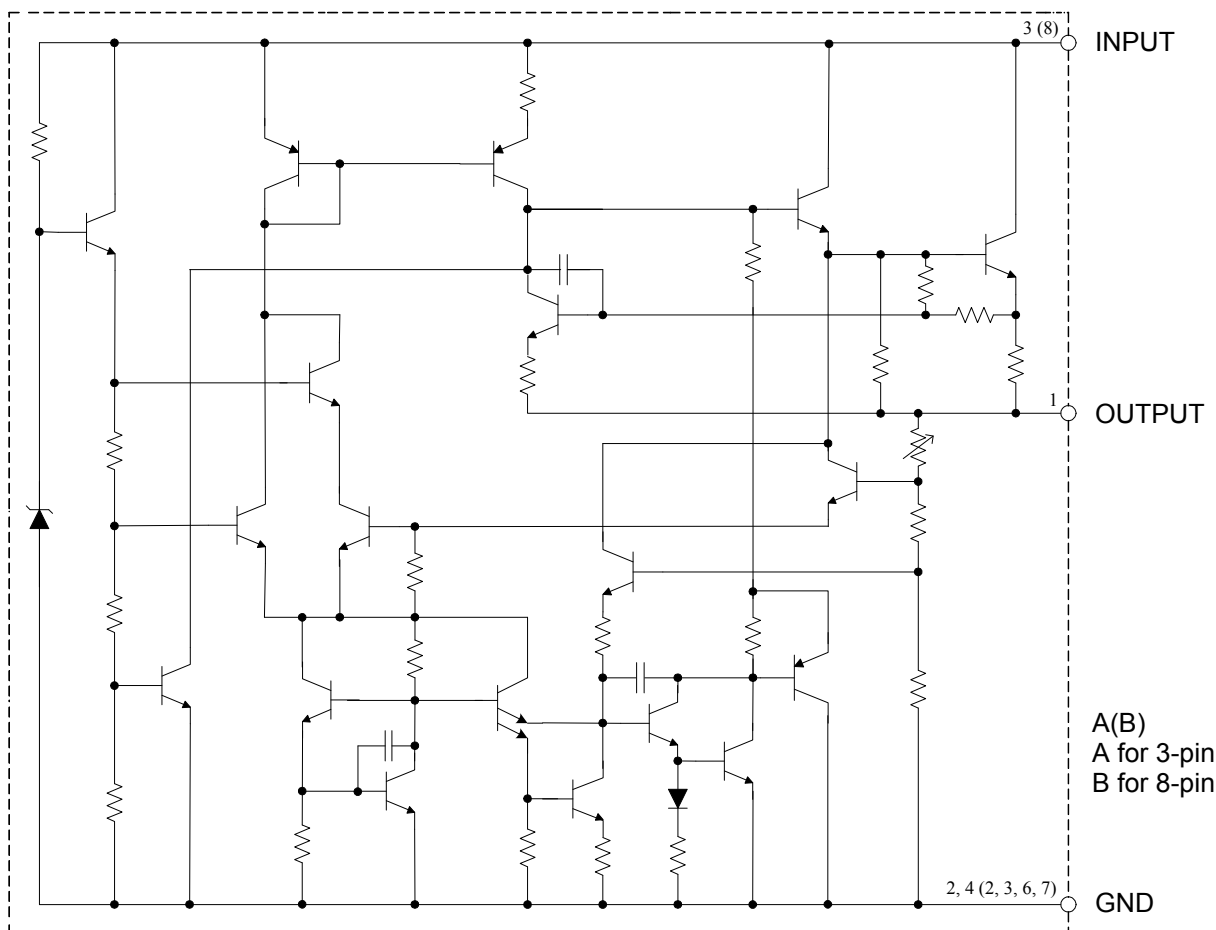



Figure 3. Functional Block Diagram of the AZ78LXX



### 3-TERMINAL POSITIVE LINEAR REGULATOR

# AZ78LXX

## Ordering Information

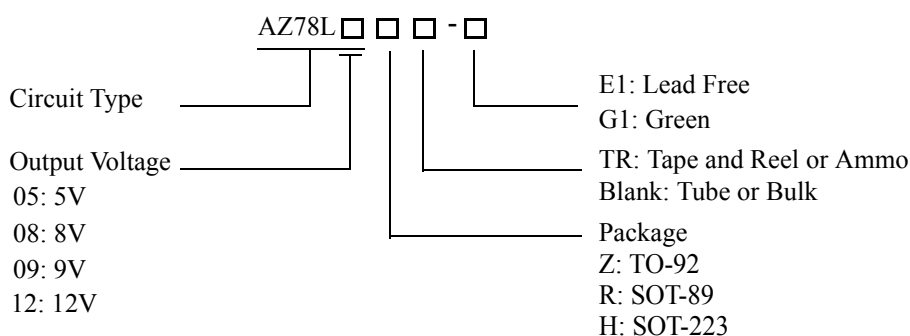

| Package | Temperature Range | Part Number   |               | Marking ID  |             | Packing Type |
|---------|-------------------|---------------|---------------|-------------|-------------|--------------|
|         |                   | Lead Free     | Green         | Lead Free   | Green       |              |
| TO-92   | -40 to 125°C      | AZ78L05Z-E1   | AZ78L05Z-G1   | AZ78L05Z-E1 | AZ78L05Z-G1 | Bulk         |
|         |                   | AZ78L05ZTR-E1 | AZ78L05ZTR-G1 | AZ78L05Z-E1 | AZ78L05Z-G1 | Ammo         |
|         |                   | AZ78L08Z-E1   | AZ78L08Z-G1   | AZ78L08Z-E1 | AZ78L08Z-G1 | Bulk         |
|         |                   | AZ78L08ZTR-E1 | AZ78L08ZTR-G1 | AZ78L08Z-E1 | AZ78L08Z-G1 | Ammo         |
|         |                   | AZ78L09Z-E1   | AZ78L09Z-G1   | AZ78L09Z-E1 | AZ78L09Z-G1 | Bulk         |
|         |                   | AZ78L09ZTR-E1 | AZ78L09ZTR-G1 | AZ78L09Z-E1 | AZ78L09Z-G1 | Ammo         |
|         |                   | AZ78L12Z-E1   | AZ78L12Z-G1   | AZ78L12Z-E1 | AZ78L12Z-G1 | Bulk         |
|         |                   | AZ78L12ZTR-E1 | AZ78L12ZTR-G1 | AZ78L12Z-E1 | AZ78L12Z-G1 | Ammo         |
| SOT-89  | -40 to 125°C      | AZ78L05RTR-E1 | AZ78L05RTR-G1 | E78A        | G78A        | Tape & Reel  |
|         |                   | AZ78L08RTR-E1 | AZ78L08RTR-G1 | E78B        | G78B        | Tape & Reel  |
|         |                   | AZ78L09RTR-E1 | AZ78L09RTR-G1 | E78C        | G78C        | Tape & Reel  |
|         |                   | AZ78L12RTR-E1 | AZ78L12RTR-G1 | E78D        | G78D        | Tape & Reel  |
| SOT-223 | -40 to 125°C      | AZ78L05HTR-E1 | AZ78L05HTR-G1 | EH78A       | GH78A       | Tape & Reel  |
|         |                   | AZ78L08HTR-E1 | AZ78L08HTR-G1 | EH78B       | GH78B       | Tape & Reel  |
|         |                   | AZ78L09HTR-E1 | AZ78L09HTR-G1 | EH78C       | GH78C       | Tape & Reel  |
|         |                   | AZ78L12HTR-E1 | AZ78L12HTR-G1 | EH78D       | GH78D       | Tape & Reel  |

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.



## Data Sheet

### 3-TERMINAL POSITIVE LINEAR REGULATOR

**AZ78LXX**

#### Absolute Maximum Ratings (Note 1)

| Parameter                               | Symbol     | Value      |      | Unit |
|-----------------------------------------|------------|------------|------|------|
| Input Voltage                           | $V_{IN}$   | 20         |      | V    |
| Operating Junction Temperature          | $T_J$      | 150        |      | °C   |
| Lead Temperature (Soldering, 10sec)     | $T_{LEAD}$ | 260        |      | °C   |
| Power Dissipation ( $T_A=25^{\circ}C$ ) | $P_D$      | TO-92      | 0.65 | W    |
|                                         |            | SOT-223    | 0.7  |      |
|                                         |            | SOT-89     | 0.65 |      |
| Storage Temperature Range               | $T_{STG}$  | -65 to 150 |      | °C   |
| ESD (Human Body Model)                  | ESD        | 2000       |      | V    |
| ESD (Machine Model)                     | ESD        | 200        |      | V    |

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

#### Recommended Operating Conditions

| Parameter                      |         | Symbol   | Min | Max | Unit |
|--------------------------------|---------|----------|-----|-----|------|
| Input Voltage                  | AZ78L05 | $V_{IN}$ |     | 15  | V    |
|                                | AZ78L08 |          |     | 18  |      |
|                                | AZ78L09 |          |     | 18  |      |
|                                | AZ78L12 |          |     | 18  |      |
| Operating Junction Temperature |         | $T_J$    | -40 | 125 | °C   |



## Data Sheet

### 3-TERMINAL POSITIVE LINEAR REGULATOR

**AZ78LXX**

#### Electrical Characteristics

#### AZ78L05 Electrical Characteristics

Limits in standard typeface are for  $T_J=25^{\circ}\text{C}$ , **Bold typeface applies over  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$** ,  $I_{\text{OUT}}=40\text{mA}$ ,  $C_{\text{IN}}=0.33\mu\text{F}$ ,  $C_{\text{OUT}}=0.1\mu\text{F}$ ,  $V_{\text{IN}}=10\text{V}$ , unless otherwise specified.

| Parameter                                                           | Symbol                             | Conditions                                                                                                       | Min         | Typ  | Max         | Unit                   |
|---------------------------------------------------------------------|------------------------------------|------------------------------------------------------------------------------------------------------------------|-------------|------|-------------|------------------------|
| Output Voltage                                                      | $V_{\text{OUT}}$                   |                                                                                                                  | 4.8         | 5    | 5.2         | V                      |
|                                                                     |                                    | $7.0\text{V} \leq V_{\text{IN}} \leq 15\text{V}$<br>$1.0\text{mA} \leq I_{\text{OUT}} \leq 40\text{mA}$ (Note 2) | <b>4.75</b> |      | <b>5.25</b> |                        |
| Line Regulation                                                     | $V_{\text{RLINE}}$                 | $7.0\text{V} \leq V_{\text{IN}} \leq 15\text{V}$                                                                 |             | 18   | 75          | mV                     |
| Load Regulation                                                     | $V_{\text{RLOAD}}$                 | $1.0\text{mA} \leq I_{\text{OUT}} \leq 100\text{mA}$                                                             |             | 20   | 60          | mV                     |
| Dropout Voltage                                                     | $V_{\text{DROP}}$                  |                                                                                                                  |             | 1.6  |             | V                      |
| Current Limit                                                       | $I_{\text{LIMIT}}$                 | $T_J=25^{\circ}\text{C}$                                                                                         |             | 150  |             | mA                     |
| Quiescent Current                                                   | $I_{\text{Q}}$                     | $I_{\text{OUT}}=0$                                                                                               |             | 3    | 5           | mA                     |
| Quiescent Current Change                                            | $\Delta I_{\text{Q}}$              | $8.0\text{V} \leq V_{\text{IN}} \leq 15\text{V}$                                                                 |             |      | <b>1.0</b>  | mA                     |
|                                                                     |                                    | $1.0\text{mA} \leq I_{\text{OUT}} \leq 40\text{mA}$                                                              |             |      | <b>0.1</b>  |                        |
| Output Noise Voltage                                                | $N_{\text{O}}$                     | $10\text{Hz} \leq f \leq 100\text{kHz}$ (Note 3)                                                                 |             | 40   |             | $\mu\text{V}$          |
| Ripple Rejection                                                    | PSRR                               | $f=120\text{Hz}$ , $8.0\text{V} \leq V_{\text{IN}} \leq 15\text{V}$                                              | 47          | 62   |             | dB                     |
| Peak Output Current                                                 | $I_{\text{PK}}$                    |                                                                                                                  |             | 150  |             | mA                     |
| Average Temperature Coefficient of Output Voltage                   | $\Delta V_{\text{OUT}} / \Delta T$ | $I_{\text{OUT}} = 5.0\text{mA}$                                                                                  |             | 0.65 |             | mV/ $^{\circ}\text{C}$ |
| Minimum Value of Input Voltage Required to Maintain Line Regulation | $V_{\text{IN}} (\text{Min})$       |                                                                                                                  |             | 6.7  | 7           | V                      |
| Thermal Resistance                                                  | $\theta_{\text{JC}}$               | TO-92                                                                                                            |             | 81   |             | $^{\circ}\text{C/W}$   |
|                                                                     |                                    | SOT-89                                                                                                           |             | 29.8 |             |                        |
|                                                                     |                                    | SOT-223                                                                                                          |             | 71   |             |                        |

Note 2: Power Dissipation  $\leq 0.6\text{W}$

Note 3: Recommended minimum load capacitance of  $0.01\mu\text{F}$  to limit high frequency noise.



## Data Sheet

### 3-TERMINAL POSITIVE LINEAR REGULATOR

### AZ78LXX

#### Electrical Characteristics (Continued)

#### AZ78L08 Electrical Characteristics

Limits in standard typeface are for  $T_J=25^{\circ}\text{C}$ , **Bold typeface applies over  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$** ,  $I_{\text{OUT}}=40\text{mA}$ ,  $C_{\text{IN}}=0.33\mu\text{F}$ ,  $C_{\text{OUT}}=0.1\mu\text{F}$ ,  $V_{\text{IN}}=14\text{V}$ , unless otherwise specified.

| Parameter                                                           | Symbol                             | Conditions                                                                                                    | Min        | Typ | Max        | Unit                   |
|---------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------------------------------|------------|-----|------------|------------------------|
| Output Voltage                                                      | $V_{\text{OUT}}$                   |                                                                                                               | 7.7        | 8.0 | 8.3        | V                      |
|                                                                     |                                    | $11\text{V} \leq V_{\text{IN}} \leq 18\text{V}$<br>$1.0\text{mA} \leq I_{\text{OUT}} \leq 40\text{mA}$ (Note) | <b>7.6</b> |     | <b>8.4</b> |                        |
| Line Regulation                                                     | $V_{\text{RLINE}}$                 | $11\text{V} \leq V_{\text{IN}} \leq 18\text{V}$                                                               |            | 18  | 75         | mV                     |
| Load Regulation                                                     | $V_{\text{RLOAD}}$                 | $1.0\text{mA} \leq I_{\text{OUT}} \leq 100\text{mA}$                                                          |            | 20  | 90         | mV                     |
| Dropout Voltage                                                     | $V_{\text{DROP}}$                  |                                                                                                               |            | 1.6 |            | V                      |
| Current Limit                                                       | $I_{\text{LIMIT}}$                 | $T_J=25^{\circ}\text{C}$                                                                                      |            | 150 |            | mA                     |
| Quiescent Current                                                   | $I_{\text{Q}}$                     | $I_{\text{OUT}}=0$                                                                                            |            | 3   | 5          | mA                     |
| Quiescent Current Change                                            | $\Delta I_{\text{Q}}$              | $11\text{V} \leq V_{\text{IN}} \leq 18\text{V}$                                                               |            |     | <b>1.5</b> | mA                     |
|                                                                     |                                    | $1.0\text{mA} \leq I_{\text{OUT}} \leq 40\text{mA}$                                                           |            |     | <b>0.1</b> |                        |
| Output Noise Voltage                                                | $N_{\text{O}}$                     | $10\text{Hz} \leq f \leq 100\text{kHz}$ (Note 3)                                                              |            | 60  |            | $\mu\text{V}$          |
| Ripple Rejection                                                    | PSRR                               | $f=120\text{Hz}$ , $11\text{V} \leq V_{\text{IN}} \leq 18\text{V}$                                            | 39         | 45  |            | dB                     |
| Peak Output Current                                                 | $I_{\text{PK}}$                    |                                                                                                               |            | 150 |            | mA                     |
| Average Temperature Coefficient of Output Voltage                   | $\Delta V_{\text{OUT}} / \Delta T$ | $I_{\text{OUT}}=5.0\text{mA}$                                                                                 |            | 0.8 |            | mV/ $^{\circ}\text{C}$ |
| Minimum Value of Input Voltage Required to Maintain Line Regulation | $V_{\text{IN}}(\text{Min})$        |                                                                                                               |            | 9.7 |            | V                      |
| Thermal Resistance                                                  | $\theta_{\text{JC}}$               | TO-92                                                                                                         |            | 81  |            | $^{\circ}\text{C/W}$   |
|                                                                     |                                    | SOT-89                                                                                                        |            | 84  |            |                        |
|                                                                     |                                    | SOT-223                                                                                                       |            | 71  |            |                        |

Note 2: Power Dissipation  $\leq 0.6\text{W}$

Note 3: Recommended minimum load capacitance of  $0.01\mu\text{F}$  to limit high frequency noise.



## Data Sheet

### 3-TERMINAL POSITIVE LINEAR REGULATOR

### AZ78LXX

#### Electrical Characteristics (Continued)

#### AZ78L09 Electrical Characteristics

Limits in standard typeface are for  $T_J=25^{\circ}\text{C}$ , **Bold typeface applies over  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$** ,  $I_{\text{OUT}}=40\text{mA}$ ,  $C_{\text{IN}}=0.33\mu\text{F}$ ,  $C_{\text{OUT}}=0.1\mu\text{F}$ ,  $V_{\text{IN}}=15\text{V}$ , unless otherwise specified.

| Parameter                                                           | Symbol                           | Conditions                                                                                                      | Min         | Typ  | Max         | Unit                        |
|---------------------------------------------------------------------|----------------------------------|-----------------------------------------------------------------------------------------------------------------|-------------|------|-------------|-----------------------------|
| Output Voltage                                                      | $V_{\text{OUT}}$                 |                                                                                                                 | 8.6         | 9    | 9.4         | V                           |
|                                                                     |                                  | $12\text{V} \leq V_{\text{IN}} \leq 18\text{V}$<br>$1.0\text{mA} \leq I_{\text{OUT}} \leq 40\text{mA}$ (Note 2) | <b>8.55</b> |      | <b>9.45</b> |                             |
| Line Regulation                                                     | $V_{\text{RLINE}}$               | $12\text{V} \leq V_{\text{IN}} \leq 18\text{V}$                                                                 |             | 18   | 75          | mV                          |
| Load Regulation                                                     | $V_{\text{RLOAD}}$               | $1.0\text{mA} \leq I_{\text{OUT}} \leq 100\text{mA}$                                                            |             | 20   | 90          | mV                          |
| Dropout Voltage                                                     | $V_{\text{DROP}}$                |                                                                                                                 |             | 1.6  |             | V                           |
| Current Limit                                                       | $I_{\text{LIMIT}}$               | $T_J=25^{\circ}\text{C}$                                                                                        |             | 150  |             | mA                          |
| Quiescent Current                                                   | $I_{\text{Q}}$                   | $I_{\text{OUT}}=0$                                                                                              |             | 3    | 5           | mA                          |
| Quiescent Current Change                                            | $\Delta I_{\text{Q}}$            | $12\text{V} \leq V_{\text{IN}} \leq 18\text{V}$                                                                 |             |      | <b>1.5</b>  | mA                          |
|                                                                     |                                  | $1.0\text{mA} \leq I_{\text{OUT}} \leq 40\text{mA}$                                                             |             |      | <b>0.1</b>  |                             |
| Output Noise Voltage                                                | $N_{\text{O}}$                   | $10\text{Hz} \leq f \leq 100\text{kHz}$ (Note 3)                                                                |             | 70   |             | $\mu\text{V}$               |
| Ripple Rejection                                                    | PSRR                             | $f=120\text{Hz}$ , $12\text{V} \leq V_{\text{IN}} \leq 18\text{V}$                                              | 38          | 44   |             | dB                          |
| Peak Output Current                                                 | $I_{\text{PK}}$                  |                                                                                                                 |             | 150  |             | mA                          |
| Average Temperature Coefficient of Output Voltage                   | $\Delta V_{\text{OUT}}/\Delta T$ | $I_{\text{OUT}}=5.0\text{mA}$                                                                                   |             | 0.9  |             | mV/ $^{\circ}\text{C}$      |
| Minimum Value of Input Voltage Required to Maintain Line Regulation | $V_{\text{IN}}(\text{Min})$      |                                                                                                                 |             | 10.7 |             | V                           |
| Thermal Resistance                                                  | $\theta_{\text{JC}}$             | TO-92                                                                                                           |             | 81   |             | $^{\circ}\text{C}/\text{W}$ |
|                                                                     |                                  | SOT-89                                                                                                          |             | 84   |             |                             |
|                                                                     |                                  | SOT-223                                                                                                         |             | 71   |             |                             |

Note 2: Power Dissipation  $\leq 0.6\text{W}$

Note 3: Recommended minimum load capacitance of  $0.01\mu\text{F}$  to limit high frequency noise.



## Data Sheet

### 3-TERMINAL POSITIVE LINEAR REGULATOR

### AZ78LXX

#### Electrical Characteristics (Continued)

#### AZ78L12 Electrical Characteristics

Limits in standard typeface are for  $T_J=25^\circ\text{C}$ , **Bold typeface applies over  $-40^\circ\text{C}$  to  $125^\circ\text{C}$** ,  $I_{OUT}=40\text{mA}$ ,  $C_{IN}=0.33\mu\text{F}$ ,  $C_{OUT}=0.1\mu\text{F}$ ,  $V_{IN}=18\text{V}$ , unless otherwise specified.

| Parameter                                                           | Symbol                    | Conditions                                                                                        | Min         | Typ  | Max         | Unit          |
|---------------------------------------------------------------------|---------------------------|---------------------------------------------------------------------------------------------------|-------------|------|-------------|---------------|
| Output Voltage                                                      | $V_{OUT}$                 |                                                                                                   | 11.5        | 12   | 12.5        | V             |
|                                                                     |                           | $15\text{V} \leq V_{IN} \leq 18\text{V}$<br>$1.0\text{mA} \leq I_{OUT} \leq 40\text{mA}$ (Note 2) | <b>11.4</b> |      | <b>12.6</b> |               |
| Line Regulation                                                     | $V_{RLINE}$               | $15\text{V} \leq V_{IN} \leq 18\text{V}$                                                          |             | 18   | 75          | mV            |
| Load Regulation                                                     | $V_{RLOAD}$               | $1.0\text{mA} \leq I_{OUT} \leq 100\text{mA}$                                                     |             | 20   | 90          | mV            |
| Dropout Voltage                                                     | $V_{DROP}$                |                                                                                                   |             | 1.6  |             | V             |
| Current Limit                                                       | $I_{LIMIT}$               | $T_J=25^\circ\text{C}$                                                                            |             | 150  |             | mA            |
| Quiescent Current                                                   | $I_Q$                     | $I_{OUT}=0$                                                                                       |             | 3    | 5           | mA            |
| Quiescent Current Change                                            | $\Delta I_Q$              | $15\text{V} \leq V_{IN} \leq 18\text{V}$                                                          |             |      | <b>1.5</b>  | mA            |
|                                                                     |                           | $1.0\text{mA} \leq I_{OUT} \leq 40\text{mA}$                                                      |             |      | <b>0.1</b>  |               |
| Output Noise Voltage                                                | $N_O$                     | $10\text{Hz} \leq f \leq 100\text{kHz}$ (Note 3)                                                  |             | 80   |             | $\mu\text{V}$ |
| Ripple Rejection                                                    | PSRR                      | $f=120\text{Hz}$ , $15\text{V} \leq V_{IN} \leq 18\text{V}$                                       | 40          | 54   |             | dB            |
| Peak Output Current                                                 | $I_{PK}$                  |                                                                                                   |             | 150  |             | mA            |
| Average Temperature Coefficient of Output Voltage                   | $\Delta V_{OUT}/\Delta T$ | $I_{OUT} = 5.0\text{mA}$                                                                          |             | 1.0  |             | mV/°C         |
| Minimum Value of Input Voltage Required to Maintain Line Regulation | $V_{IN}(\text{Min})$      |                                                                                                   |             | 13.7 |             | V             |
| Thermal Resistance                                                  | $\theta_{JC}$             | TO-92                                                                                             |             | 81   |             | °C/W          |
|                                                                     |                           | SOT-89                                                                                            |             | 84   |             |               |
|                                                                     |                           | SOT-223                                                                                           |             | 71   |             |               |

Note 2: Power Dissipation  $\leq 0.6\text{W}$

Note 3: Recommended minimum load capacitance of  $0.01\mu\text{F}$  to limit high frequency noise.



Data Sheet

### 3-TERMINAL POSITIVE LINEAR REGULATOR

**AZ78LXX**

#### Typical Performance Characteristics

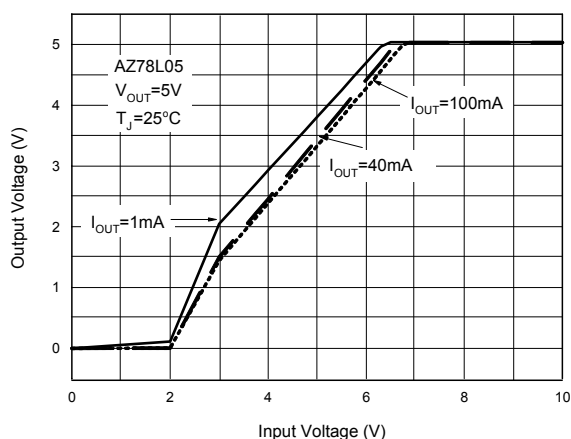


Figure 4. Dropout Characteristics

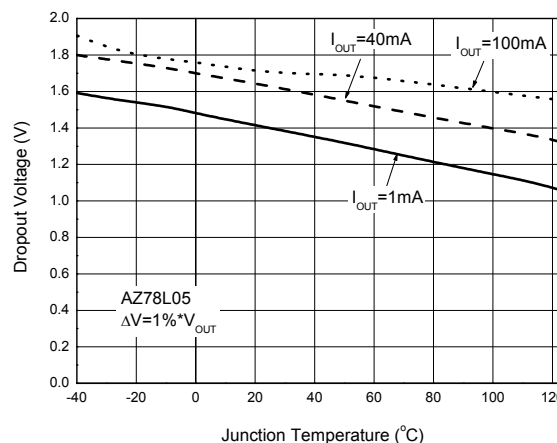


Figure 5. Dropout Voltage vs. Junction Temperature

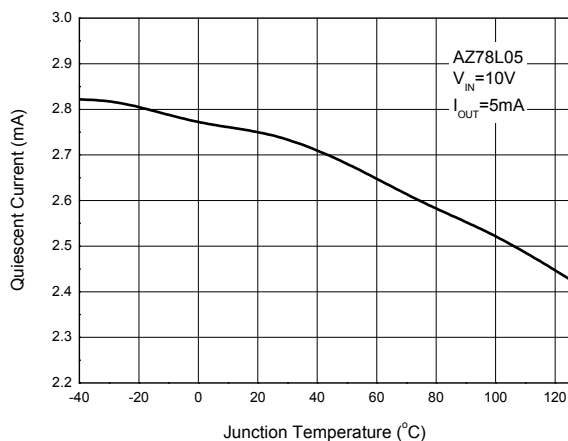


Figure 6. Quiescent Current vs. Junction Temperature

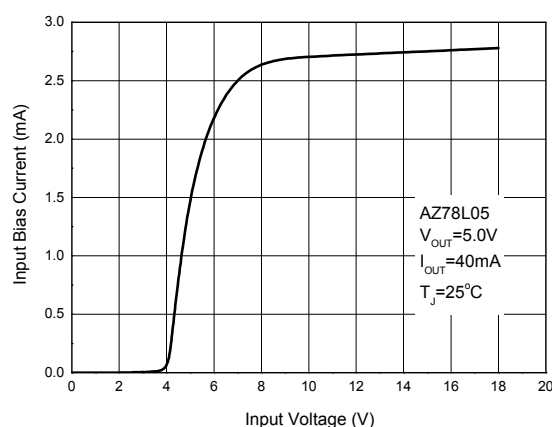


Figure 7. Input Bias Current vs. Input Voltage



Data Sheet

### 3-TERMINAL POSITIVE LINEAR REGULATOR

**AZ78LXX**

#### Typical Performance Characteristics (Continued)

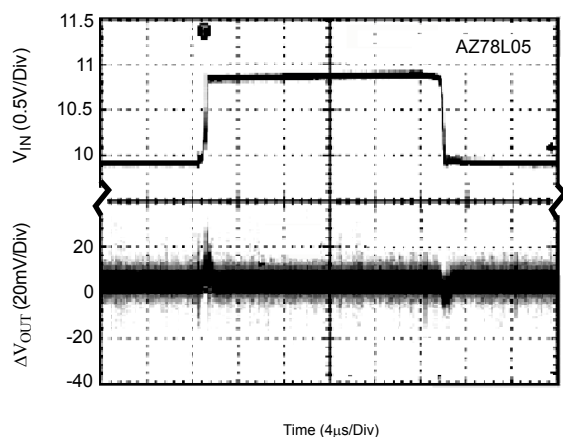


Figure 8. Line Transient Response  
(Conditions:  $V_{IN}=10$  to  $11V$ ,  $V_{OUT}=5V$ ,  $I_{OUT}=40mA$ )

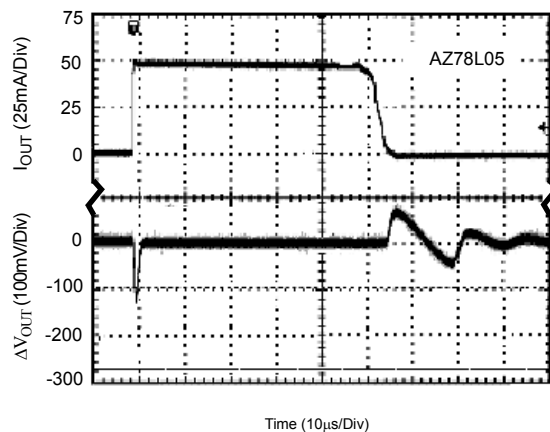


Figure 9. Load Transient Response  
(Conditions:  $V_{IN}=10V$ ,  $V_{OUT}=5V$ ,  $I_{OUT}=1$  to  $50mA$ )




Data Sheet

### 3-TERMINAL POSITIVE LINEAR REGULATOR

**AZ78LXX**

#### Typical Application

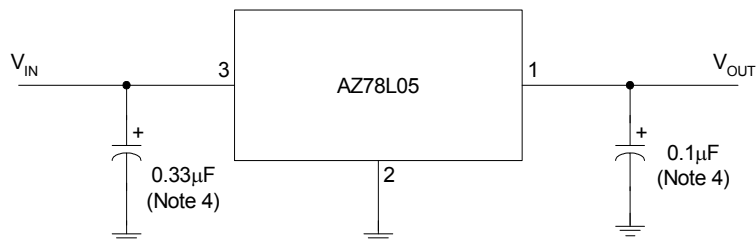

Note 4: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulator.

Figure 10. Typical Application of the AZ78LXX



Data Sheet


### 3-TERMINAL POSITIVE LINEAR REGULATOR

**AZ78LXX**

#### Mechanical Dimensions

**TO-92(Bulk Packing)**

**Unit: mm(inch)**

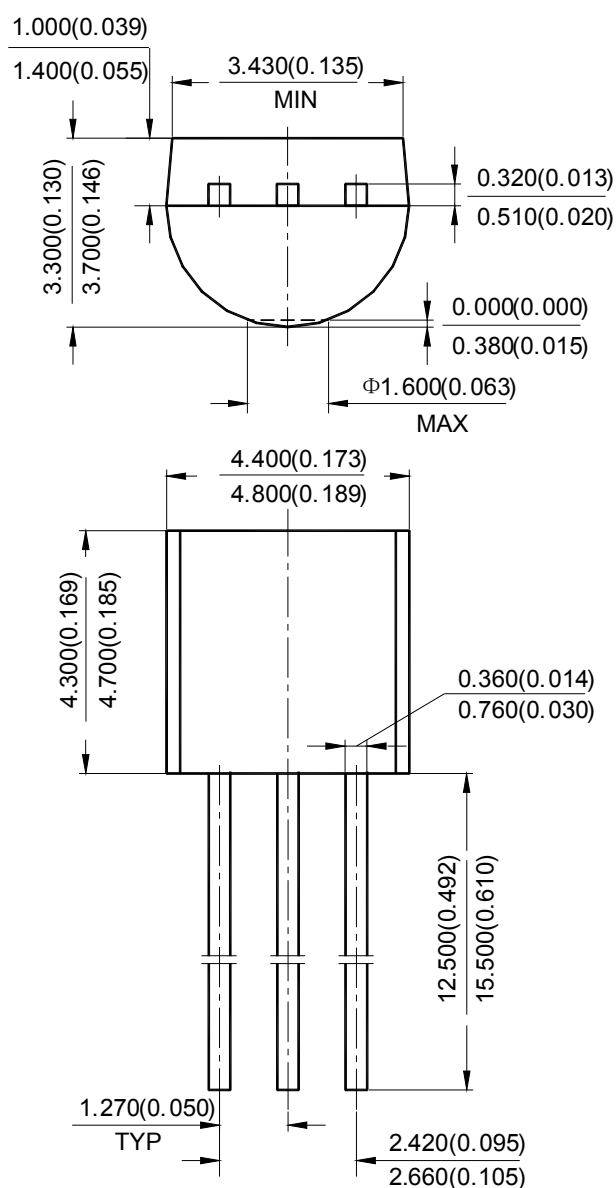



Data Sheet



### 3-TERMINAL POSITIVE LINEAR REGULATOR

**AZ78LXX**

#### Mechanical Dimensions (Continued)

**TO-92(Ammo Packing)**

**Unit: mm(inch)**

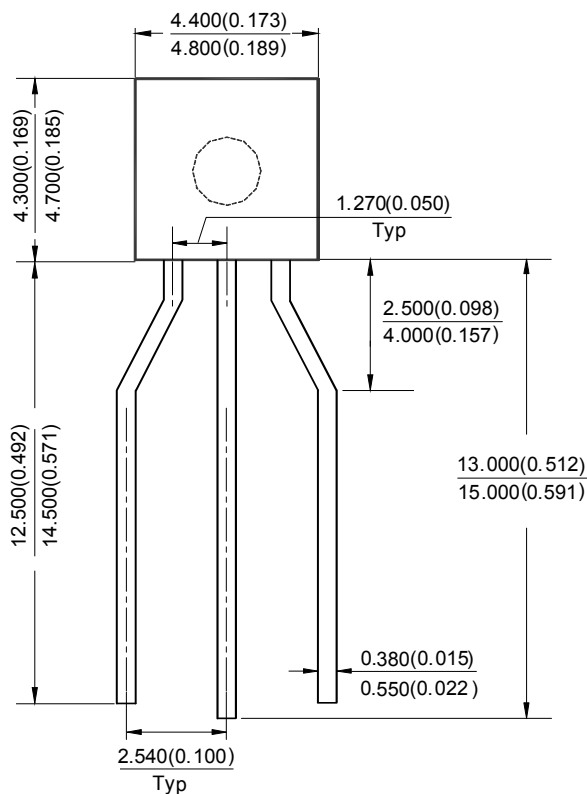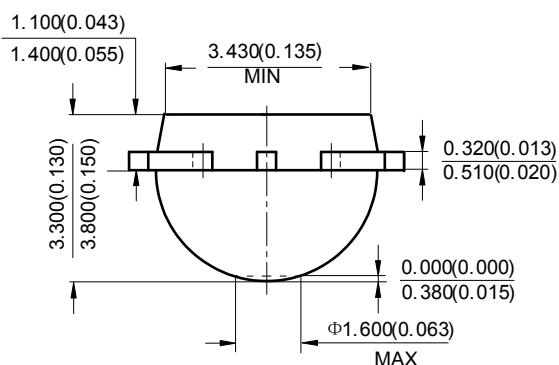



Data Sheet


**3-TERMINAL POSITIVE LINEAR REGULATOR**

**AZ78LXX**

**Mechanical Dimensions (Continued)**

**SOT-223**

**Unit: mm(inch)**

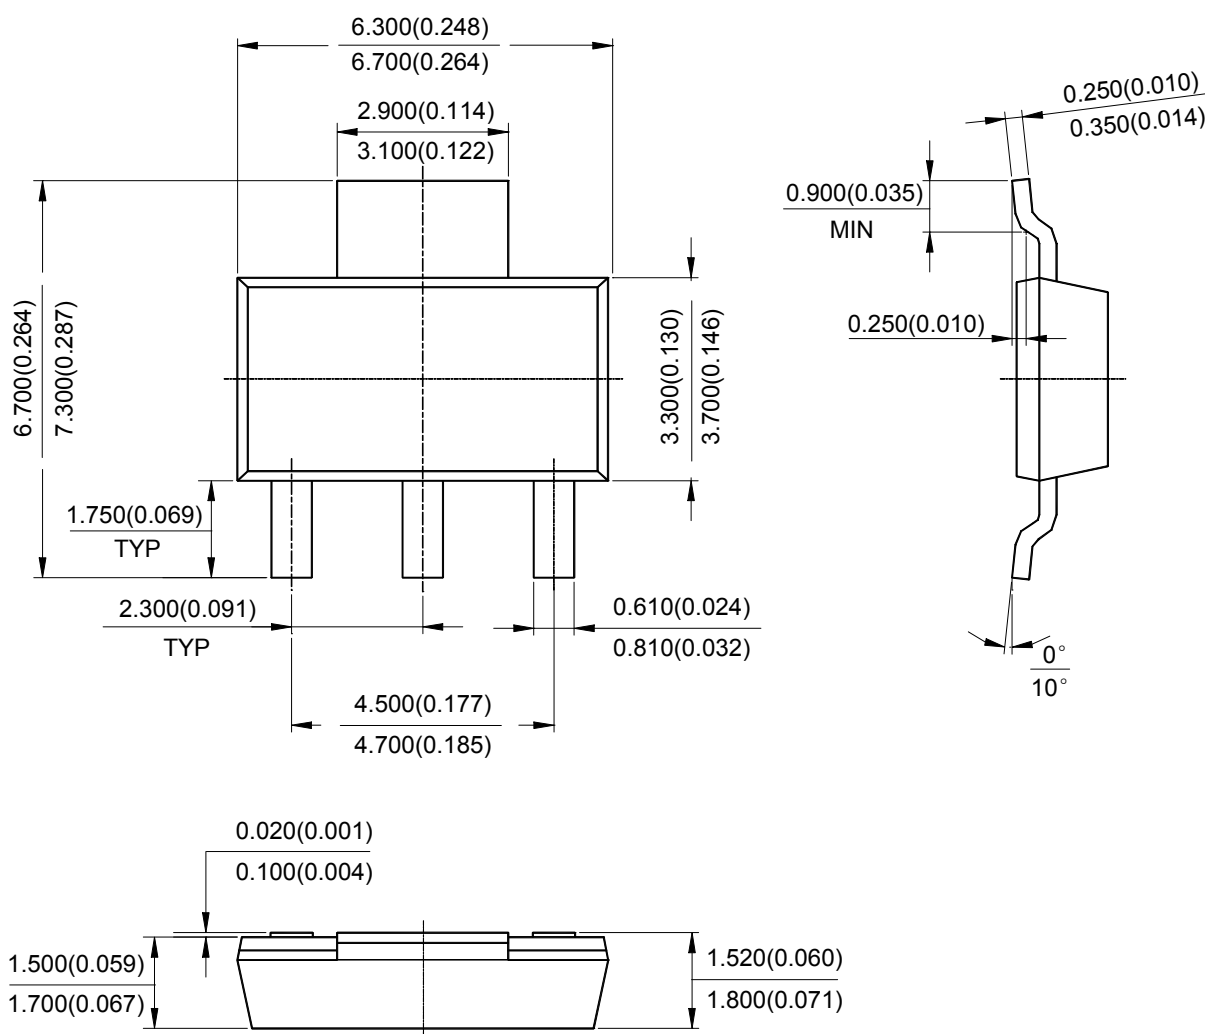



Data Sheet




### 3-TERMINAL POSITIVE LINEAR REGULATOR

**AZ78LXX**

#### Mechanical Dimensions (Continued)

**SOT-89**

**Unit: mm(inch)**

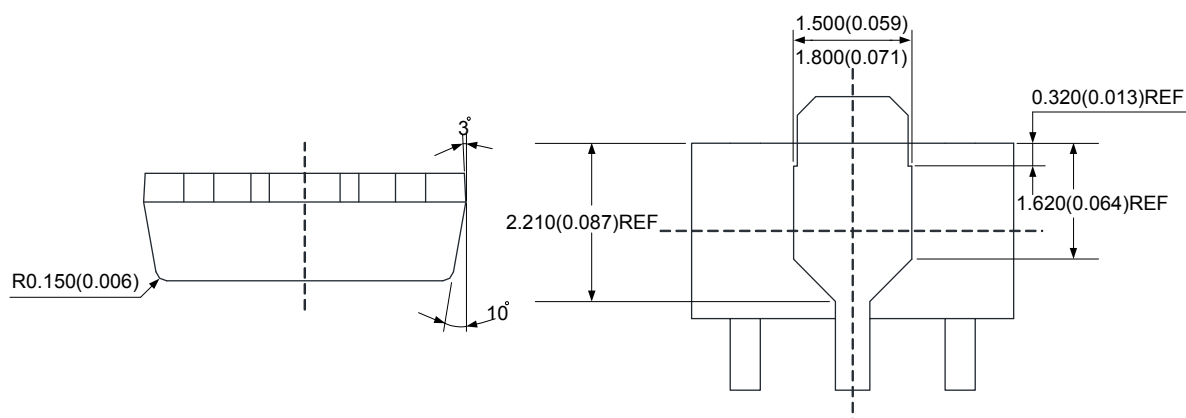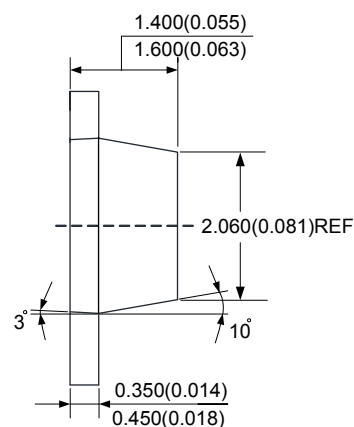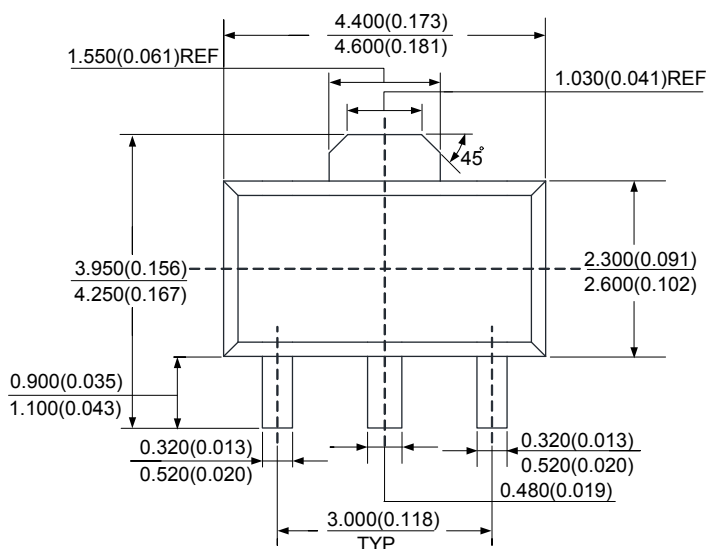



**BCD Semiconductor Manufacturing Limited**

<http://www.bcdsemi.com>

**IMPORTANT NOTICE**

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

---

**MAIN SITE**

**- Headquarters**

**BCD Semiconductor Manufacturing Limited**

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China  
Tel: +86-21-24162266, Fax: +86-21-24162277

**- Wafer Fab**

**Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.**

800 Yi Shan Road, Shanghai 200233, China  
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

**REGIONAL SALES OFFICE**

**Shenzhen Office**

**Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office**

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave.1.S., Nanshan District, Shenzhen, China  
Tel: +86-755-8826 7951  
Fax: +86-755-8826 7865

**Taiwan Office**

**BCD Semiconductor (Taiwan) Company Limited**

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan  
Tel: +886-2-2656 2808  
Fax: +886-2-2656 2806

**USA Office**

**BCD Semiconductor Corp.**

30920 Huntwood Ave. Hayward, CA 94544, USA  
Tel : +1-510-324-2988  
Fax: +1-510-324-2788