

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0423771341](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

10		
NO. CKTS	DIM. A	DIM. B
2	508	254
3	200	200
4	1076	762
5	716	508
6	200	200
7	1076	1076
8	1076	1076
9	200	200
10	2288	2032
11	2540	2288
12	1000	1000
13	2540	2540
14	1000	1000
15	3302	3048
16	1300	1300
17	3048	2794
18	3556	3302
19	4064	3810
20	3810	3556
21	1920	1400
22	4064	3810
23	4572	4318
24	1300	1300
25	4826	4572
26	1900	1800
27	5080	4826
28	2000	2000
29	5588	5334
30	2000	2000
31	5888	5588
32	2000	2000
33	6096	5842
34	2400	2300
35	6350	6096
36	2500	2400
37	6604	6350
38	2400	2300
39	6858	6604
40	2400	2300
41	7102	6858
42	2800	2700
43	7366	7102
44	2800	2800
45	7620	7366
46	3000	2900
47	7874	7620
48	3000	2900
49	8128	7874
50	3000	2900
51	8382	8128
52	3300	3200
53	8636	8382
54	3300	3200
55	8890	8636
56	3300	3200
57	9144	8890



- NOTES:
1. MATERIAL: GLASS FILLED NYLON
UL94-V-0, COLOR: BLACK
 2. FINISH
(154) OVERALL TIN: 0.00254/0.00100 MIN. OVER
NICKEL: 0.00127/0.00050 MIN.
(208) SELECT GOLD: 0.00038/0.00005 MIN.
SELECT TIN: 0.00254/0.00100 MIN.
WITH OVERALL NICKEL UNDERPLATE: 0.00127/0.00050 MIN.
 3. (228) SELECT GOLD: 0.00076/0.00030 MIN.
SELECT TIN: 0.00254/0.00100 MIN.
WITH OVERALL NICKEL UNDERPLATE: 0.00127/0.00050 MIN.
 3. PRODUCT SPECIFICATION: P-5
 4. PACKAGING INFORMATION: SEE TABLES
 5. SOLDERABILITY PER SMES-152.
 6. PIN PUSH OUT FORCE: 3 LBS. MIN.
 7. KINK OR PIN DETENTION NOT REQUIRED FOR 2 CIRCUIT PARTS.
HOLE SIZE MAY NEED TO BE ADJUSTED FOR 2 CIRCUIT PARTS
WITH KINK OPTION FOR PROPER INSERTION INTO THE PCB.
SEE SMES-42003 FOR ADDITIONAL INFORMATION
ON THE PIN DETENTION AND PLACEMENT.
 8. HEADERS ARE NOT STACKABLE ON 254/100 CENTERS.
 9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF
COSMETIC SPECIFICATION PS-45499-002.
 10. PIN DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.
DIMENSIONS APPLY PRIOR TO PLATING OF ASSEMBLY.

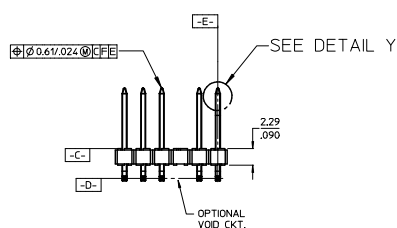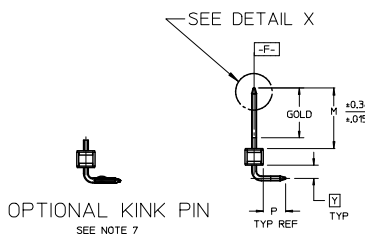

CORRECT DIMENSION		DESCRIPTION		SHEET 1 REV	
EC NO. UCP205-1410	2014/10/20	DRW:HK IPFER	2014/10/20		
CHK:CK ANGVEN	2014/10/20	APPR:FSM TH	2014/10/31		
REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	
				MM/IN	
	$\nabla=0$	mm	INCH	DRAWN BY	DATE
	$\nabla=0$	4 PLACES $\pm$ ---	$\pm$ ---	JSCHAFER	11/24/03
	$\nabla=0$	3 PLACES $\pm$ ---	$\pm$.010	CHECKED BY	DATE
	$\nabla=0$	2 PLACES $\pm$.025	$\pm$.015	SAMIEC	11/24/03
	$\nabla=0$	1 PLACE $\pm$.038	$\pm$ ---	APPROVED BY	DATE
	$\nabla=0$	0 PLACE $\pm$	$\pm$	MARGULIS	11/24/03
		ANGULAR $\pm 1/2^\circ$		MATERIAL NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART	
				SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
				DOCUMENT NO.	
				SD-42377-001	
				SHEET NO. 1 OF *	