

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)
[DV10-250-Q](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

PART NUMBER	TAB SIZE	WIRE RANGE AWG	COLOR	MAX. INSUL.	DIMENSIONS in.		
					A ±.03	B ±.01	C ±.01
DV10-250	.250 X .032	12-10	YELLOW	.229 (5.82)	1.03 (26.16)	.30 (7.62)	.13 (3.30)

NOTES:

- UL RECOGNIZED AND CSA CERTIFIED FOR:
A. 600V MAX VOLTAGE RATING
B. 194°F (90°C) MAX TEMP RATING
C. STRANDED COPPER WIRE ONLY
D. 6-12 LBS INITIAL INSERTION/WITHDRAWAL FORCE
E. 24 AMP. MAX.
- MATERIAL:
A. STAMPING-BRASS, TIN PLATED
B. HOUSING-VINYL
C. SLEEVE-BRASS, TIN PLATED
- DIMENSIONS IN BRACKETS ARE IN mm OR mm²
- INSTALLATION TOOLS: UL/CSA: CT-550, CT-1551, CT-1550
PANDUIT RECOMMENDED: CT-100, CT-160, CT-260, CT-460
- PACKAGE QTY: -L=50
-D=500
- WIRE STRIP LENGTH: 9/32 ±1/32" (7.1 ±.8)

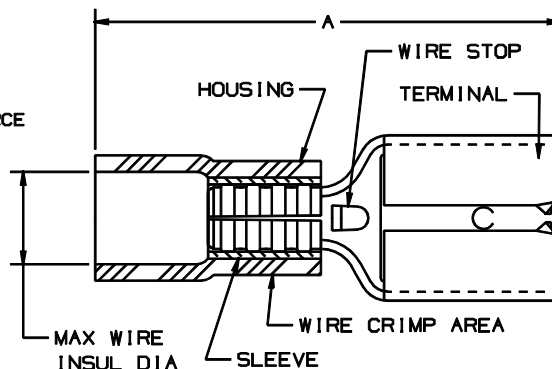

CERTIFIED
LR31212



RECOGNIZED
E78522

A41199_04

04	1/01	KMD		CAD FILE SPEC. WAS N41199AA_PCD_03				PANDUIT CORP.	TINLEY PARK, ILLINOIS
03	5/99	JKD		ADDED CT-1551 & CT-1550 TOOLS	07642				
02	3/95	MS	RLS	UPDATED NOTES AND DIMENSIONS	03048	LA	JB	FEMALE DISCONNECTS, VINYL INSULATED .250 X .032	
01	1/89	SM	DM	REVISED DET TO MATCH STAMPING		LA	JB		
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY FES	CHK'D RLS
								SCALE NONE	DRAWING NO. A41199