

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)

[DV18-250B-L](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

PART NUMBER		TAB SIZE	WIRE RANGE AWG	MAX. INSUL. DIA.	DIMENSIONS in.			HOUSING COLOR
PREFIX	PK				A ±.03	B ±.01	C ±.01	
DV18-250B	-C -M -MY	.250 X .032 (6,3 X 0,8)	22-18 (0,5-1,0)	.150 (3,8)	.81 (20,6)	.29 (7,4)	.12 (3,0)	RED
*DV14-250B	-C -M	.250 X .032 (6,3 X 0,8)	18-14 (1,5-2,5)	.170 (4,3)	.81 (20,6)	.29 (7,4)	.12 (3,0)	BLUE



NOTES:

- UL LISTED, UL RECOGNIZED (DV14-250B ONLY),
CSA CERTIFIED FOR:
A. 600V. MAX. VOLTAGE RATING
B. STRANDED COPPER WIRE ONLY
C. 221° F (105° C) MAX. TEMP. RATING
- MATERIAL:
A. STAMPING - .016" (0.41) THK BRASS,
TIN PLATED
B. HOUSING - VINYL
- PACKAGE QTY: STD. PKG. -C=100
BULK PKG. -M=1000, -MY=1000
- INITIAL INSERTION FORCE - 12 LB. (53 N.) MAX
INITIAL WITHDRAWAL FORCE - 12 LB. (53 N.) MAX
6 LB. (27 N.) MIN
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOLS:
A. UL LISTED AND CSA CERTIFIED: CT-520, CT-1525
B. UL RECOGNIZED: CT-520, CT-1525
- WIRE STRIP LENGTH: 1/4 ^{+1/32}₋₀ (6.3 ^{+0.8}₋₀)

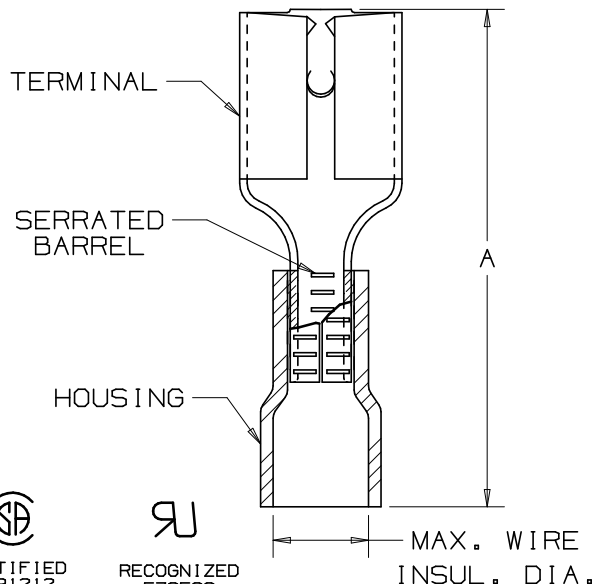

09	6/06	DAW	DAW	REMOVED MAX. AMPERAGE NOTE	TR00134				A41307_09
08	5/05	JHNU		ADDED PACKAGING CODE "MY" TO DRAWING.					
07	7/03	KLFU	SKB	UPDATED DRAWING	12453	TRO	SKB		
06	5/99	JKD	SKB	ADDED CT-1525 TOOL	07634	TRO	JCJ		
05	10/94	MS	RS	UPDATED NOTES AND DIMENSIONS	02531	JM	LA		
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	APP	DRAWN BY DAW	CHK'D LA
								SCALE NONE	DRAWING NO. A41307

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

FEMALE DISCONNECT, VINYL INSULATED
(.250 SERIES)