

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)

[DVF14-187-C](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER		TAB. CODE	WIRE RANGE AWG	HOUSING COLOR	DIMENSIONS in			
PREFIX	PK				MAX DIA	A ±.03	B ±.01	C ±.01
DVF18-187	-C -M -MY	.187 × .032 (4.8 × 0.8)	22-18	RED	.137 (3.48)	.76 (19.3)	.23 (5.8)	.10 (2.5)
DVF18-188	-C -M -MY	.187 × .020 (4.8 × 0.5)	22-18	RED	.137 (3.48)	.76 (19.3)	.23 (5.8)	.10 (2.5)
DVF18-205	-C -M	.187/.205 × .032 (4.8/5.2 × 0.8)	22-18	RED	.137 (3.48)	.76 (19.3)	.25 (6.4)	.12 (3.0)
DVF18-206	-C -M	.187/.205 × .020 (4.8/5.2 × 0.5)	22-18	RED	.137 (3.48)	.76 (19.3)	.25 (6.4)	.12 (3.0)
DVF18-250	-C -M -MY	.250 × .032 (6.3 × 0.8)	22-18	RED	.137 (3.48)	.81 (20.6)	.29 (7.4)	.12 (3.0)
DVF14-187	-C -M	.187 × .032 (4.8 × 0.8)	16-14	BLUE	.162 (4.11)	.76 (19.3)	.23 (5.8)	.10 (2.5)
DVF14-188	-C -M	.187 × .020 (4.8 × 0.5)	16-14	BLUE	.162 (4.11)	.76 (19.3)	.23 (5.8)	.10 (2.5)
DVF14-205	-C -M	.187/.205 × .032 (4.8/5.2 × 0.8)	16-14	BLUE	.162 (4.11)	.76 (19.3)	.25 (6.4)	.12 (3.0)
DVF14-206	-C -M	.187/.205 × .020 (4.8/5.2 × 0.5)	16-14	BLUE	.162 (4.11)	.76 (19.3)	.25 (6.4)	.12 (3.0)
DVF14-250	-C -M	.250 × .032 (6.3 × 0.8)	16-14	BLUE	.162 (4.11)	.81 (20.6)	.29 (7.4)	.12 (3.0)

NOTES:

1. USED FOR:
 - A. 300V MAX. VOLTAGE RATING
 - B. STRANDED COPPER WIRE ONLY
 - C. 194°F (90°C) MAX. TEMP. RATING OF INSUL. MATERIAL.
2. MATERIAL:
 - A. STAMPING: .016 (0.41) THK BRASS, TIN PLATED
 - B. SLEEVE: .016 (0.41) THK. BRASS, TIN PLATED
 - C. HOUSING: VINYL
3. INSTALLATION TOOLS: CT-500, CT-1550, CT-1551, CT-550,
CT-2400 (CT-2455CH), CT-600 (CT-500CH
OR CT-550CH)
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. PACKAGE QUANTITY: -C = 100 PCS.
-M = 1000 PCS., -MY = 1000 PCS.
6. WIRE STRIP LENGTH: $9/32^{+1/32}_{-0}$ (7.1 $^{+0.8}_{-0}$)

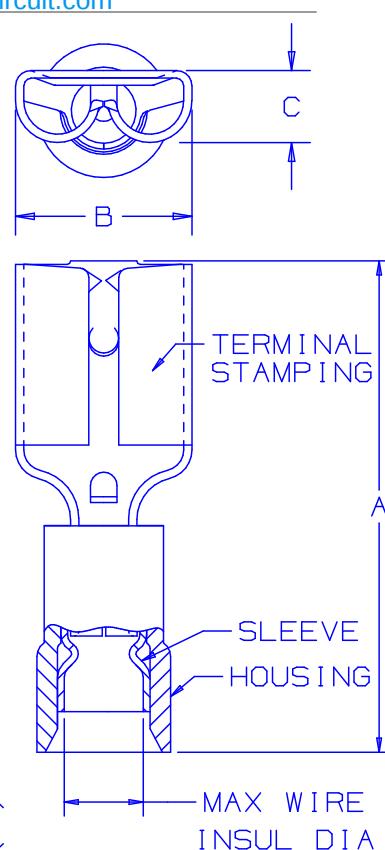

LISTED CERTIFIED
20H3

A41635_04

04	5/05	JHNU		ADDED PACKAGING CODE "MY" TO DRAWING.						 PANDUIT CORP TINLEY PARK, ILLINOIS			
03	11/04	KLFUSKB		ADDED GEOMETRY			SKB	TRO					
02	6/97	JAMB	RLS	MAX. TEMP. RATING OF INSULATION MATERIAL WAS 221°F (105°C)	05958		LA	DBH					
01	5/97	JAMB	RLS	ADDED " LISTED 20H3 "AND " CERTIFIED " TO EXISTING UL AND CSA SYMBOLS	05813		LA	DBH					
REV	DATE	BY	CHK	DESCRIPTION	ECN #	QA	CUST	PM	SUP	DRAWN BY TSMA	CHK'D RLS	SCALE NONE	DRAWING NO. A41635