

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Souriau Connection Technology](#)
[RBD20-1](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



RB Modules

Applications

Grounding and wiring integration devices for commercial/military aircraft.

Standards

Characteristics

Material


- Ground block body : aluminum alloy
- Feed back modules body : polyphenylene sulfide (PPS)
- Ground track body : PPS
- Ground block cap and insert : PPS
- Grommet and ground track strain : silicone rubber
- Relief grommet contact : copper alloy

Protection

- Contact gold (1.27µm) over nickel (1,91 µm)

Mechanical

- Magnetic permeability : materials do not exhibit a relative magnetic permeability of greater than 2, in accordance with MIL-T-81714, para 4.6.15

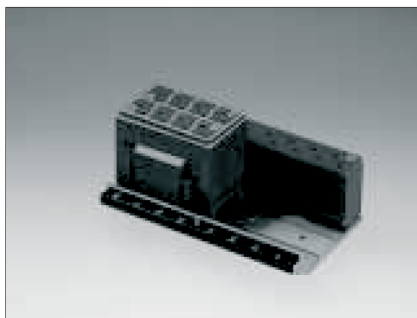

- Contact retention : size 16-20 : 88,9 N
size 14-16 : 112,2 N
- Probe damage : in accordance with MIL-T-81714 para 4.6.2
- Endurance : 100 cycles of mating and unmating

Electrical

- Contact resistance : size 16-20 : 9 mΩ
size 14-16 : 5 mΩ
- Withstanding voltage : sea level : 1500 VRms in accordance with MIL-T 81714
Altitude : 600 VRms in accordance with MIL-T 81714
- Insulation resistance : 5000 MΩ (feedback modules only)
- Insulation resistance : 50 MΩ after (elevated temperature) 1000 hours at 150°C feedback modules only

Description

- RB series meet the electrical, mechanical and environmental performances criteria of MIL-J-81714.
- The system provides a large number of ground terminations within close proximity to signal wires («HERF» requirements).
- Modules available in five buss configurations and designed to accommodate # 16 and # 20 AWG cables terminated with M39029 contacts.
- Program switch module contains 2, 12 positions single pole, single throw DIP switches in a sealed compartment that is accessed by removing captured sealing plugs.
- Other switches such as SEDT, DPBT, DPST and 4PST can also be accommodate.

Climatical

- Resistance to salt spray
humidity
vibration
shock
thermal shock
temperature : 1000 hours at 150°C
- in accordance with MIL-T-81714

Ordering information

Ground & Mounting track, ground block, and feedback module

FCI Burndy Part number	Boeing Part number	Description
R BGB20-777	S280W555-1	Ground block module - 16 x 20 AWG
R BGB16-777	S280W555-2	Ground block module - 12 x 16 AWG
R BTB20-2	S280W555-102	Terminal feedback module - 2 x 8 bus - 20 AWG
R BTB20-4	S280W555-104	Terminal feedback module - 4 x 4 bus - 20 AWG
R BTB20-8	S280W555-108	Terminal feedback module - 8 x 2 bus - 20 AWG
R BTB16-3	S280W555-203	Terminal feedback module - 3 x 4 bus - 16 AWG
R BTB16-6	S280W555-206	Terminal feedback module - 6 x 2 bus - 16 AWG
R BGT2W	S280W555-502	Terminal module ground track - 2.00 in.
R BGT4W	S280W555-504	Terminal module ground track - 4.00 in.
R BGT6W	S280W555-506	Terminal module ground track - 6.00 in.
R BGT10W	S280W555-510	Terminal module ground track - 10.00 in.
R BGT14W	S280W555-514	Terminal module ground track - 14.00 in.
R BGT16W	S280W555-516	Terminal module ground track - 16.00 in.
R BGT22W	S280W555-522	Terminal module ground track - 22.00 in.
R BGT26W	S280W555-526	Terminal module ground track - 26.00 in.
R BMT2	S280W555-602	Terminal module ground track - 2.00 in.
R BMT4	S280W555-604	Terminal module ground track - 4.00 in.
R BMT6	S280W555-606	Terminal module ground track - 6.00 in.
R BMT10	S280W555-610	Terminal module ground track - 10.00 in.
R BMT14	S280W555-614	Terminal module ground track - 14.00 in.
R BMT16	S280W555-616	Terminal module ground track - 16.00 in.
R BMT22	S280W555-622	Terminal module ground track - 22.00 in.
R BMT26	S280W555-626	Terminal module ground track - 26.00 in.
R BD20-1	S280W555-751	Terminal diode module - JANTX1N6818
R BD20-3	S280W555-753	Terminal diode module - JANTX1N5553
R BR20-2	S280W555-702	Terminal resistor module - RLR07C4301 FR
R BR20-3	S280W555-703	Terminal resistor module - RLR07C1202 FR
R BR20-4	S280W555-704	Terminal resistor module - RLR07C4992 FR
R BR20-5	S280W555-705	Terminal resistor module - Mat disp brightness control
R BM20M-1DJ5		M39029/1-101 pin contact - size 16-20
R BM18M-1DJ5		M39029/1 special pin contact - size 16-18
R BM16V-1DJ5		M39029/1-102 pin contact - size 14-16
R BM12Z-1DJ5		M39039/1-103 pin contact - size 12-12




RB Modules

Rack & panel and right angle mounting ground blocks and program switch module


FCI Burndy Part number	Boeing Part number	Description
RBGP16-1 RBGP48-1 RBGP104-1		Rack and panel mounting ground block Rack and panel mounting ground block Rack and panel mounting ground block
RBGS16-1 RBGS32-1	S280W555-401 S280W555-402	Right angle mounting ground shelf strip Right angle mounting ground shelf strip
RBDSC-1		Program switch module

Ground block assembly

P/N RBGB 20-777


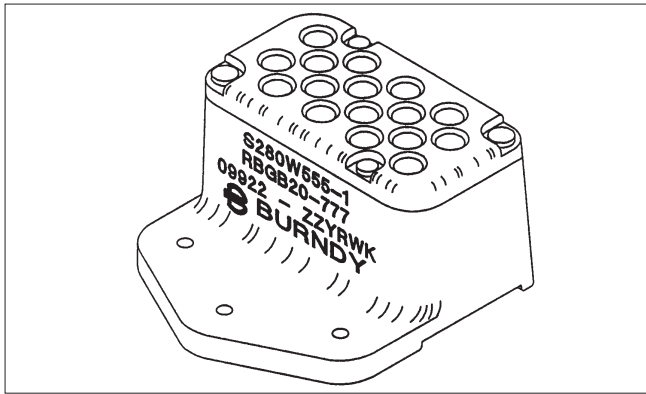


P/N RBG 16-777

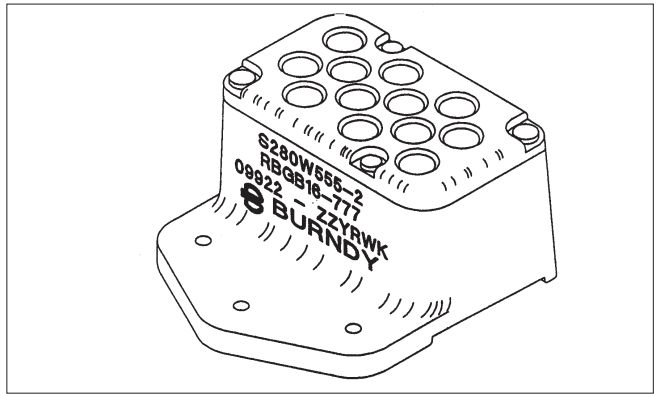


Feedback module

P/N RBTB 20-4

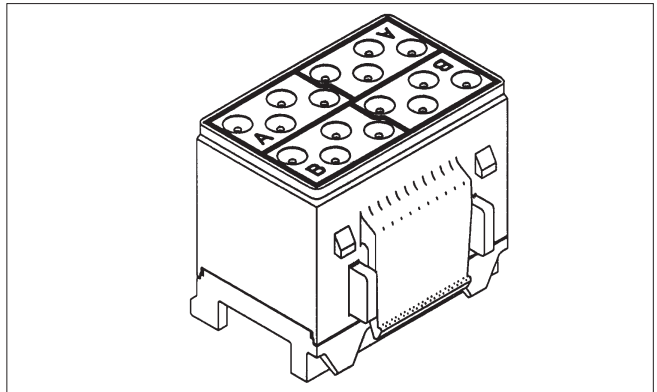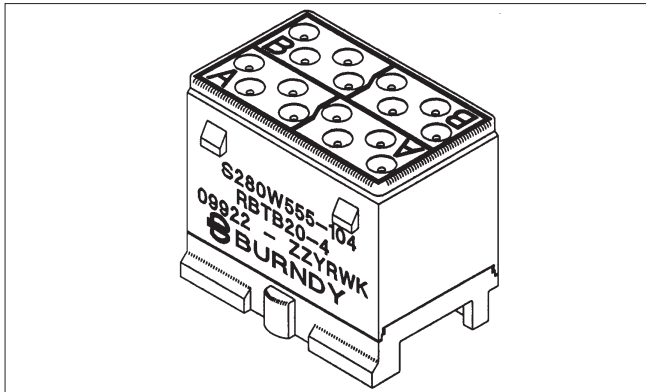


Grounding track assembly

P/N RBGT 2

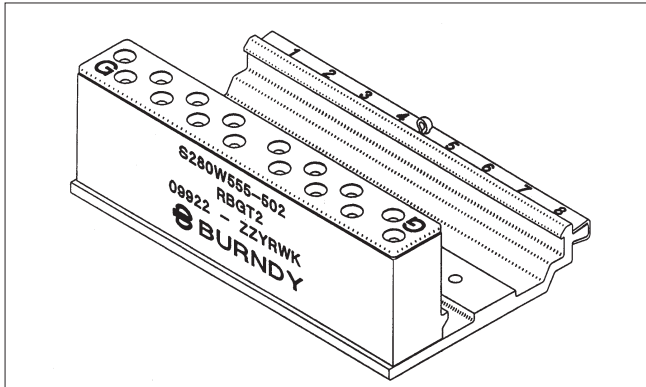

Mounting track assembly


RBM T 2

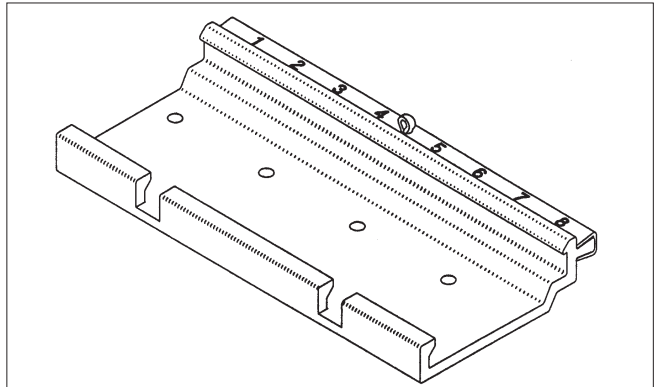




RB Modules


Feedback module mounted in grounding track
RBG T2 / RBT B 20 - 4

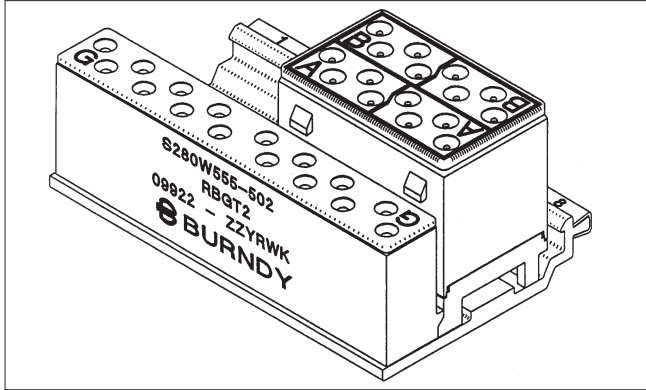


Feedback module mounted in mounting track
RBM T 2 / RB T B 20 - 4

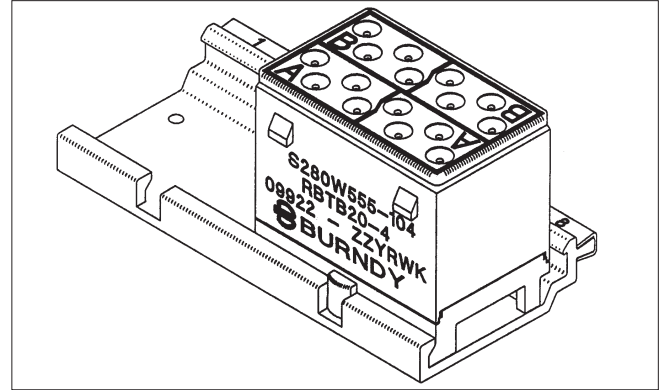

Diode / resistor module assembly
RBD 20 - 3

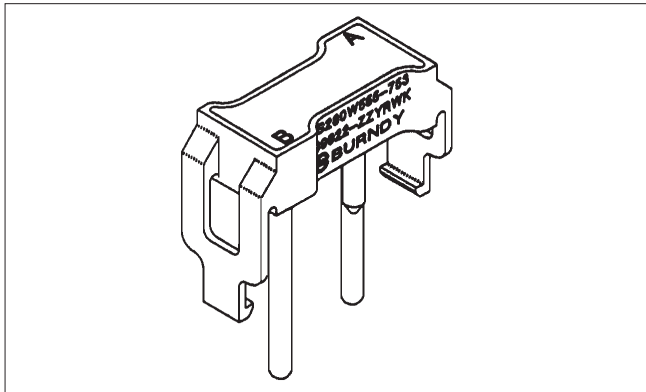

Feedback module mounted in track with resistor module
RBM T 2 / RBR 20 - 3 / RBT B 20 - 4

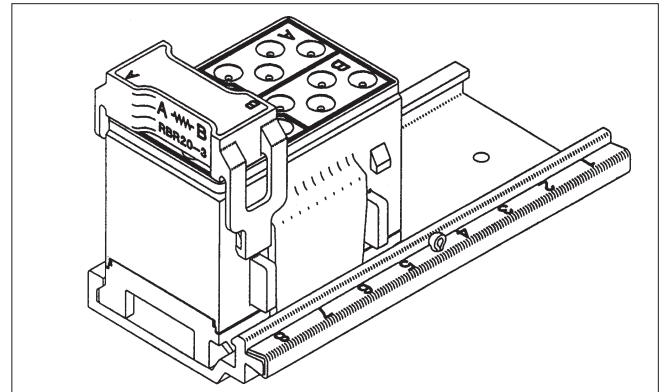

Program switch module
RBDSC - 1

