

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


HellermannTyton 181-00263

For any questions, you can email us directly: <u>sales@integrated-circuit.com</u>



HellermannTyton

181-00263

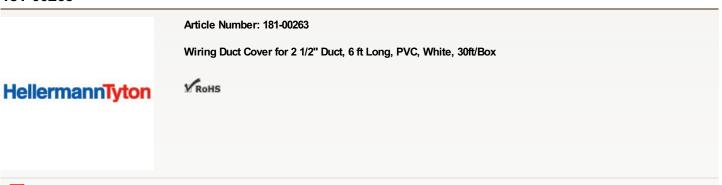

Base Data

Download spec sheet

Local Order Number	181-00263
Туре	TC2.5
Color	White (WH)
Features and Benefits	 A temporary film is applied to the covers to protect against scratches and is writable for identification during installation. Cover is flush with the side of the duct for increased wire capacity and allows for tight, side by side duct placement. Covers are provided with a non-slip lining, which insures the covers remain in place during vibration, yet they easily snap on and off. (Covers to be purchased separately)
Product Description	HellermannTyton's Pro-Duct wiring duct covers are sold separately and interchangeable among the 3 styles of duct (solid, slotted and high density). Manufactured from high impact, rigid PVC, Pro-Duct covers come in standard colors of white, gray and black. Wiring duct covers are available in 6 foot lengths.
Short Description	Wiring Duct Cover for 2 1/2" Duct, 6 ft Long, PVC, White, 30ft/Box

Product Dimensions

Length L (Imperial)	6.0 ft
Length L (Metric)	1.83 m
Width W (Imperial)	2.5 "
Width W (Metric)	63.5 mm

Logistics and Packaging

Quantity Per	box
Package Quantity	30.0 ft
Package Quantity (Metric)	9.1 m
Carton Quantity	120.0 ft

Material and Specifications

Material	Polyvinylchloride (PVC)
Material Shortcut	PVC
Flammability	self-extinguishing
Operating Temperature	+122°F (+50°C)
ROHS Compliant	Yes
UL Listed (US and Canada)	No
UL Recognized (US)	Yes
UL Recognized (US and Canada)	No



© HellermannTyton 2015