

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Visual Communications Company, LLC](#)

[CLP_129_BLK](#)




For any questions, you can email us directly:

sales@integrated-circuit.com




- NOTES:
1. MOUNTING: Mounts in a $\varnothing .250 \pm .002$ [$\varnothing 6.35\text{mm} \pm .05$] panel hole on .375 [9.5mm] centers. Panel thickness .031 [.8 mm] to .125 [3.18mm]. Panel hole should be deburred, but not chamfered.
 2. ASSEMBLY: Insert clip mount through panel hole, insert LED into clip mount, slide spacer over clip mount.
 3. U.S. & Foreign Pat. Issued & Pend.

REVISIONS				
ECN#	REV.	DESCRIPTION	DATE	INITIALS
	001	REVISED PER ECR111009AZ01	6-20-10	SMU

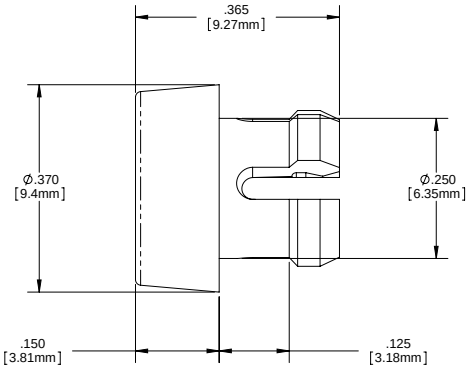


SPACER
(ORDER SEPARATELY)



SPC 125

ORDERING CODE : **CLP 129 BLK**



ASSEMBLY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		MATERIAL POLYCARBONATE , UL 94-V2, BLACK		VISUAL COMMUNICATIONS COMPANY, INC. 1361 Broadway Boulevard, Suite 201, San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccite.com	
ANGLES 1° = .0175 5° = .0872 10° = .1736 15° = .2618 30° = .5176 45° = .7660 60° = 1.0000 75° = 1.3001 90° = 1.5708	DECIMALS 1/16 = .0625 1/8 = .1250 3/16 = .1875 1/4 = .2500 5/16 = .3125 3/8 = .3750 7/8 = .8750 1 = 1.0000	FINISH		TITLE: CLIPLITE® CLP 129 MOUNT	
THIRD ANGLE PROJECTION		APPROVAL		DATE	
DRAWN: SMU		CHECKED: DZ		6-20-10	
DO NOT SCALE DRAWING		SIZE		DWG. NO.	
		B		CLP 129 BLK	
		SCALE: 1:1		REV	
				001	
				SHEET 1 OF 1	