

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)

[PNF10-10R-D](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




Distributor of Panduit: Excellent Integrated System Limited
Datasheet of PNF10-10R-D - TERM RING NYL 12-10AWG #10

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MILITARY PART NO. AND CLASS	STUD SIZE	DIMENSIONS in.				
			A $\pm .04$ (1.02)	W $\pm .01$ (.25)	C MIN	M $\pm .04$ (1.02)	H $\pm .01$ (.25)
PNF10-6R	MS25036-111 CLASS 1 & 2	#6	1.05 (26.57)	.38 (9.53)	.31 (7.85)	.86 (21.82)	.15 (3.73)
PNF10-8R	MS25036-156 CLASS 1 & 2	#8	1.05 (26.57)	.38 (9.53)	.31 (7.85)	.86 (21.82)	.17 (4.39)
PNF10-10R	MS25036-112 CLASS 1 & 2	#10	1.05 (26.57)	.38 (9.53)	.31 (7.85)	.86 (21.82)	.20 (5.03)
PNF10-14R	MS25036-157 CLASS 1 & 2	1/4"	1.19 (30.30)	.52 (13.30)	.38 (9.65)	.93 (23.70)	.27 (6.79)
PNF10-56R	MS25036-113 CLASS 1 & 2	5/16"	1.19 (30.30)	.52 (13.30)	.38 (9.65)	.93 (23.70)	.33 (8.39)
PNF10-38R	MS25036-114 CLASS 1 & 2	3/8"	1.27 (32.33)	.58 (14.73)	.43 (10.87)	.98 (24.97)	.39 (9.97)

NOTES:

- 1) UL LISTED AND CSA CERTIFIED FOR:
A. 600V. MAX. BLDG. WIRE
(1000V. MAX. IN SIGNS, FIXTURES & LUMINARIES)
B. 221°F. (105°C) MAX. TEMP. RATING
C. #12-10 AWG SOLID OR STRANDED COPPER WIRE WITH
THE CT-2500 INSTALLATION TOOL AND CT-2550CH
CRIMP HEAD
D. #12-10 AWG STRANDED AND #12 AWG SOLID COPPER
WIRE WITH THE CT-1550 AND CT-1551 INST. TOOLS
E. #12-10 AWG SOLID OR STRANDED COPPER WIRE WITH
THE CT-100A INSTALLATION TOOL.
F. MIL CLASS 2 WITH THE CT-460 INSTALLATION TOOL
- 2) MATERIAL:
A. STAMPING- .04" (1.02) THK. COPPER, TIN PLATED
B. HOUSING- NYLON, YELLOW
C. SLEEVE- BRASS, TIN PLATED
- 3) WIRE STRIP LENGTH- 9/32" +1/32, -0 (7.1, +.8, -0)
- 4) SEE www.panduit.com FOR PART NUMBER SUFFIX
DESIGNATION FOR PACKAGE SIZE.
- 5) DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS

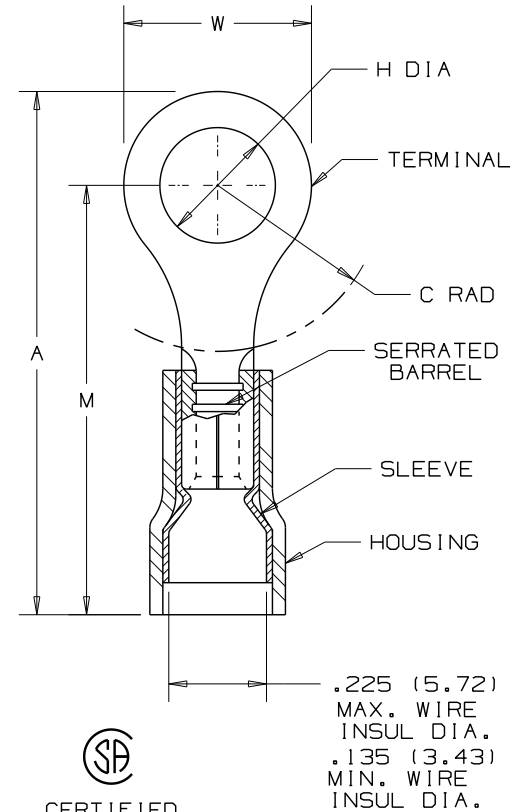

LISTED
587H
E52164



CERTIFIED
LR31212

MAX. WIRE
INSUL DIA.
.225 (5.72)

MIN. WIRE
INSUL DIA.
.135 (3.43)

N41277BA/08

						PANDUIT CORP. TINLEY PARK, ILLINOIS					
08	12/16/11	FS	Obsolete installation tools removed, UL information clarified, general dimensional updates.					#12-10 NYLON INSULATED FUNNELED WIRE ENTRY RING TONGUE, .225 (5.72) MAX. WIRE INSULATION DIAMETER			
07	5/11	SRB	ADDED note #4								
REV	DATE	BY	DESCRIPTION			CUST	PM	DRAWN BY	CHK'D	SCALE	DRAWING NO.
								DAW	RLS	NONE	A41277