

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Panduit](#)

[PRST40SC-D30](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

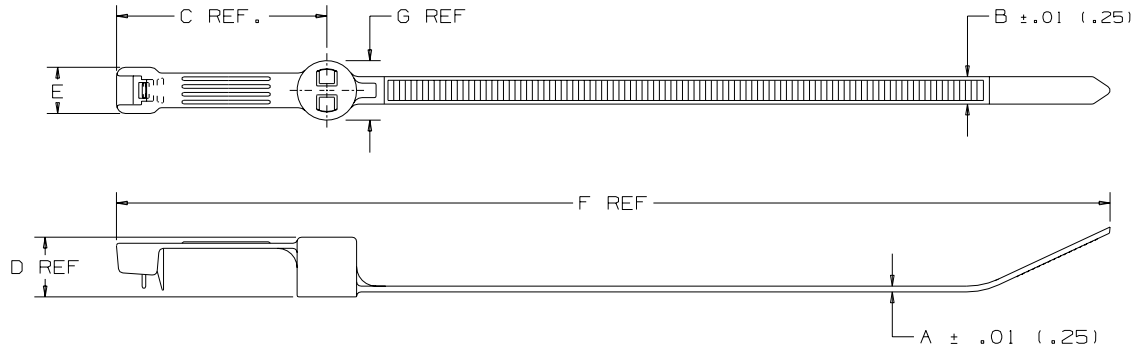

PANDUIT * PART NO.	BUNDLE DIA.		A	B	C	D	E	F	G	RECOMMENDED STUD SIZE		MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT lbs (g)/100 pcs
	MIN. in (mm)	MAX. in (mm)								STUD	LENGTH			
PRST40SC	.24 (6)	1.57 (40)	.05 (1.27)	.19 (4.8)	1.45 (37)	.41 (10.5)	.32 (8.1)	6.94 (176)	.41 (10.5)	10-24 (5)	.375 (9)	50 (222)	STANDARD	.40 (181)

NOTES:

* SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

										CAD FILENAME/LAYERS				
										DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS				
										PANDUIT				
										CORP. TINLEY PARK, ILLINOIS				
										RELEASABLE STUD MOUNT CABLE TIE				
										PRST40SC				
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±.1 (.25) (.XXX) ±.020 (.51) (.XX) ±.02 (.5) ANGLES ±				
										UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.				
--	-----	---	CHANGED FORMAT FOR CONSISTENCY. REARRANGED DIM. LETTERS, ADDED TOLERANCE			-----	--			DRAWN BY	CDH		MAT'L:	
6	12/8/05	ERW	CORRECTED MIN. LOOP TENSILE METRIC CONVERSION TO (222), WAS (223)			26436	6			DATE	08/13/91		-30 HEAT STABILIZED BLACK	
REV	DATE	BY	CHK	DESCRIPTION			ECN	R	CUST	SUP	CHK'D	HVP		DWG SIZE
														A