

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Advanced Photonix, Inc.](#)  
[PDV-V400](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# PHOTONIC DETECTORS INC.

## Silicon Photodiode, Filter Combination Photovoltaic (photopic response) Type PDV-V400

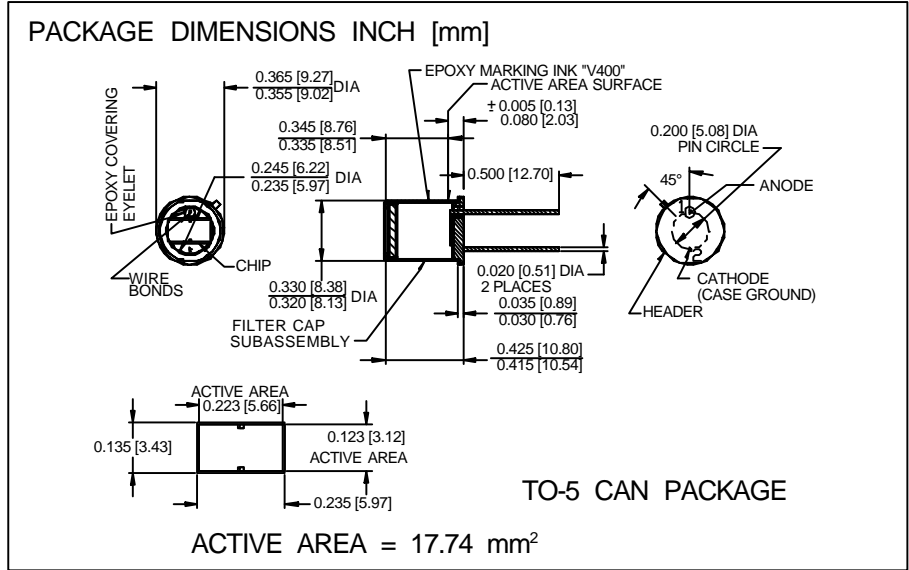

### FEATURES

- Large active area
- High transmission
- Low noise

### DESCRIPTION

The **PDV-V400** is a silicon, PIN planar diffused, photodiode with a photopic response filter. The detector filter combination has a wide bandwidth designed to simulate the spectral response of the human eye.

Packaged in a TO-5 metal can.

### ABSOLUTE MAXIMUM RATING (TA=25°C unless otherwise noted)


SYMBOL	PARAMETER	MIN	MAX	UNITS
V <sub>BR</sub>	Reverse Voltage		100	V
T <sub>STG</sub>	Storage Temperature	-20	+85	°C
T <sub>O</sub>	Operating Temperature Range	-15	+70	°C
T <sub>S</sub>	Soldering Temperature*		+240	°C
I <sub>L</sub>	Light Current		0.5	mA

\*1/16 inch from case for 3 secs max

### APPLICATIONS

- Photometry
- Radiometry
- Film color processing

### SPECTRAL RESPONSE

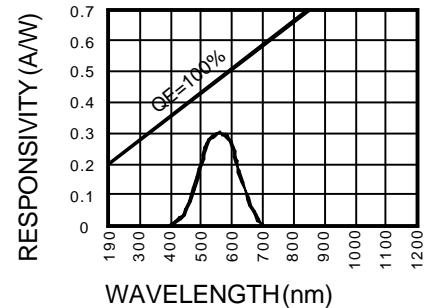

### ELECTRO-OPTICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I <sub>SC</sub>	Short Circuit Current***	H = 100 fc, 2850 K	150	200		μA
I <sub>D</sub>	Dark Current	H = 0, V <sub>R</sub> = 10 mV		10	50	pA
R <sub>SH</sub>	Shunt Resistance	H = 0, V <sub>R</sub> = 10 mV	.20	2		Ω
TC R <sub>SH</sub>	R <sub>SH</sub> Temp. Coefficient	H = 0, V <sub>R</sub> = 10 mV		-8		% / °C
C <sub>J</sub>	Junction Capacitance	H = 0, V <sub>R</sub> = 10 V**		1700		pF
CWL	Center Wavelength	(CWL, λ <sub>o</sub> ) +/- 2 nm		525		nm
HBW	Half Bandwidth	(FWHM)		150		nm
V <sub>BR</sub>	Breakdown Voltage	I = 10 μA	50	75		V
NEP	Noise Equivalent Power	V <sub>R</sub> = 10 mV @ Peak		9x10 <sup>-15</sup>		W/√Hz
tr	Response Time	RL = 1 KΩ V <sub>R</sub> = 10 V		1.0		μS

Information in this technical data sheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice. \*\*f = 1 MHz, \*\*\*without filter

[FORMNO. 100-PDV-V400REV C]