



Distributor of Panduit: Excellent Integrated System Limited

Datasheet of DPF14-250FIM-2K - Connector Quick Connect Tab 14-16 AWG 0.250" (6.35mm)
Crimp

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Panduit](#)

[DPF14-250FIM-2K](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

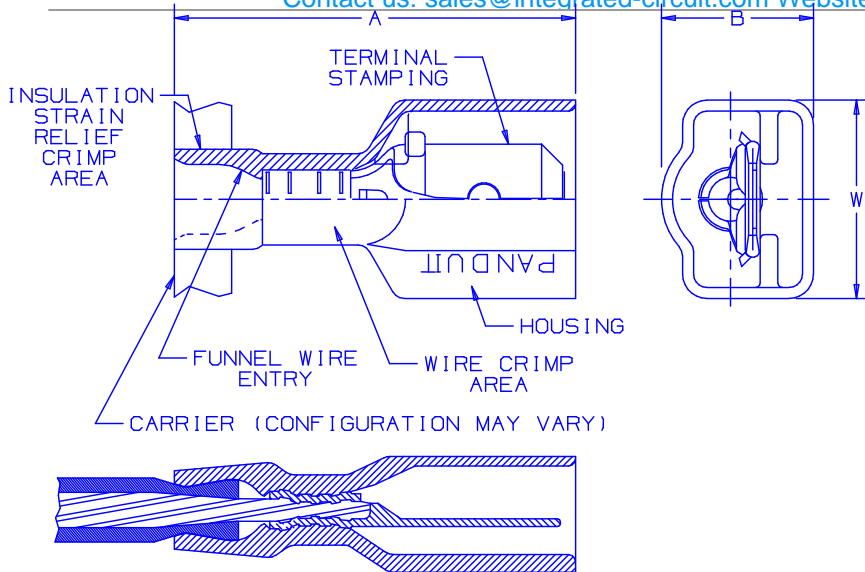

NOTES:

- USED FOR:
A. 600V MAX VOLTAGE RATING
B. 221°F (105°C) MAX TEMP RATING
C. STRANDED COPPER WIRE ONLY
- WIRE STRIP LENGTH: 9/32 ^{+1/32} (7.1 ^{+0.8})
- MATERIAL:
A. STAMPING: NICKEL PLATED BRASS
B. HOUSING : PREMIUM GRADE NYLON FOR SUPERIOR STRAIN RELIEF INSULATION CRIMPING
- PACKAGING: -2K = 2000 PCS CONTINUOUS MOLDED STRIP CARRIER
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm²

SECTION VIEW OF CRIMPED DISCONNECT

| PART NUMBER | | TAB SIZE | WIRE RANGE AWG (mm ²) | COLOR | MAX WIRE INSULATION DIAMETER | MIN WIRE INSULATION DIAMETER | DIMENSIONS in | | | TOOL CHART RECOMMENDED PRESSES CP-861, CP-860 CP-851, CP-862 CA-800/CA9 APPLICATOR DIE INSERTS |
|--------------|-----|-------------------------|-----------------------------------|-------|------------------------------|------------------------------|-------------------------|-------------------------|-------------------------|---|
| PREFIX | PK | | | | | | A ^{±.03} (1.8) | B ^{±.02} (1.5) | W ^{±.02} (1.5) | |
| DPF18-250F1M | -2K | .250 X .032 (6.3 X 0.8) | 22-18 (0.5-1.5) | RED | .133 (3.38) | .060 (1.52) | .90 (22.9) | .29 (7.4) | .41 (10.4) | CD-800-10 CD9-10B |
| DPF14-250F1M | -2K | .250 X .032 (6.3 X 0.8) | 16-14 (1.5-2.5) | BLUE | .156 (3.96) | .090 (2.29) | .90 (22.9) | .29 (7.4) | .41 (10.4) | CD-800-11 CD9-11B |



A41514_05

| | | | | | | | | | | | | | | | | | | | | |
|-----|-------|------|-----|--|-------|----|-----|-----|------|-----|----------|-------|-------|------------|--------|--|--|--|--|--|
| 05 | 7/03 | KLFU | | ADDED INTERNAL SERRATIONS ADDED CA9 TO TOOL CHART | | | | | | | | | | | | | | | | |
| 04 | 1/01 | RM | SKB | FILESPEC WAS N41514AA_PCD_03 | 8933 | | CCH | JAC | | | | | | | | | | | | |
| 03 | 10/98 | JD | | MATERIAL WAS TIN PLATED ADDED CP-862, CA9 | 07845 | | | | | | | | | | | | | | | |
| 02 | 10/96 | TM | RS | UPDATED NOTES AND DIMENSIONS | 05134 | | DH | LA | | | | | | | | | | | | |
| REV | DATE | BY | CHK | DESCRIPTION | ECN | QA | PM | SUP | CUST | APP | DRAWN BY | CHK'D | SCALE | DRAWING NO | | | | | | |
| | | | | | | | | | | | KC | | | | A41514 | | | | | |



TINLEY PARK, ILLINOIS

REELSMART™ DISCOGRIP™
PREMIUM NYLON FULLY INSULATED
MALE DISCONNECT .250 X .032