

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)



[LCAX8-38-L](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| | |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Material | High Conductivity Seamless Copper Tube |
| Plating | Electro-Tin |
| Wire Size | 8 STR/FLEX |
| Wire Type | Stranded Copper: Class B & C, Compact, Class G, H, I, K, M, Locomotive |
| Wire Strip Length | 1/2 in. |
| Stud Size | 3/8 in. |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating | 90 ° C |
| C.S.A Certified Wire Connector | Yes |
| Panduit Color Code on Barrel | RED |
| Panduit Die Index No. on Barrel | P21 |
| Alternate Industry Die Index No. () on Barrel | N/A |

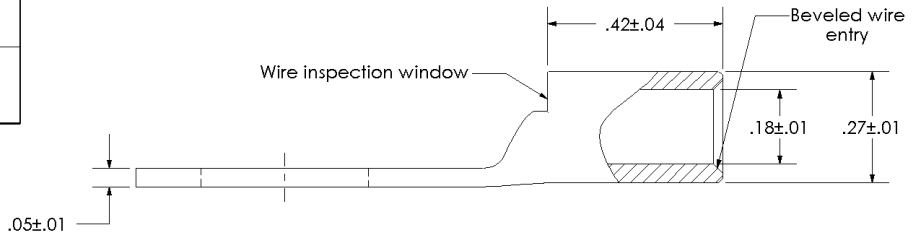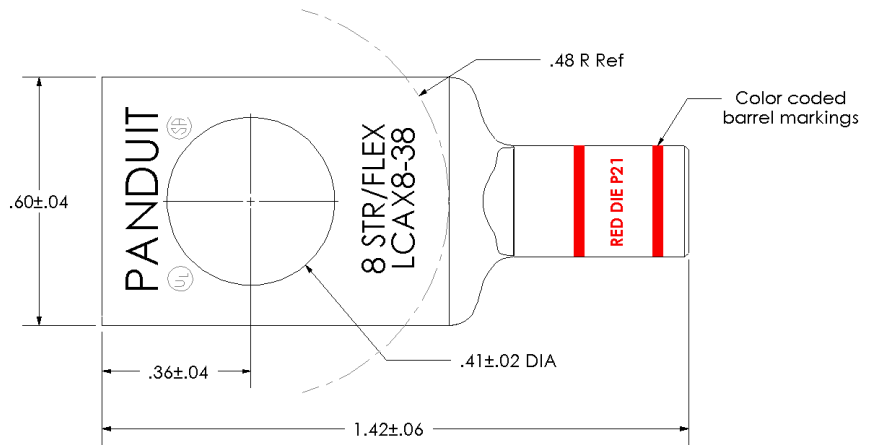

PANDUIT CORP. TINLEY PARK, ILLINOIS

LCAX8-38-L
 Copper Lug - One-Hole, Standard Flex Barrel

| 00 | 6/03 | CJW | SAC | RELEASED | 10850 | SCALE | N/A | DRAWING NO / CAD FILE | LCAX8-38-CUST |
|-----|------|-----|-----|-------------|-------|-------|-----|-----------------------|---------------|
| REV | DATE | BY | CHK | DESCRIPTION | ECN | SCALE | N/A | DRAWING NO / CAD FILE | LCAX8-38-CUST |