

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)

[LCB400-12H-6](#)



For any questions, you can email us directly:

sales@integrated-circuit.com




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	400 kcmil
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Length	2-3/8 in.
Stud Size	1/2 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BLUE
Panduit Die Index No. on Barrel	P76
Alternate Industry Die Index No. () on Barrel	(19)

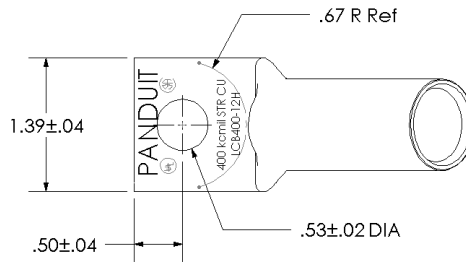

Color coded barrel markings

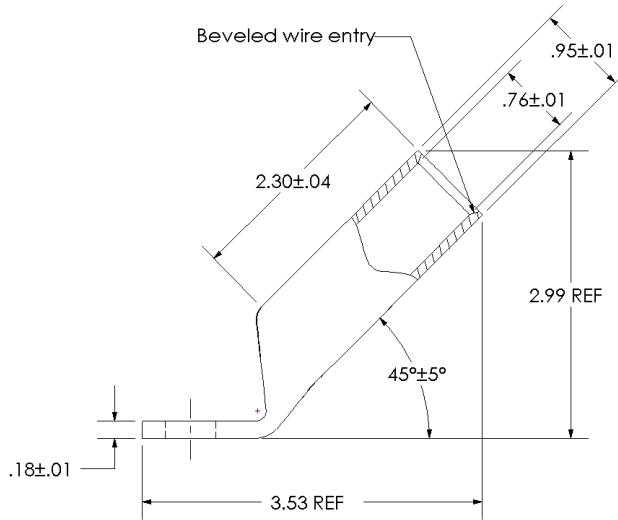

				PANDUIT CORP. TINLEY PARK, ILLINOIS	
				LCB400-12H-6	
00	12/02	SAB	DRL	RELEASED	10328
00	12/02	SAB	DRL	RELEASED	10328
REV	DATE	BY	CHK	DESCRIPTION	ECN
					SCALE N/A
				DRAWING NO / CAD FILE LCB400-12H-CUST	

PANDUIT CORP. TINLEY PARK, ILLINOIS

LCB400-12H-6

Copper Lug - One-Hole, Long Barrel, 45° Angle Tongue

ECN

SCALE N/A

DRAWING NO / CAD FILE

LCB400-12H-CUST