

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)



[LCBX300-38-6](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

|                                                |                                                                                                                                                |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                                       | High Conductivity Seamless Copper Tube                                                                                                         |
| Plating                                        | Electro-Tin                                                                                                                                    |
| Wire Size                                      | 300 STR/FLEX                                                                                                                                   |
| Wire Type                                      | Stranded Copper:<br>Class G, H, I, K, M,<br>Locomotive                                                                                         |
| Wire Strip Length                              | 2-3/8 in.                                                                                                                                      |
| Stud Size                                      | 3/8 in.                                                                                                                                        |
| UL Listed Wire Connector                       | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating                          | 90 ° C                                                                                                                                         |
| C.S.A Certified Wire Connector                 | Yes                                                                                                                                            |
| Panduit Color Code on Barrel                   | RED                                                                                                                                            |
| Panduit Die Index No. on Barrel                | P71                                                                                                                                            |
| Alternate Industry Die Index No. ( ) on Barrel | (18)                                                                                                                                           |

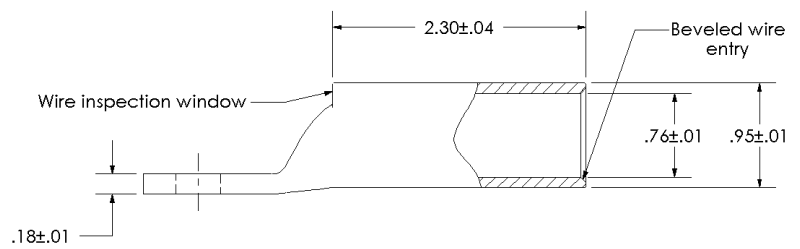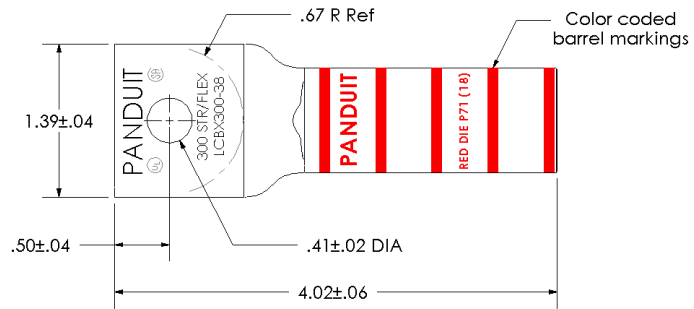

|     |      |     |     |             |                                                        |                                                 |
|-----|------|-----|-----|-------------|--------------------------------------------------------|-------------------------------------------------|
|     |      |     |     |             | <b>PANDUIT CORP. TINLEY PARK, ILLINOIS</b>             |                                                 |
|     |      |     |     |             | LCBX300-38-6<br>Copper Lug - One-Hole, Standard Barrel |                                                 |
| 00  | 6/03 | SAC | SAC | RELEASED    | 10850                                                  |                                                 |
| REV | DATE | BY  | CHK | DESCRIPTION | ECN                                                    | SCALE N/A DRAWING NO / CAD FILE LCBX300-38-CUST |