

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Panduit](#)  
[LCC250-00-X](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	250 kcmil
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Length	1-11/16 in.
Stud Size	N/A
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	YELLOW
Panduit Die Index No. on Barrel	P62
Alternate Industry Die Index No. ( ) on Barrel	(16)

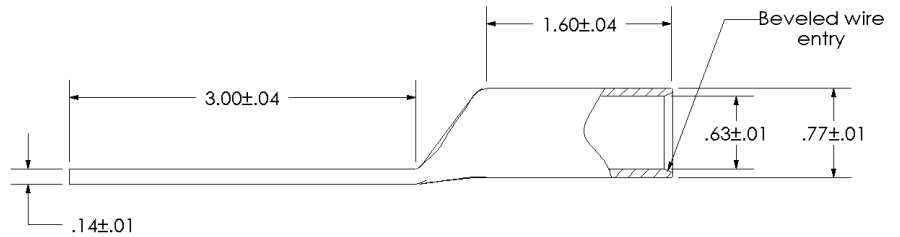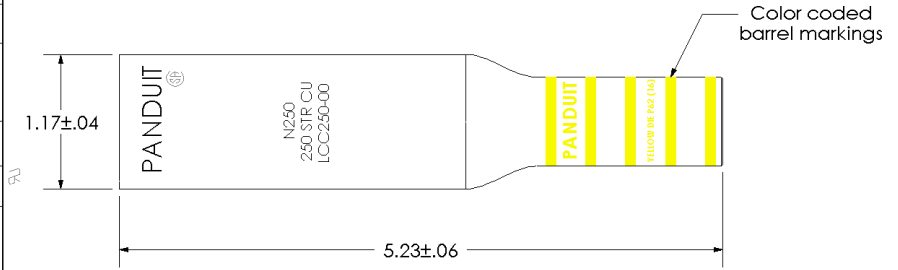

CERTIFIED

RECOGNIZED Wire Connector

REV	DATE	BY	CHK	DESCRIPTION	ECN
00	12/02	SAB	DRL	RELEASED	10333

**PANDUIT CORP.** TINLEY PARK, ILLINOIS

LCC250-00-X  
 Copper Lug - Blank Tongue, Long Barrel

SCALE	N/A	DRAWING NO / CAD FILE	LCC250-00-CUST
-------	-----	-----------------------	----------------