

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)


[LCCF750-12-3](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| | |
|--|--|
| Material | High Conductivity Seamless Copper Tube |
| Plating | Electro-Tin |
| Wire Size & Type | Stranded Copper Flex Cable; 777.7 kcmil (1925/24) Diesel Locomotive |
| Wire Strip Length | 3-1/16 in. |
| Stud Size | 1/2 in. |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating | 90 ° C |
| C.S.A Certified Wire Connector | Yes |
| Panduit Color Code on Barrel | ORANGE |
| Panduit Die Index No. on Barrel | P107 |
| Alternate Industry Die Index No. () on Barrel | (25) |

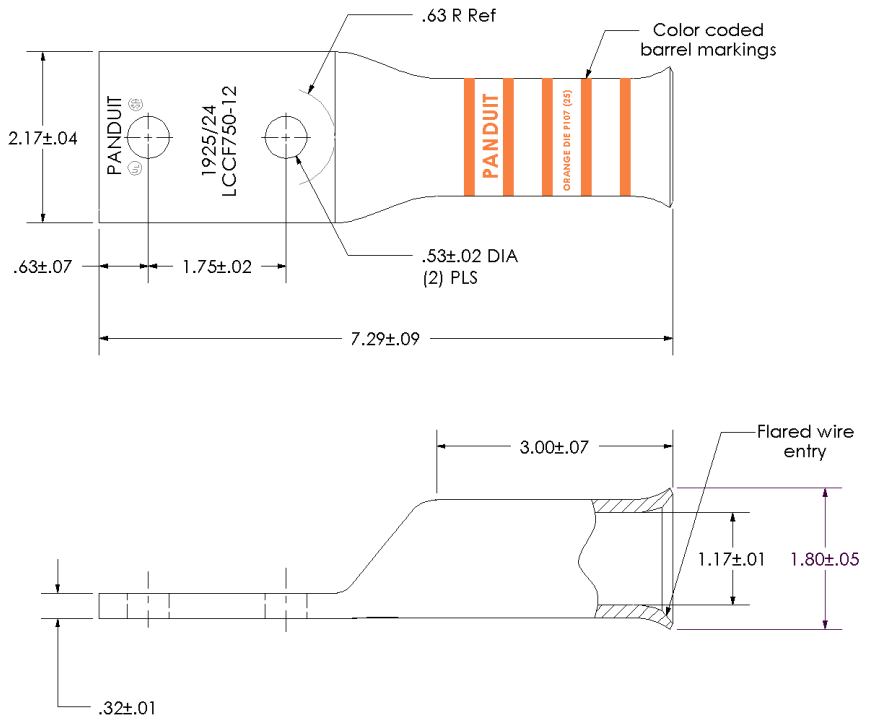

| | | | | | | | | |
|-----|------|-----|-----|---|-------|-----------|-----------------------|-----------------|
| | | | | PANDUIT CORP. TINLEY PARK, ILLINOIS | | | | |
| | | | | LCCF750-12-3 Copper Lug - Two-Hole, Flared Long Barrel | | | | |
| 00 | 6-03 | PWS | PWS | RELEASED | 10858 | | | |
| REV | DATE | BY | CHK | DESCRIPTION | ECN | SCALE N/A | DRAWING NO / CAD FILE | LCCF750-12-CUST |