

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)


[LCCX250-12-X](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



|                                                      |                                                                                                                                                            |
|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                                             | High Conductivity<br>Seamless Copper Tube                                                                                                                  |
| Plating                                              | Electro-Tin                                                                                                                                                |
| Wire Size                                            | 250 STR/FLEX                                                                                                                                               |
| Wire Type                                            | Stranded Copper:<br>Class G, H, I, K, M,<br>Locomotive                                                                                                     |
| Wire Strip Length                                    | 2-5/16 in.                                                                                                                                                 |
| Stud Size                                            | 1/2 in.                                                                                                                                                    |
| UL Listed Wire<br>Connector                          | Yes, for applications up to 35kv.<br>Consult cable manufacturer for<br>voltage stress relief instructions<br>with applications greater than<br>2000 volts. |
| UL Temperature<br>Rating                             | 90° C                                                                                                                                                      |
| C.S.A Certified<br>Wire Connector                    | Yes                                                                                                                                                        |
| Panduit Color Code<br>on Barrel                      | YELLOW                                                                                                                                                     |
| Panduit Die Index No.<br>on Barrel                   | P62                                                                                                                                                        |
| Alternate Industry<br>Die Index No. ( )<br>on Barrel | (16)                                                                                                                                                       |

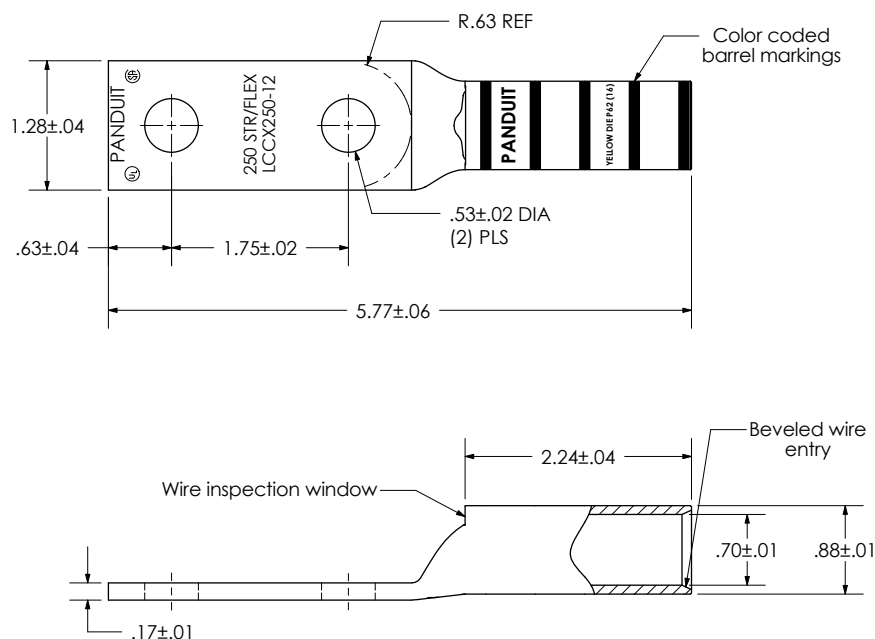

|     |      |      |      |             |     |  |                                                                     |
|-----|------|------|------|-------------|-----|--------------------------------------------------------------------------------------|---------------------------------------------------------------------|
|     |      |      |      |             |     |                                                                                      |                                                                     |
|     |      |      |      |             |     |                                                                                      |                                                                     |
| 00  | 4/09 | JHNU | JHNU | RELEASED    |     |                                                                                      | LCCX250-12-X<br>Copper Lug - Two-Hole, Long Flex Barrel with Window |
| REV | DATE | BY   | CHK  | DESCRIPTION | ECN | SCALE<br>N/A                                                                         | DRAWING NO / CAD FILE<br>LCCX250-12-CUST                            |