

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)

[LCCXN650-12-6](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	650 STR/FLEX
Wire Type	Stranded Copper: Locomotive
Wire Strip Length	3.0 in.
Stud Size	1/2 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90 ° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BLACK
Panduit Die Index No. on Barrel	P106
Alternate Industry Die Index No. () on Barrel	(24)


Dimensions are in inches



CERTIFIED



LISTED
Wire Connector

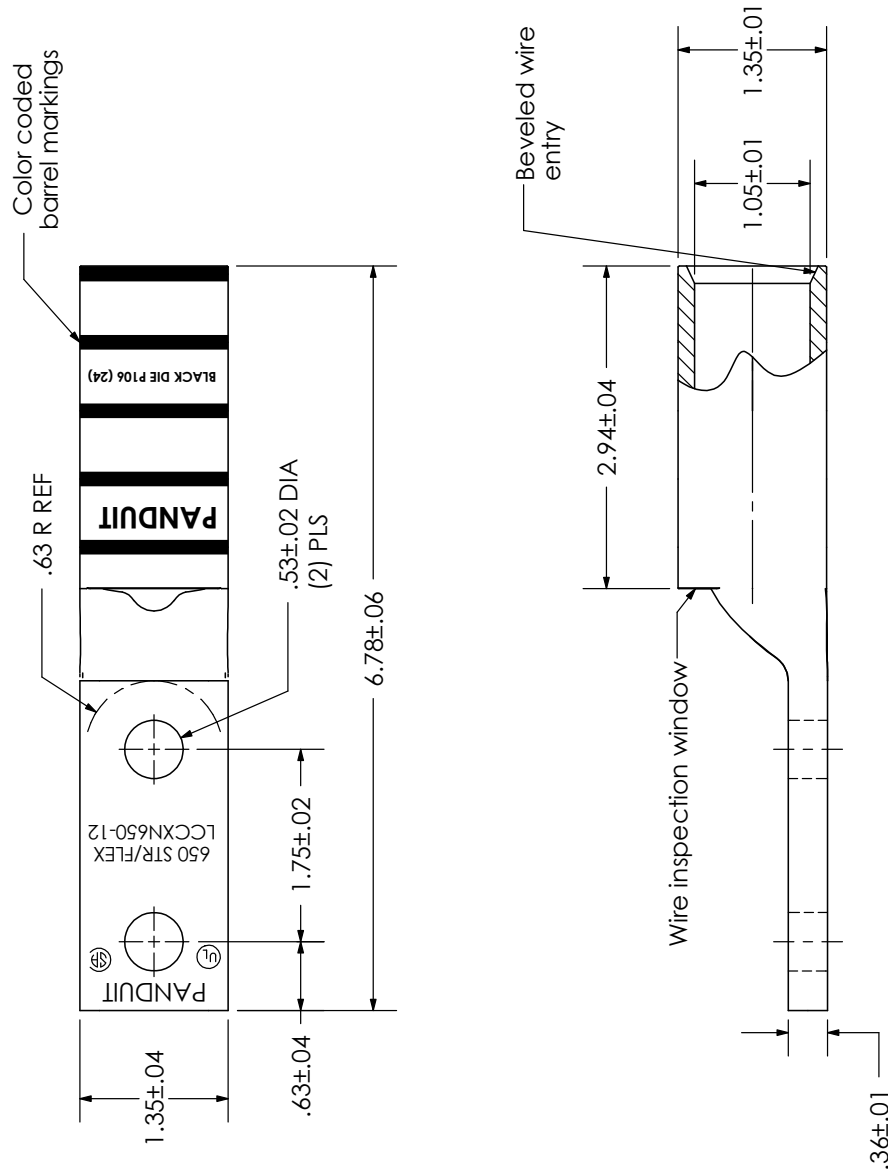

				PANDUIT CORP. TINLEY PARK, ILLINOIS			
				LCCXN650-12-6 Copper Lug - Two-Hole, Narrow Tongue, Standard Flex Barrel			
				SCALE N/A DRAWING NO / CAD FILE LCCXN650-12-CUST			
				ECN			
				DESCRIPTION			
03	5/10	JHNU	JHNU	REMOVED WARRANTY & CUSTOMER SIGNATURE NOTE			
REV	DATE	BY	CHK				