

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Panduit](#)
[GCTE2S-X0](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

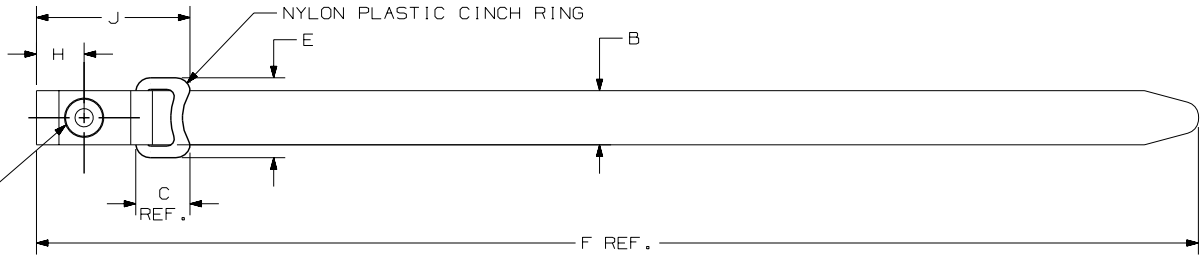

BRASS GROMMET & WASHER
 INSIDE DIAMETER: .250" - .265: (6.35-6.73 mm)
 RECOMMENDED FASTENER: #12 SCREW OR M5 SCREW

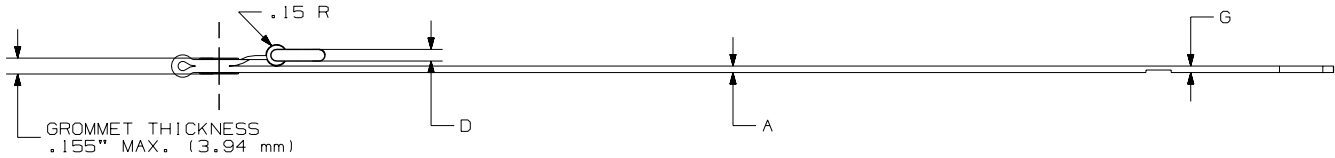

PANDUIT PART NO.	BUNDLE DIA.		A	B	C	D	E	F	G	H	J	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	APPROXIMATE WEIGHT lbs/100 PARTS (g)
	MIN. in (mm)	MAX. in (mm)												
GCTE2S	1.7 (43.5)	2.2 (55.8)	.100 (2.5)	.75 (19.1)	.750 (19.1)	.156 (4.0)	1.10 (27.9)	10.5 (267)	.100 (2.5)	.66 (16.8)	2.12 (53.8)	50 (222)	STANDARD	.93 (421)
GCTE4S	2.7 (68.5)	4.1 (104.1)	.100 (2.5)	.75 (19.1)	.750 (19.1)	.156 (4.0)	1.10 (27.9)	16.5 (419)	.100 (2.5)	.66 (16.8)	2.12 (53.8)	50 (222)	STANDARD	1.12 (506)

NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.
- MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS.

SS-27341-00.prt

PANDUIT CORP. TINLEY PARK, ILLINOIS

TAK-TY HOOK & LOOP CABLE TIES
 GROMMET CINCH TIE END MOUNT

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONAL TOLERANCES ARE:
 (.X) ± .25 (.XXX) ± .030
 (.XX) ± .125 ANGLES ±

UNLESS OTHERWISE SPECIFIED,
 ALL DIMENSIONS ARE GIVEN
 IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
 JABO
 DATE
 12/7/01
 CHK'D
 DWW

MAT'L:
 WOVEN NYLON
 HOOK/LOOP
 COLOR: BLACK
 EXCEPT GROMMET

SCALE NONE

DRAWING NO.
 SS-27341
 DWG
 A
 SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
5	4/12/06	FAB		ADDED WEIGHTS TO DRAWING	27341	5		