

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)


[JMSBCB87-3-X](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PRODUCT WORKS WITH PANDUIT PART NUMBERS:	APPLICATION SURFACE:	WEIGHT lbs / 10 (g) / pcs.
JMSBCB87-3- <u> </u>	JMJH2 JMOD CABLE SUPPORT	BEAMS UP TO 0.75" (19.05mm) THICK	7.34 (3329)

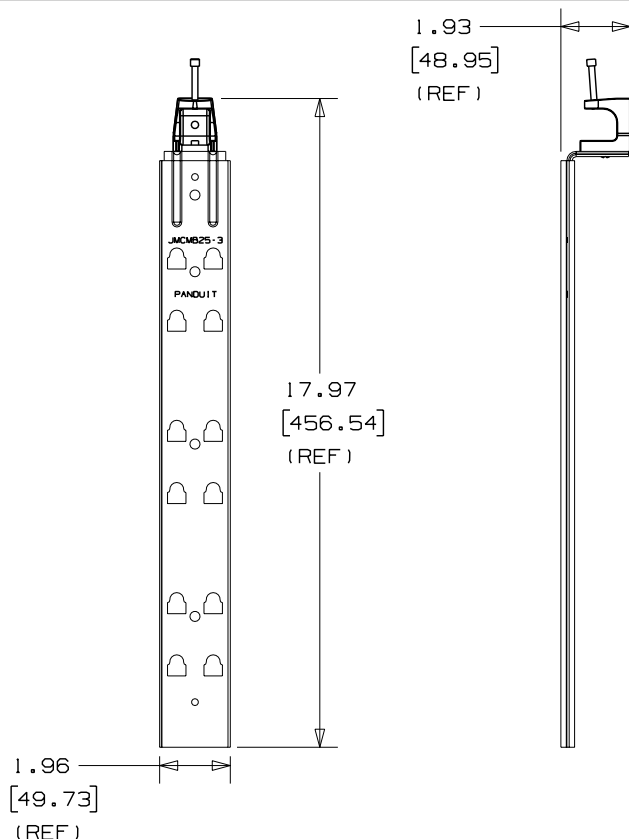

NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- SCREW USED TO ATTACH THE BEAM CLAMP TO THE METAL BRACKET CAN BE LOOSENED ALLOWING USER TO VARY INSTALLED ANGLE. AFTER BEAM CLAMP HAS BEEN ROTATED TO THE DESIRED ANGLE, USER SHOULD RE-TIGHTEN THE SCREW.
- ASSEMBLY COMPONENT MATERIALS:
 - PRE-GLAVANIZED STEEL (JMCMB25-1)
 - ZINC PLATED STEEL (BOLT)
 - MALLEABLE IRON (BEAM CLAMP)
- RATED STATIC LOAD:
180 lbs. (81.65kg)
- JMSBCB87-3 WILL ACCEPT UP TO SIX MJH2 J HOOK PRODUCTS.



DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS G02672DV_PS_JMSBCB873_01

PANDUIT

CORP. TINLEY PARK, ILLINOIS

JMOD BEAM CLAMP
BRACKET ASSEMBLY
(JMSBCB87-3-)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ±0.05 (1.3) (XXX) ±0.010 (0.25)
(.XX) ±0.02 (0.5) ANGLES ±5°

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY JAD

MAT'L:

SCALE NONE

DATE 3/7/03

SEE NOTE 3

DRAWING NO.

GB2672DV

DWG
SIZE
A

1	2/20/06	JAD		UPDATE APPLICATION SURFACE CALLOUT, WAS .88"	GB2722DV	1			
REV	DATE	BY	CHK	DESCRIPTION	ECN	-	R	CUST	SUP