

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)

[PUM-071-C0](#)

For any questions, you can email us directly:

sales@integrated-circuit.com





THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORPORATION.

PANDUIT PART NUMBER	USED WITH CABLE TIES	DIMENSIONS				MATERIAL	WEIGHT grams/100pcs
		'A' (REF)	'B' (REF)	'C'	'D' (REF)		
PUM-071 - _30	M, I , S	16.5	6.6	16.9	10.4	HEAT STABILIZED NYLON 6/6 BLACK	44.35

NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, AND COLOR.
- (*) DIMENSIONAL VARIANCE IS POSSIBLE DUE TO MOLDING PROCESS RELATED SINK MARKS.
- APPLICATION SPECIFICATION:
HOLE DIAMETER: 6.3 - 7.1 mm
PANEL THICKNESS: 0.8 - 7.0 mm

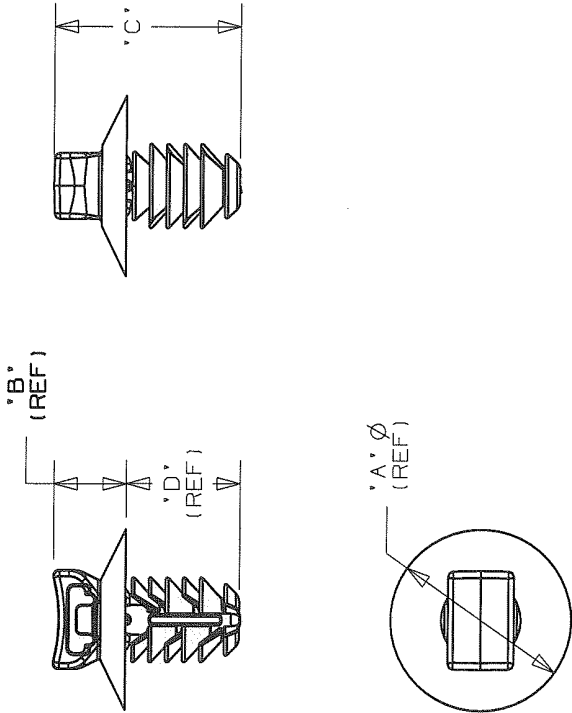

SCALE 2:1

CAD FILENAME/LAYERS										G03151BB_DC_GB0239MJ/10B																													
PANDUIT										CORP.										TINLEY PARK, ILLINOIS																			
PUM-071 - _30										PUSH UMBRELLA MOUNT 071																													
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE METRIC TOLERANCE: ±0.5MM																																							
DRAWN BY										TMSA										MAT'L:										SCALE 1:1 UNLESS NOTED									
DATE										8-11-06										SEE TABLE										DRAWING NO.									
CHK'D										KLW																				GB0239MJ									
																														DWG									
																														A									
																														SIZE									
																				</																			