

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)
[CT-8250HP](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

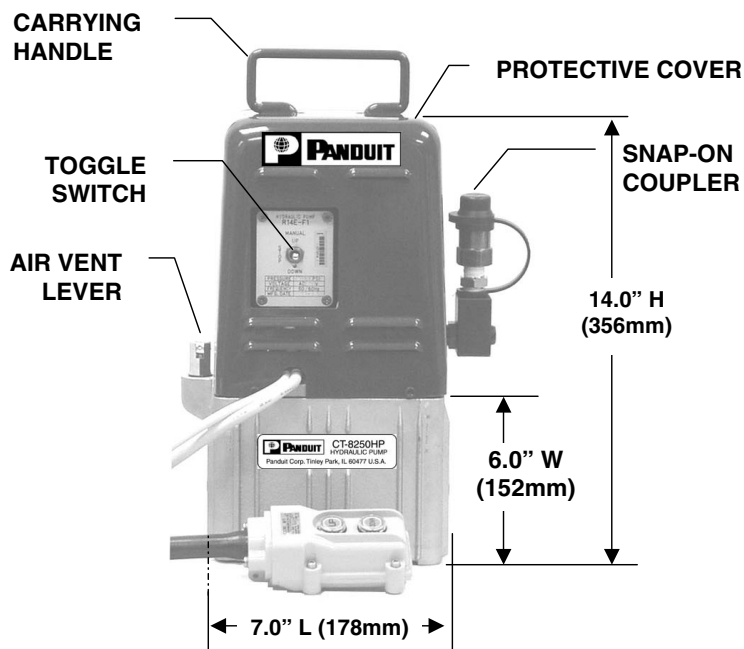

NOTES, UNLESS OTHERWISE SPECIFIED:

FULLY AUTOMATIC PUMP SPECIFICATIONS

MOTOR:

Type: Commutator
RPM: 1200
Voltage: AC 120V
Frequency: 50/60 Hz
Current: 6.5A
Horsepower: ½

PUMP:

Low Pressure: 20kg/cm² (300 psi)
Delivery: 2.6 Liters/Min.
High Pressure: 525 Kg/cm² (7,500 psi)
Delivery: .32 Liters/Min.
Oil Tank Cap.: 2 Liters
Weight: 15 kg (33 lbs.)
Fluid Type: EP Hydraulic Oil 32MV
Housing Color: Green

SEE SHEET 2 FOR FEATURES

F:\wrkgrp\rvusers\ENGR DOCS-NEW\CUST
DWGS\TP24552A01_01 CT-8250HP CD.doc

PANDUIT

CORP. TINLEY PARK, ILLINOIS

CT-8250HP*CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:

(.x) ± --- (.xxx) ± ---
(.xx) ± --- ANGLES ± ---

UNLESS OTHERWISE
SPECIFIED, ALL DIMENSIONS
ARE GIVEN IN INCHES, THIRD
ANGLE PROJECTION.

DRAWN BY:
BLR

MATL:

SCALE

NONE

DATE:
8-08-07

DRAWING NO.

TP24552A01

DWG
A
SIZE

01	8-08-07	BLR	BJPU	REDRAWN	4255	--	JRWA	
REV	DATE	BY	CHK'D	DESCRIPTION	ECN	-R	CUST	SUP

NOTE: Used with separate crimping head, hydraulic pump and hose

- Crimps with CT-930LPCH and CT-980LPCH remote crimping heads:
 - CT-930LPCH – Accepts up to 8 AWG to 250MCM Copper *PANDUIT* compression connectors
 - CT-980LPCH – Accepts 4 AWG to 250MCM Copper *PANDUIT* compression connectors
- CT-900LPHPH pre-filled hydraulic 10 foot hose
- ❖ All above hose, pump and crimp heads are supplied with Parker SC Series Dripless hydraulic couplers

FEATURES:

- Manual Control
- Remote pump control
- Pressure adjustment 300 to 7,500 psi
- Visual fluid level
- External air vent and filler port
- Heavy gauge steel protective cover
- Two stage pumping action
- Automatic bypass when predetermined pressure is reached – pump shuts off automatically
- Built-in electrical solenoid switch to allow quick release of any cutter or crimper
- Small, compact, portable unit with carrying handle – standard 3/8" tap

SEE SHEET 1 FOR TOOL SPECIFICATIONS

[illegible]